



**DECADES AHEAD<sup>®</sup>**  
**high power RF devices**

**Werlatone<sup>®</sup>, Inc.**





17 Jon Barrett Road Patterson, New York 12563  
 T (845) 278 2220      www.werlatone.com  
 F (845) 278 3440      sales@werlatone.com



## 4-Way Combiner/Divider

### Model D6774

Frequency:	1.5 - 32 MHz
Power:	20,000 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.20:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.15 dB Max.

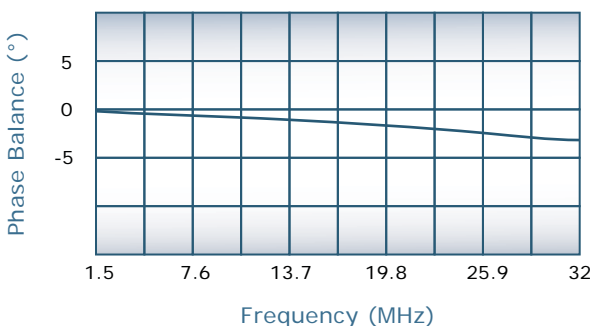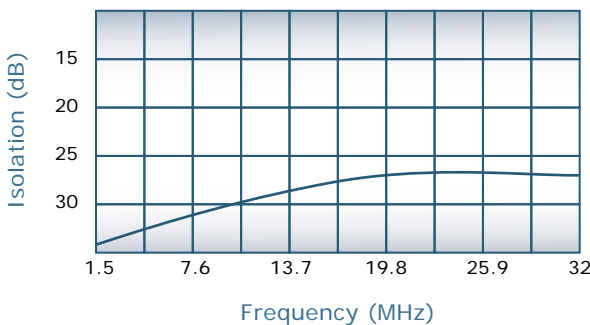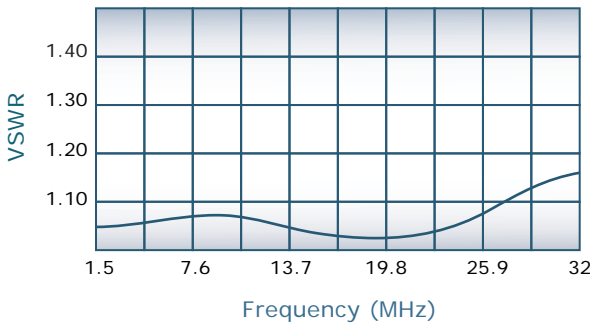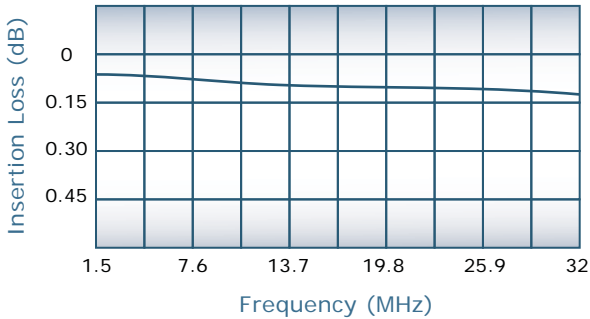

#### Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate Connector Configurations Upon Request
- Weight: 113 Pounds
- Operating Temperature: -55°C to +75°C
- Supplied with 110V AC Fans

#### Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)	J6-J10 (Loads)
D6774-88	1 5/8" EIA	LC Female	SC Female

