

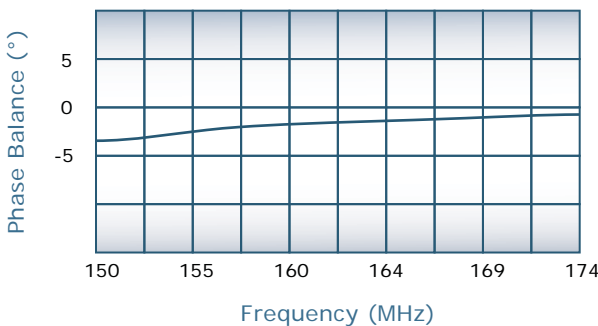
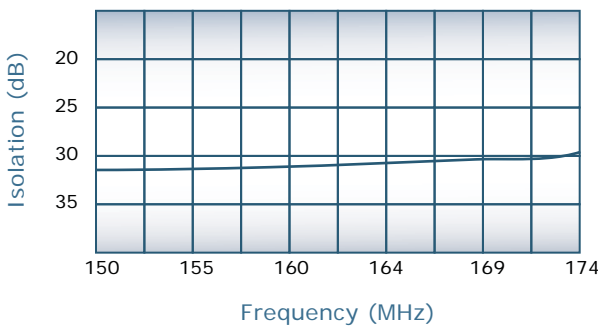


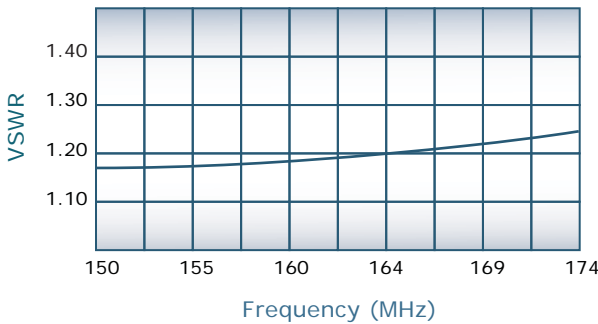

DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

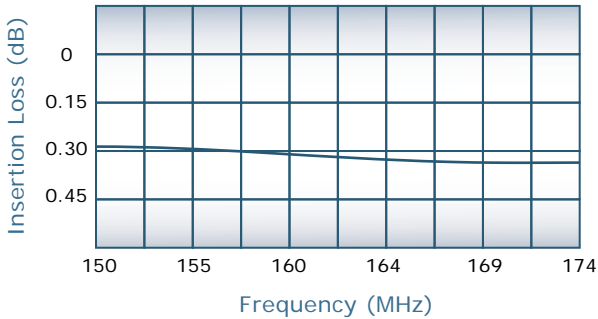

Specifications subject to change without notice

4-Way Combiner/Divider

Model D7007


Frequency:	150 -174 MHz
Power:	200 W CW 50 W / Input Non-Coherent
Insertion Loss:	0.35 dB Max.
VSWR:	1.25:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.15 dB Max.

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate Connector Configurations Upon Request
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D7007-10	N Female	N Female
D7007-12	N Female	SMA
D7007-102	SMA	SMA

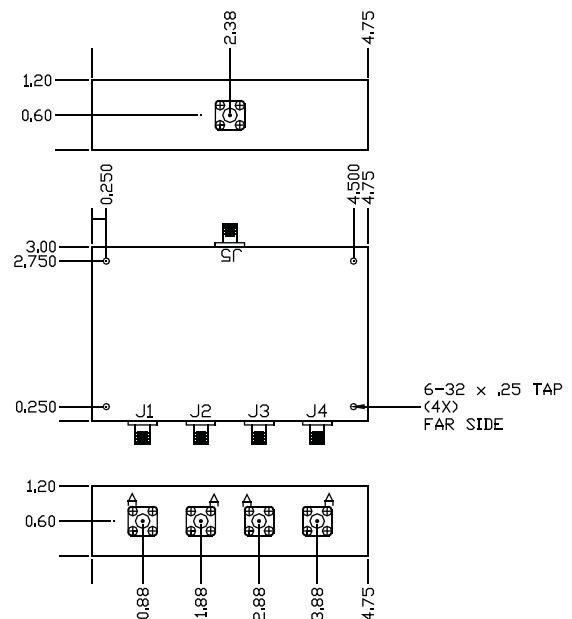

Send Us Your Specs for Custom Designs