




DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



3-Way Combiner/Divider

Model D7070

Frequency:	30 - 500 MHz
Power:	100 W CW
Insertion Loss:	0.75 dB Max.
VSWR:	1.35:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.3 dB Max.

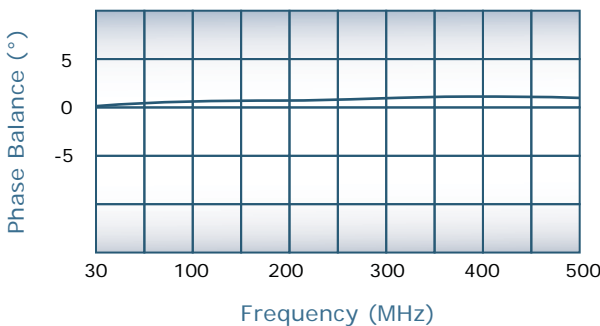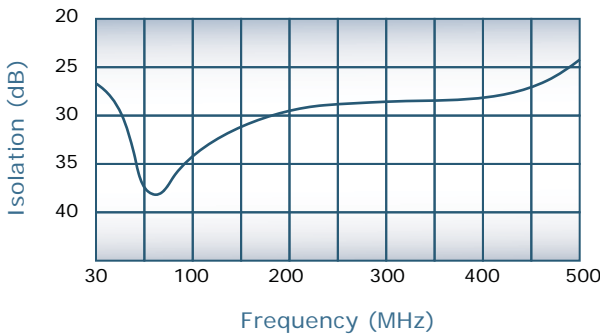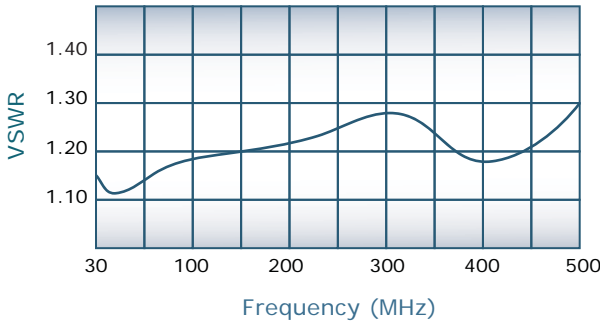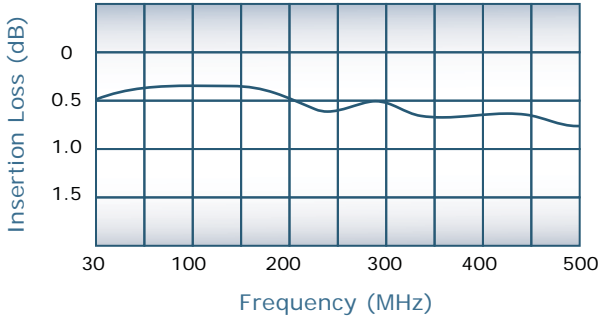


Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 2 Pounds
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2-J4 (Input/Output)
D7070-10	N Female	N Female
D7070-12	N Female	SMA
D7070-102*	SMA	SMA

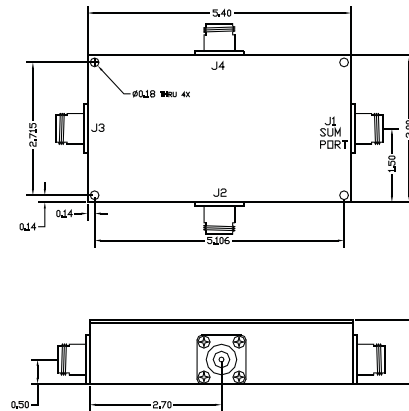

(*) Note location of SMA connectors for "-102" connector configuration.

