



**DECADES AHEAD<sup>®</sup>**  
high power RF devices





**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com



**4-Way Combiner/Divider**  
**Model D7587**

Frequency:	20 - 500 MHz
Power:	100 W CW 5 W / Input Non-Coherent
Insertion Loss:	0.5 dB Max.
VSWR:	1.30:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

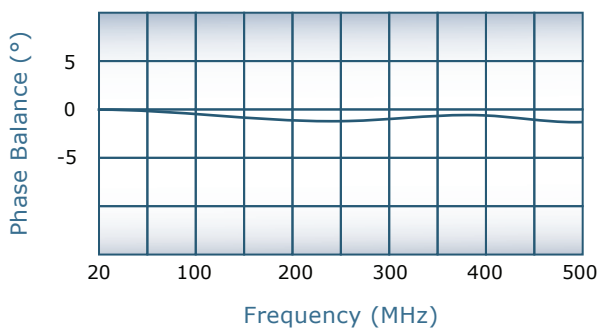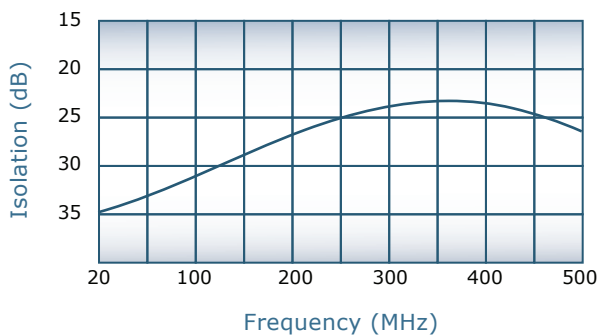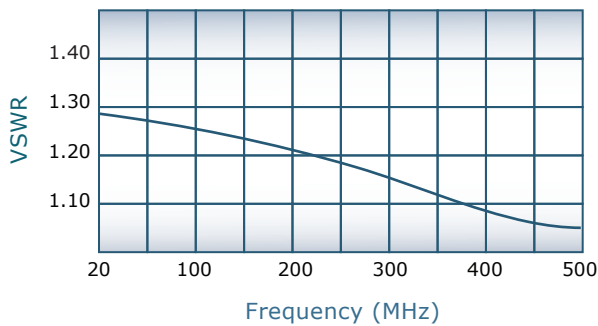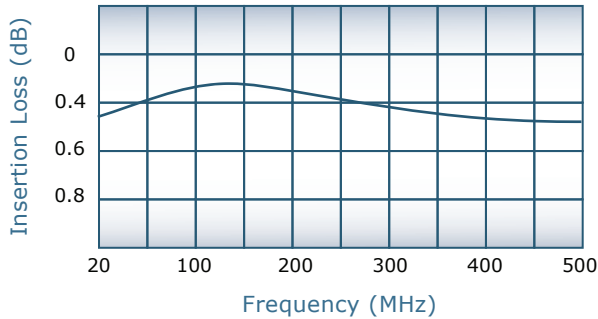


**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 13.5 Ounces
- Operating Temperature: -55°C to +75°C

**Connector Configurations**

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D7587-12	SMA	SMA
D7587-102	SMA	SMA
D7587-113	BNC	BNC
D7587-300	TNC	TNC

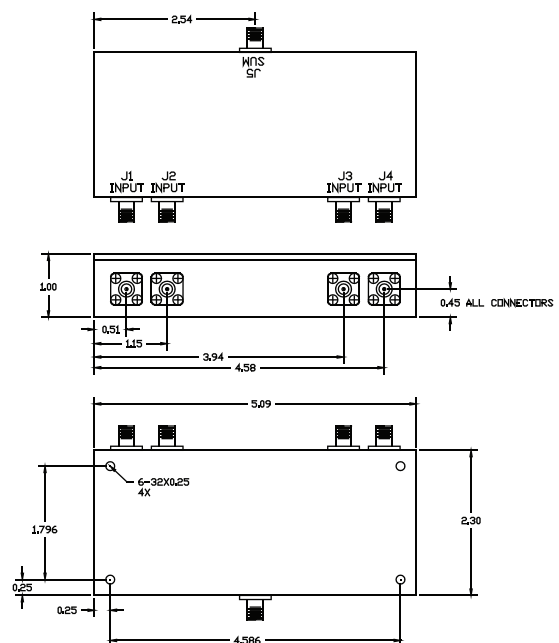

Specifications subject to change without notice



**Send Us Your Specs for Custom Designs**