



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



2-Way Combiner/Divider

Model D7626

Frequency: 100 - 500 MHz

Power: 25 W CW





Insertion Loss: 0.5 dB Max.

VSWR: 1.35: 1 Max.

Isolation: 25 dB Min.

Phase Balance: $\pm 5^\circ$ Max.

Amplitude Balance: 0.1 dB Max.

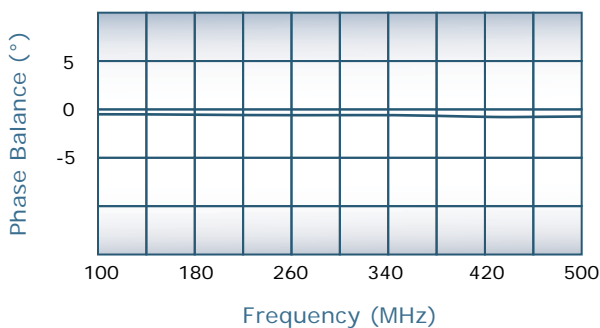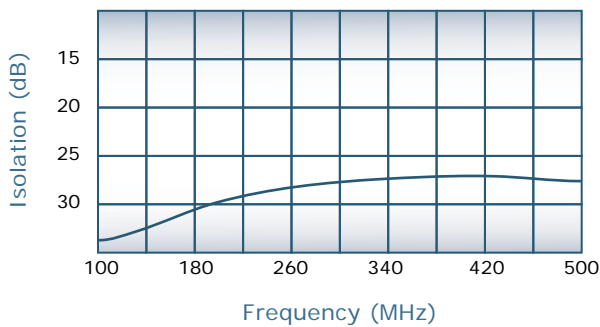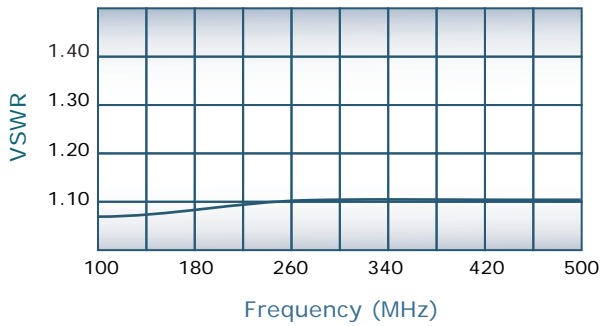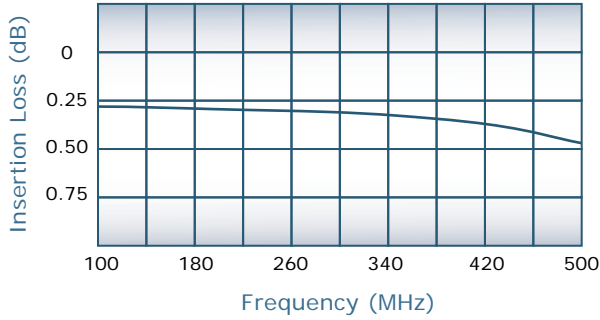

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 0.5 Pounds
- Operating Temperature: -55°C to +75°C
- For SMA Connector version, view Model D6100

Connector Configurations

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D7626-10	N Female	N Female
D7626-12	N Female	SMA
D7626-13	N Female	BNC

