




**DECADES AHEAD<sup>®</sup>**  
**high power RF devices**

**Werlatone<sup>®</sup>, Inc.**





17 Jon Barrett Road Patterson, New York 12563  
 T (845) 278 2220      www.werlatone.com  
 F (845) 278 3440      sales@werlatone.com



**4-Way Combiner/Divider**

**Model D7695**

Frequency:	900 - 1300 MHz
Power:	200 W CW
Insertion Loss:	0.4 dB Max.
VSWR:	1.30:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

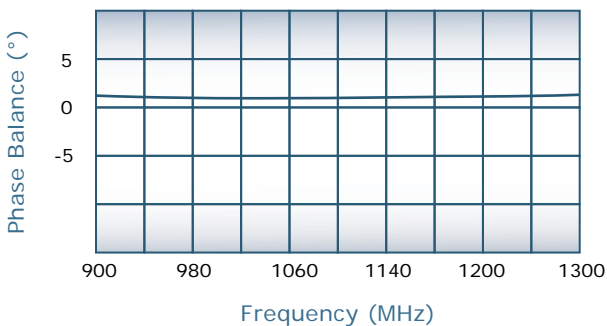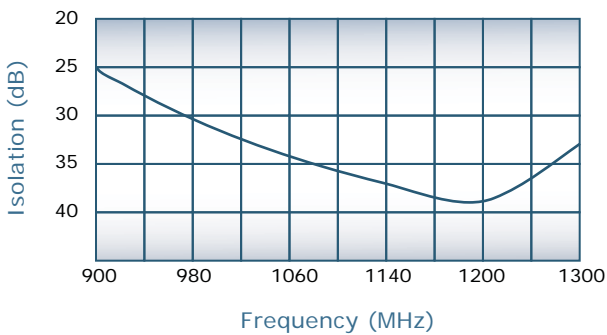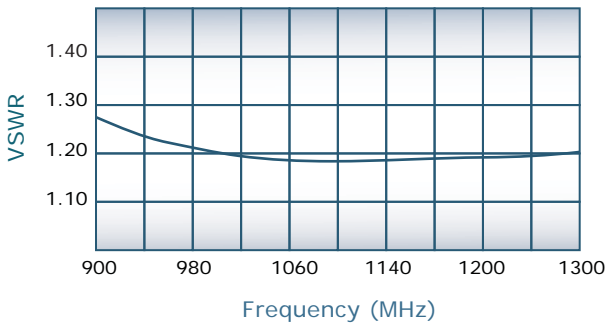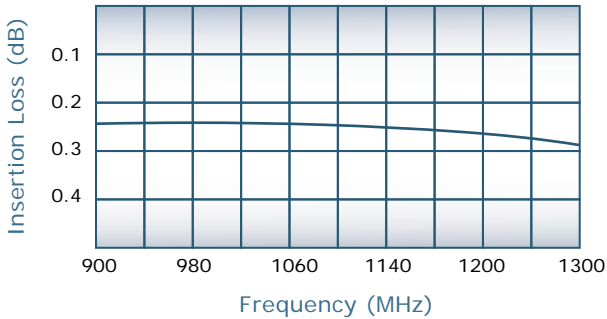

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 12 Ounces
- Operating Temperature: -55°C to +85°C

**Connector Configurations**

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D7695-12	N Female	SMA
D7695-102	SMA	SMA

