



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

3-Way Combiner/Divider

Model D8032

Frequency: 25 - 450 MHz

Power: 200 W CW





Insertion Loss: 0.75 dB Max.

VSWR: 1.35:1 Max.

Isolation: 20 dB Min.

Phase Balance: $\pm 5^\circ$ Max.

Amplitude Balance: 0.3 dB Max.

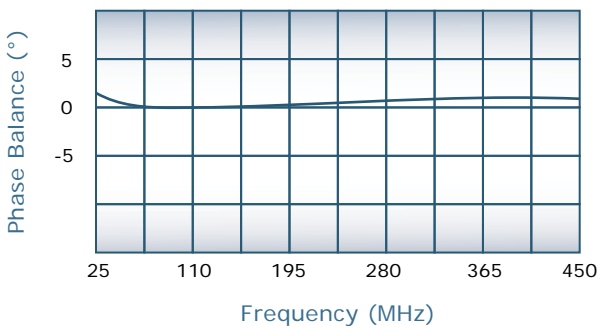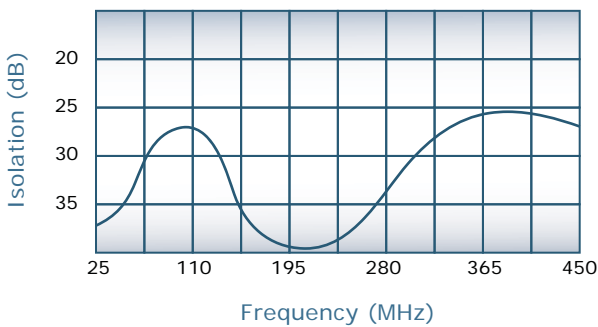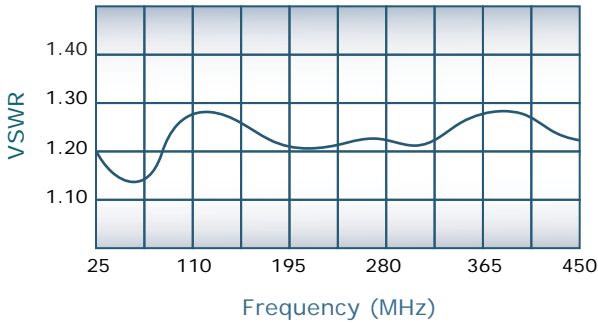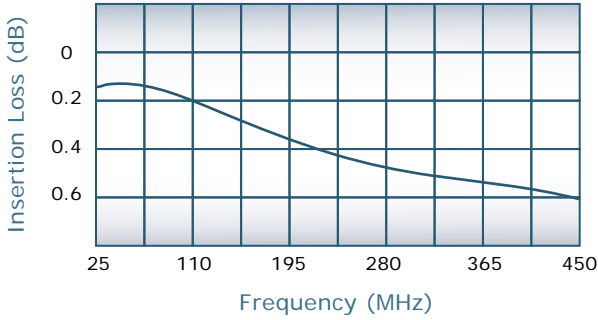

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2-J4 (Input/Output)
D8032-102	SMA	SMA
D8032-302	TNC Female	SMA

