DECADES AHEAD®

high power RF devices

Werlatone®, Inc.
17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com

2-Way Combiner/Divider

Model D8123

Frequency:	20 - 60 MHz
Power:	5,000 W CW
Insertion Loss:	0.2 dB Max.
VSWR:	1.25:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.1 dB Max.

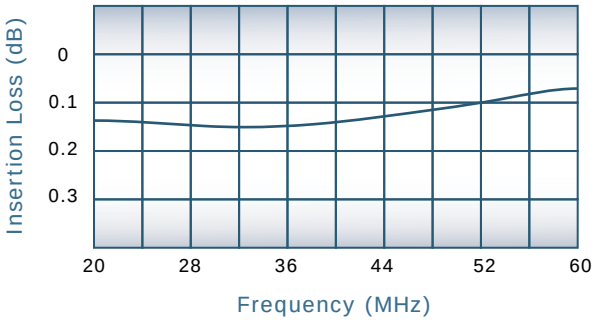

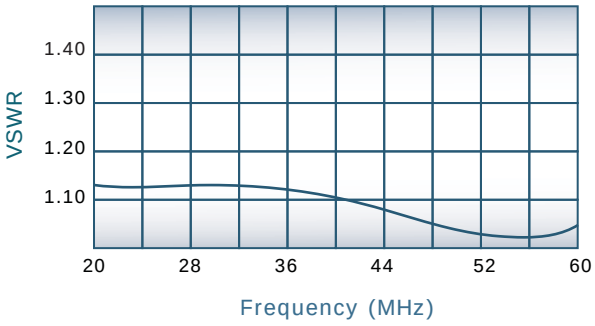

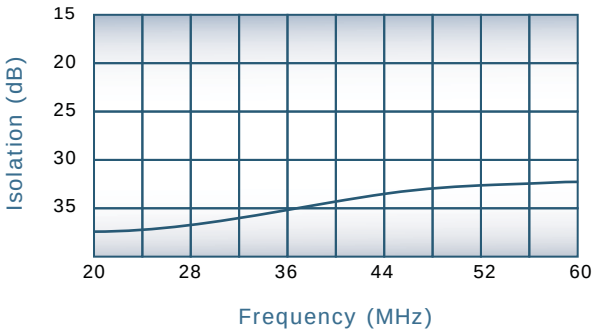

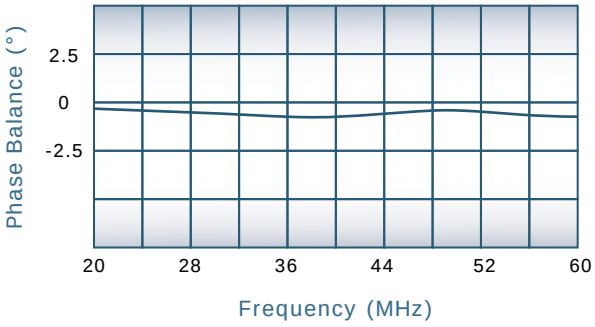

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C
- J4 Port: Isoalted Load (SC Female Connector)

Connector Configurations

Model	J3 (Sum Port)	J1,J2 (Input/Output)
D8123-390	SC Female	N Female

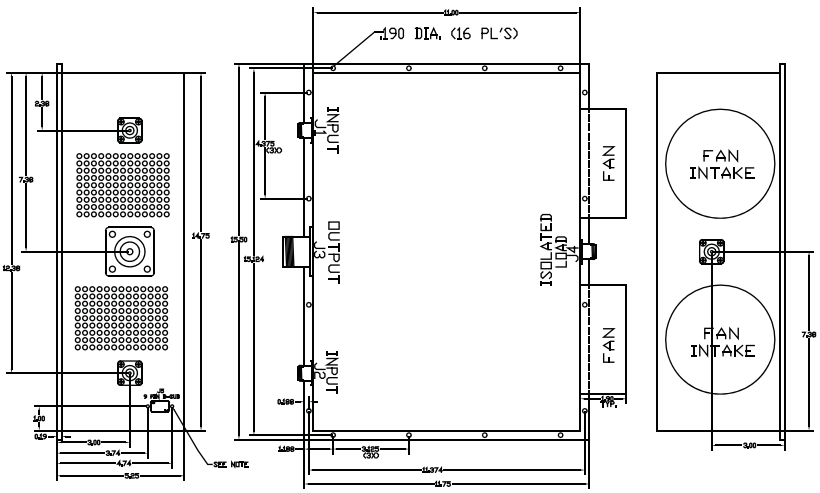

Specifications subject to change without notice

Send Us Your Specs for Custom Designs