



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com

3-Way Combiner/Divider

Model D8146

Frequency:	20 - 130 MHz
Power:	1,500 W CW
Insertion Loss:	0.35 dB Max.
VSWR:	1.40:1 Max.
Isolation:	18 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

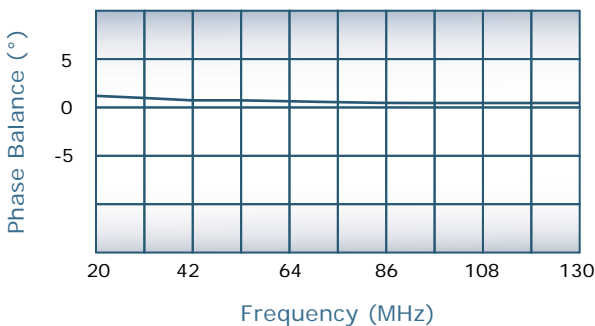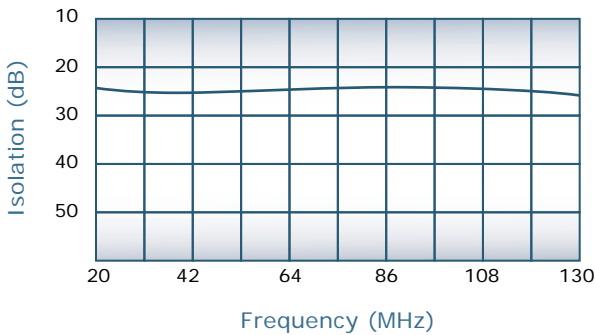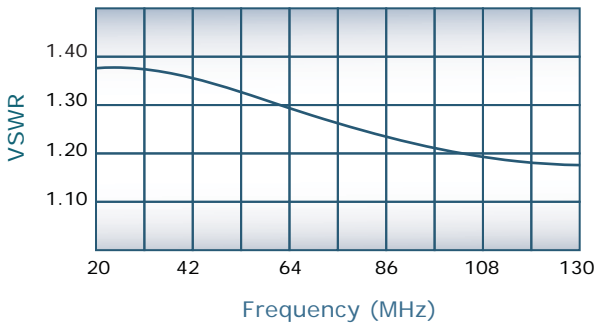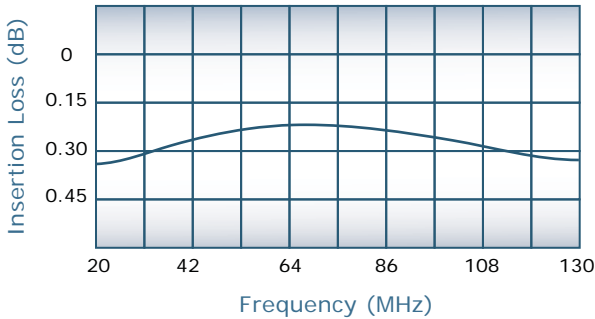

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 8 Pounds
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2-J4 (Input/Output)
D8146-20	7/16 Female	N Female
D8146-22	7/16 Female	SMA
D8146-23	7/16 Female	BNC

