



**DECADES AHEAD<sup>®</sup>**  
high power RF devices





**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com



## 4-Way Combiner/Divider Model D8230

Frequency:	1 - 30 MHz
Power:	2500 W CW
Insertion Loss:	0.2 dB Max.
VSWR:	1.15:1 Max.
Isolation:	30 dB Min.
Phase Balance:	$\pm 5^\circ$ Max.
Amplitude Balance:	0.15 dB Max.

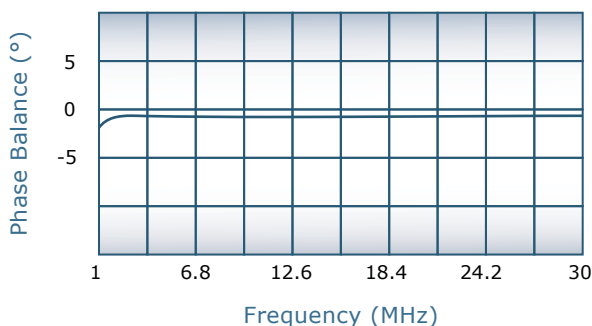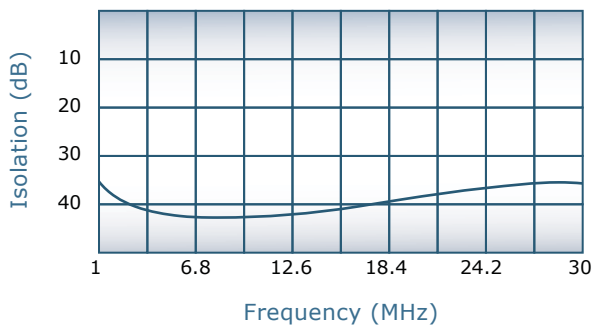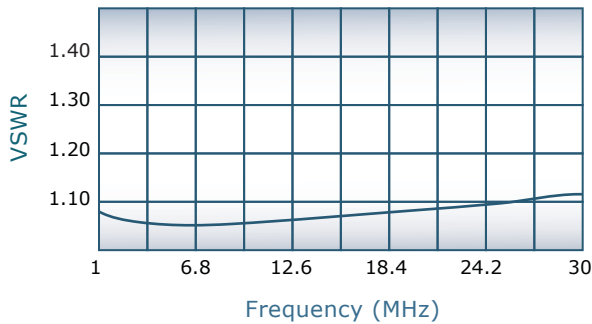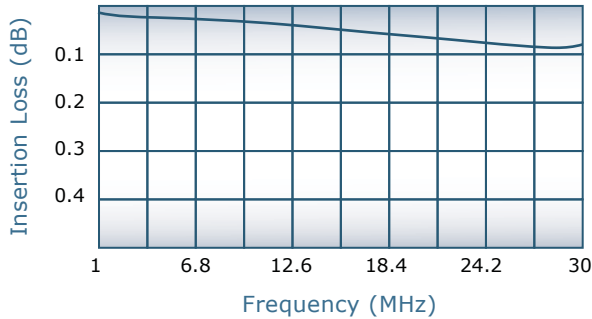

### Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate configurations upon request
- \* Unit must be mounted to a suitable heatsink, capable of maintaining a unit baseplate temperature of  $\leq +60^\circ$  C.

### Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D8230-20	7/16 Female	N Female
D8230-41	SC Female	N Female

