




DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



2-Way Combiner/Divider
Model D8265

Frequency:	1 - 50 MHz
Power:	5,000 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.25: 1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.15 dB Max.

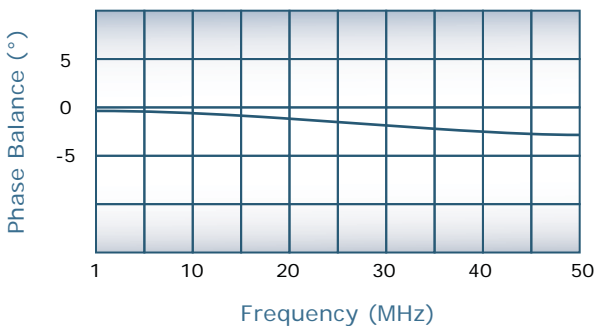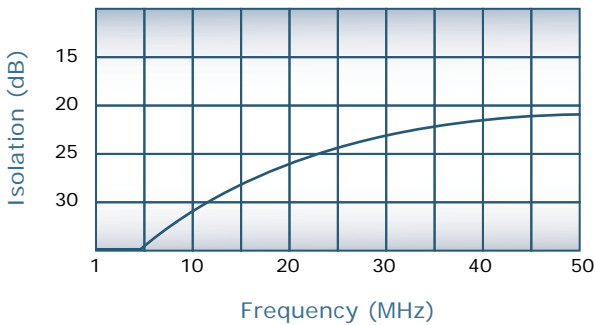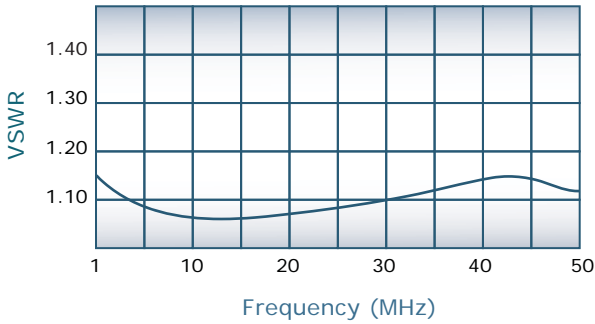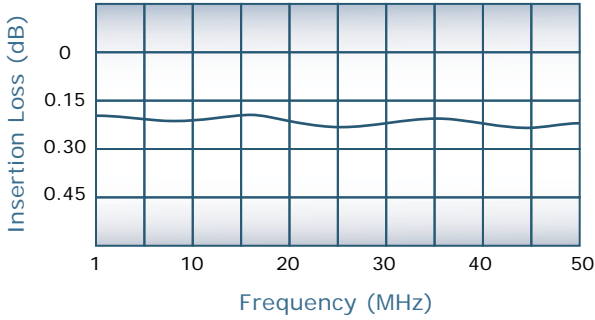

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C
- **J4 Port: Isolated Load (N Female Connector)**

Connector Configurations

Model	J3 (Sum Port)	J1,J2 (Input/Output)
D8265-393	LC Female	SC Female

