



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com

8-Way Combiner/Divider

Model D9079

Frequency:	10 - 165 MHz
Power:	800 W CW
Insertion Loss:	0.65 dB Max.
VSWR:	1.50:1 Max.
Isolation:	20 dB Min.
Phase Balance:	$\pm 5^\circ$ Max.
Amplitude Balance:	0.35 dB Max.

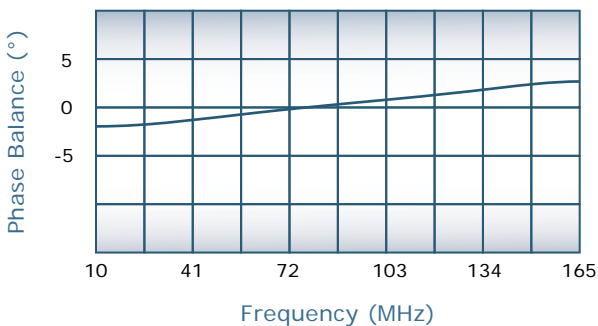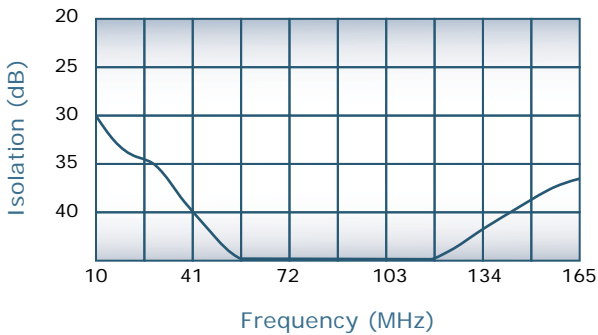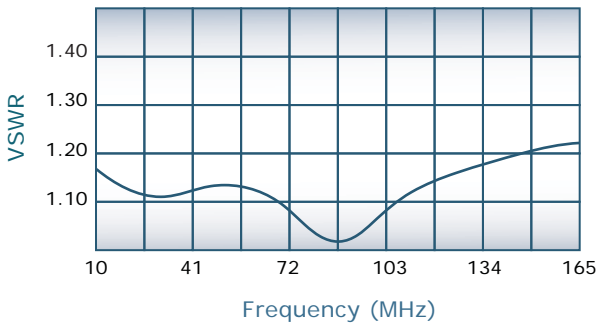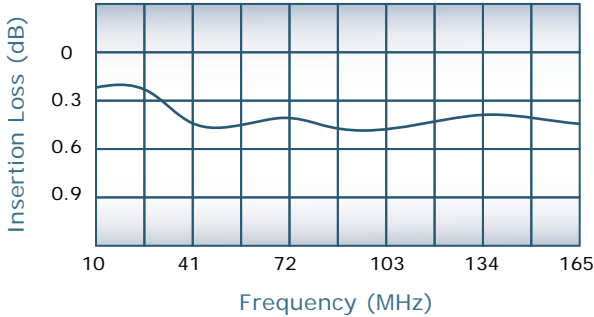

Supplied with 45° Phase Shift from Adjacent Port

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C
- Unit available without phase shifting

Connector Configurations

Model	J9 (Sum Port)	J1-J8 (Input/Output)
D9079-12	N Female	SMA

