



DECADES AHEAD[®]
high power RF devices




Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



16-Way *Radial* Combiner/Divider

Model D9194

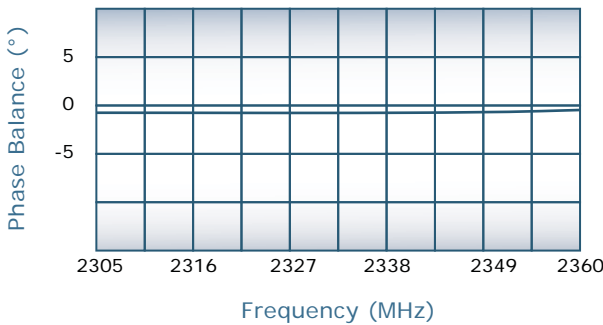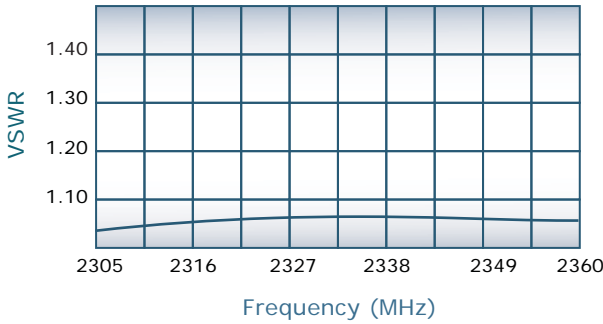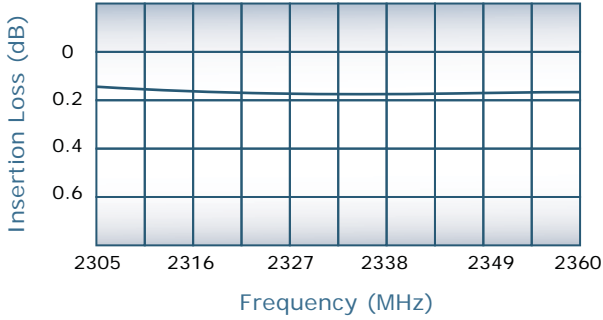


Frequency:	2305 - 2360 MHz
Power:	1,000 W CW 6 kW Peak
Insertion Loss:	0.2 dB Max.
VSWR:	1.15:1 Max.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J17 (Sum Port)	J1-J16 (Input/Output)
D9194-20	7/16 Female	N Female
D9194-22	7/16 Female	SMA
D9194-20RT	7/16 Female	Rt. Angle N Female

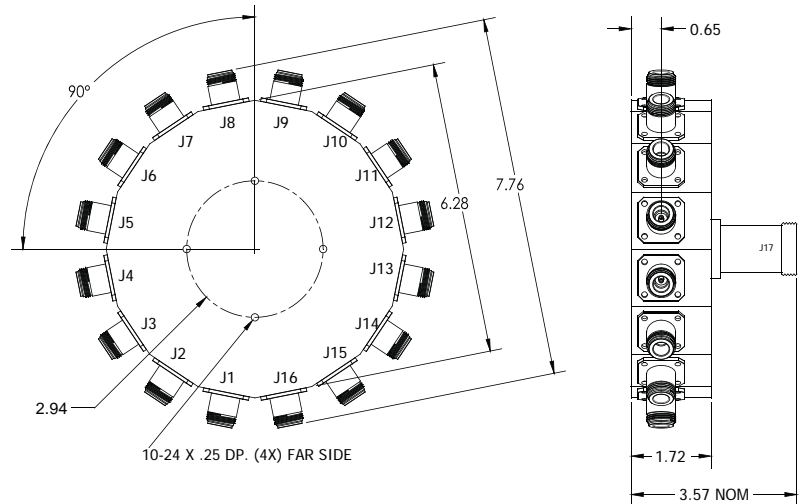

SINCE 1965

