







DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

4-Way Combiner/Divider

Model D9579

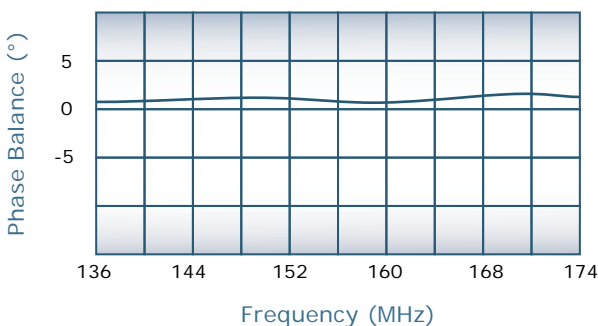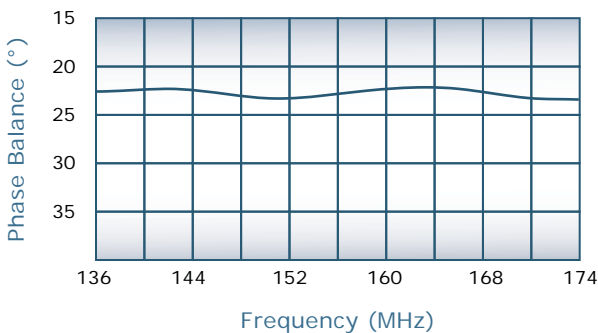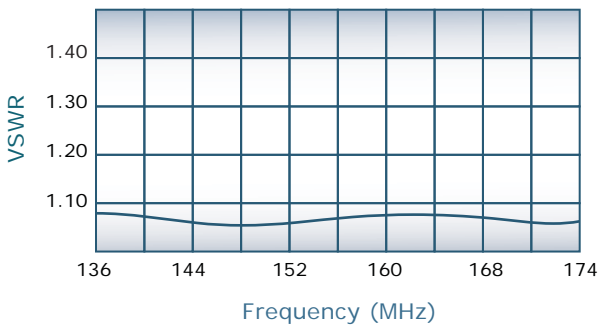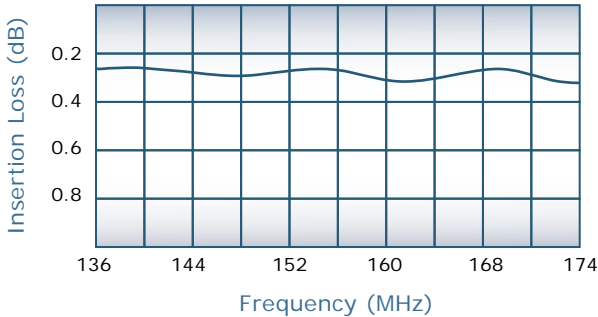

Frequency:	136 - 174 MHz
Power:	80 W CW 20 W / Input Non-Coherent
Insertion Loss:	0.35 dB Max.
VSWR:	1.20:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Weight: 1 Pound 4 Ounces
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2-J5 (Input/Output)
D9579-102	SMA	SMA

