



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

4-Way Combiner/Divider

Model D9645

Frequency:	2 - 30 MHz
Power:	4000 W CW 1 kW / Input Coherent 1 kW / Input Non-Coherent
Insertion Loss:	0.35 dB Max.
VSWR:	1.20:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

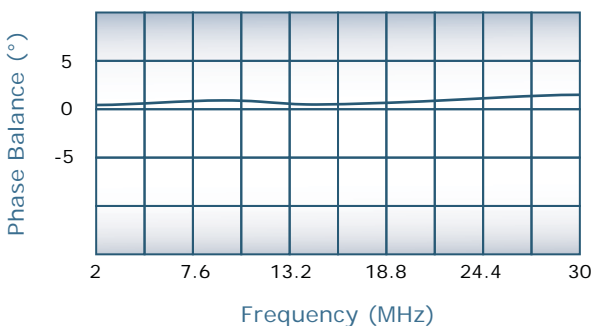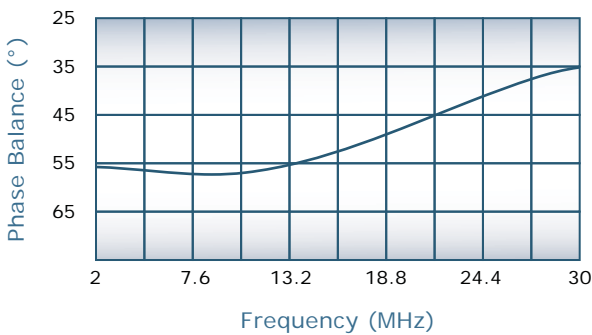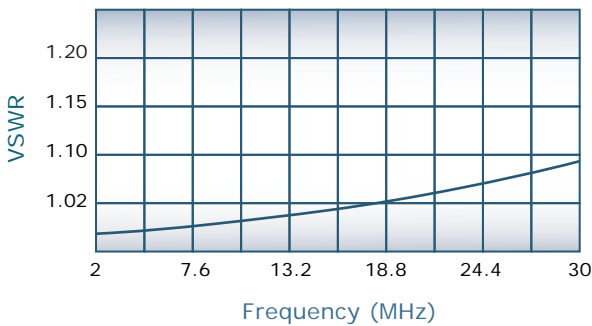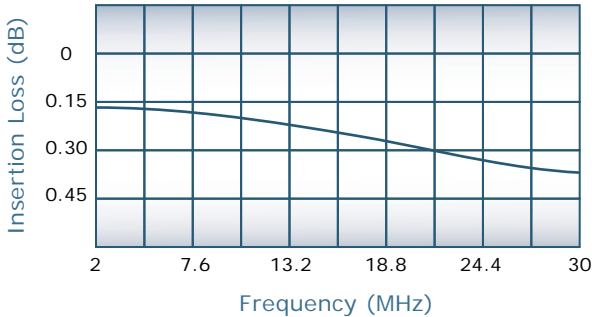

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C
- Ports J6-J9: N Female 500 W Load, J10: HN Female 200 W Load
- Port J11: MS3122E12-3S Fan Power 115V AC:
PIN A (Neutral), PIN C (Hot)
- Dust filter on front panel can be periodically removed and cleaned
- Fan exhaust shall be free of obstructions for efficient cooking air flow

Connector Configurations

Model	J1 (Sum Port)	J2-J5 (Input/Output)
D9645-20	7/16 Female	N Female

