DECADES AHEAD®

high power RF devices

Werlatone®, Inc.
17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



2-Way Combiner/Divider

Model D9888

Frequency:	1000 - 3000 MHz
Power:	500 W CW
Insertion Loss:	0.35 dB Max.
VSWR:	1.35:1 Max.
Isolation:	15 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.25 dB Max.

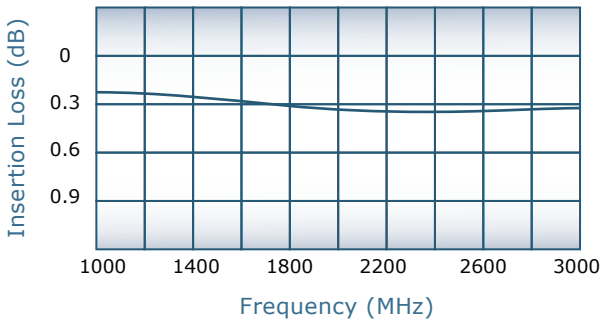

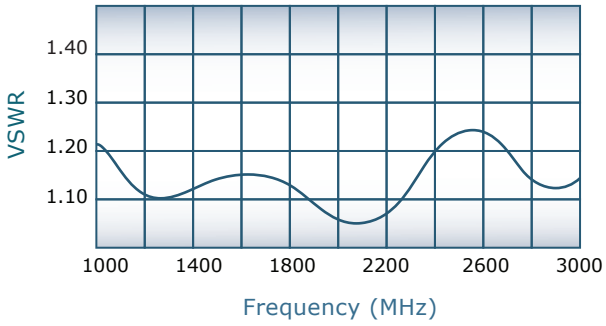

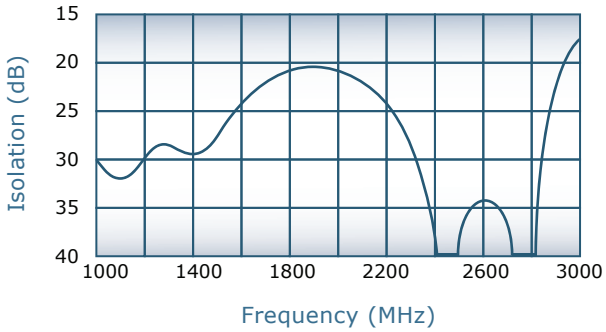

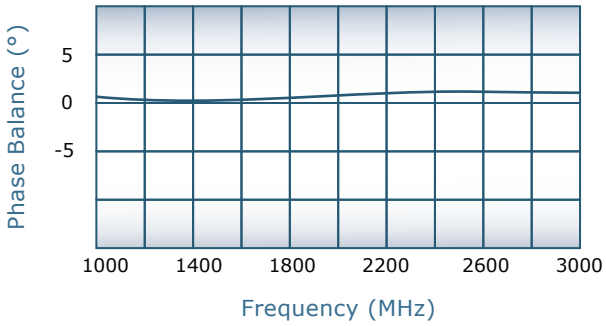

Notes

- All specifications guaranteed
- Test data provided per batch of units shipped
- Operating Temperature: -55°C to +75°C
- Surface Mount Design
- Surface Finish: Immersion silver (RoHS Compliant)
- Ports J4 & J5 require a 50 ohm termination
- Hatched areas denotes no copper
- Connectorized version available, Model D10262

Port Configurations

J1	J2, J3	J4, J5
Sum Port	Inputs/Outputs	Isolated Load Ports

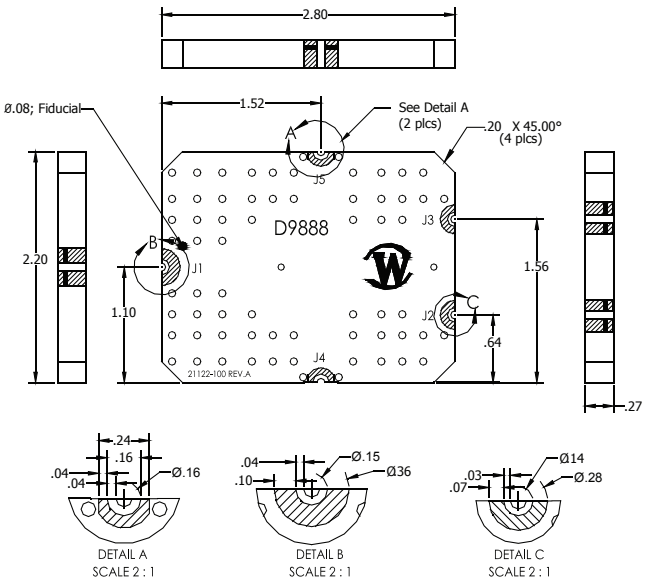

Specifications subject to change without notice

Send Us Your Specs for Custom Designs