




**DECADES AHEAD<sup>®</sup>**  
high power RF devices

**Werlatone<sup>®</sup>, Inc.**





17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com



## 2-Way Combiner/Divider

### Model D9922

Frequency:	2000 - 6000 MHz
Power:	200 W CW
Insertion Loss:	0.35 dB Max.
VSWR:	1.40:1 Max.
Isolation:	15 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.25 dB Max.

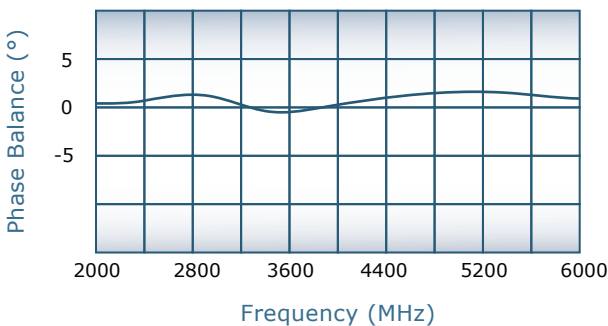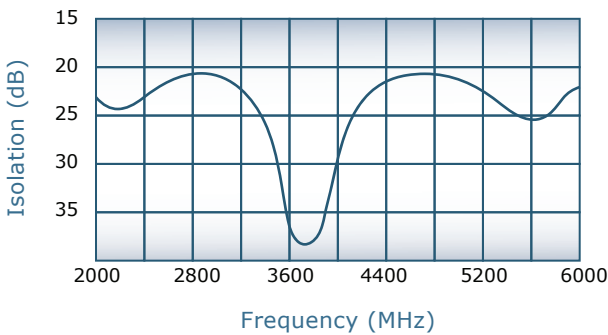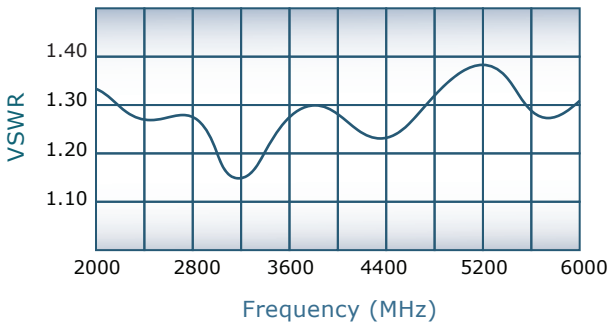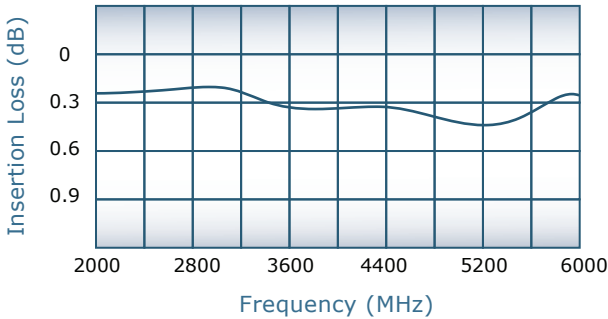

**Notes**

- All specifications guaranteed
- Operating Temperature: -55°C to +85°C
- Surface Mount Design
- Surface Finish: Immersion silver (RoHS Compliant)
- Ports J4 & J5 require a 50 ohm termination
- Hatched areas denotes no copper

**Port Configurations**

J1	J2, J3	J4, J5
Sum Port	Inputs/Outputs	Isolated Load Ports

