



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



180° Hybrid Combiner/Divider

Model H1484

Frequency:	2 - 32 MHz
Power:	500 W CW
Insertion Loss:	0.2 dB Max.
VSWR:	1.30:1 Max.
Isolation:	25 dB Min.
Phase Balance:	180° ± 3° Max.
Amplitude Balance:	0.1 dB Max.

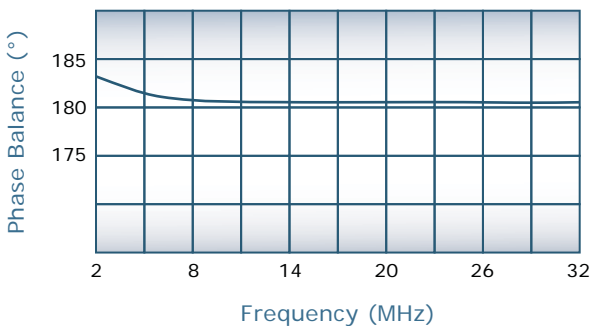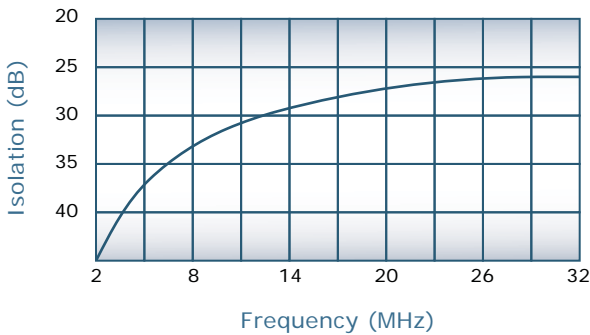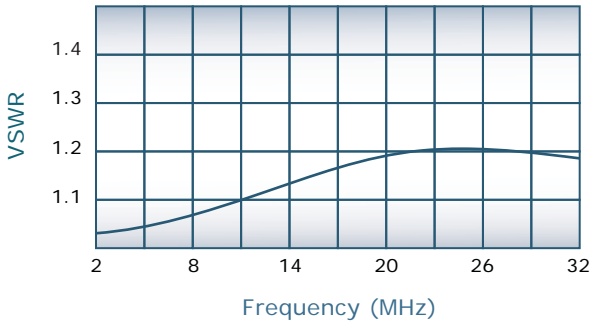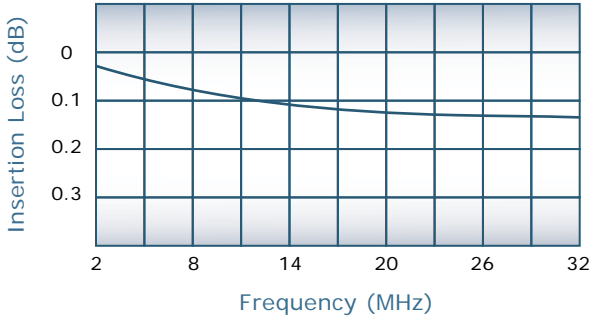

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +75°C
- Weight: 1.65 Pounds

Connector Configurations

Model	J1 (Sum Port)	J3, J4 (Inputs/Outputs)	J2(Diff Port)
H1484-10	N Female	N Female	N Female
H1484-12	N Female	SMA	SMA
H1484-13	N Female	BNC	BNC
H1484-102	SMA	SMA	SMA

