



**DECADES AHEAD<sup>®</sup>**  
**high power RF devices**





**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
 T (845) 278 2220      www.werlatone.com  
 F (845) 278 3440      sales@werlatone.com

**180° Hybrid Combiner/Divider**

**Model H5675**

Frequency:	0.1 - 250 MHz
Power:	100 W CW
Insertion Loss:	1.0 dB Max.
VSWR:	1.40: 1 Max.
Isolation:	18 dB Min.
Phase Balance:	180° ± 8° Max.
Amplitude Balance:	0.6 dB Max.

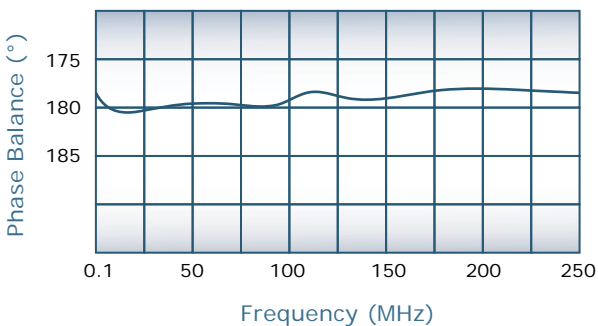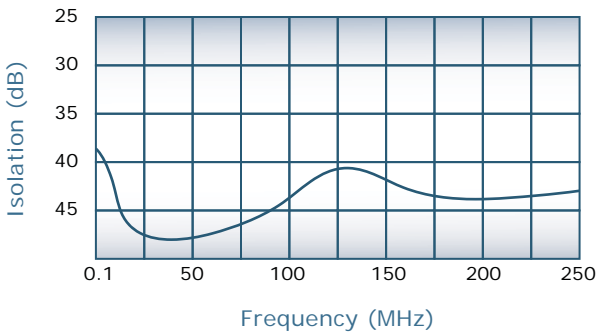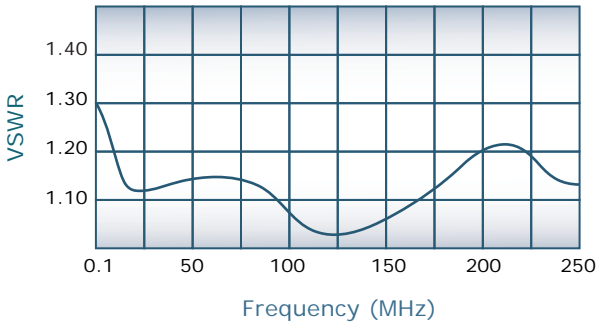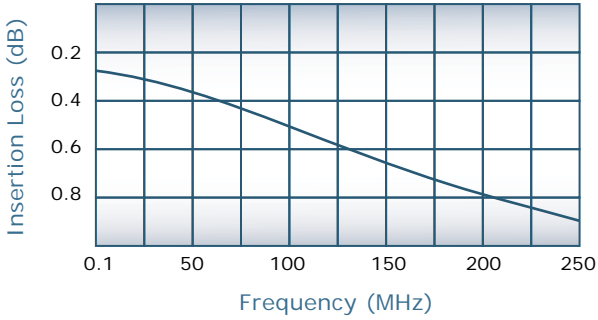


**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +75°C

**Connector Configurations**

Model	J1 (Sum Port)	J2,J3 (0°/180°)
H5675-10	N Female	N Female
H5675-12	N Female	SMA

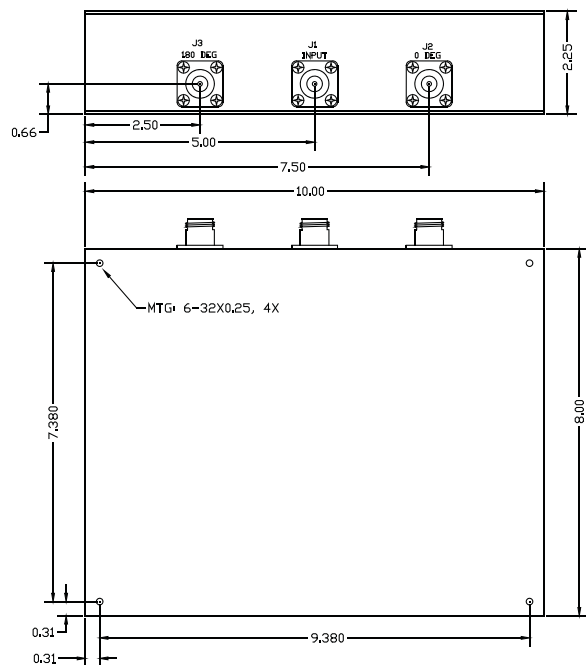

Specifications subject to change without notice



**Send Us Your Specs for Custom Designs**