



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



180° Hybrid Combiner/Divider

Model H6287

Frequency:	0.1 - 50 MHz
Power:	500 W CW
Insertion Loss:	0.5 dB Max.
VSWR:	1.30:1 Max.
Isolation:	30 dB Min.
Phase Balance:	180° ± 6° Max.
Amplitude Balance:	0.2 dB Max.

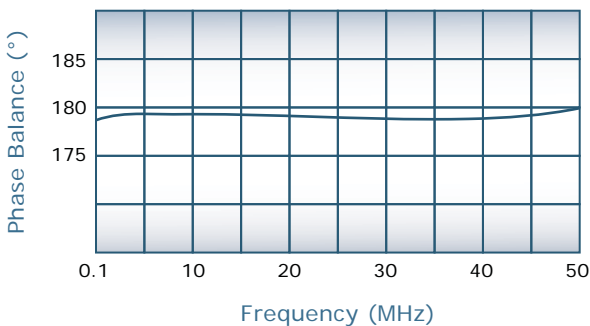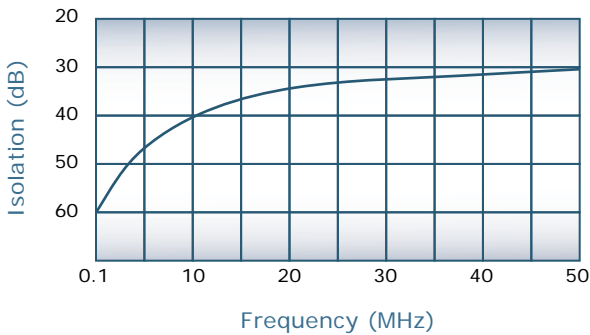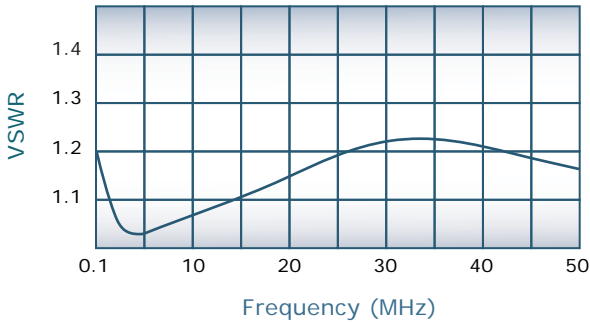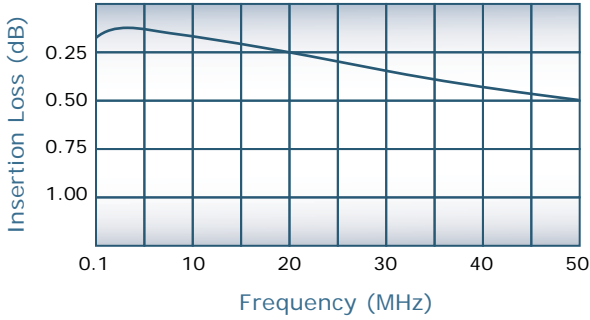

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J4 (Sum Port)	J2,J3 (Inputs/Outputs)	J1 (Diff Port)
H6287-10	N Female	N Female	N Female
H6287-12	N Female	SMA	SMA

