



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

180° Hybrid Combiner/Divider

Model H7521

Frequency:	200 - 400 MHz
Power:	2,500 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.30: 1 Max.
Isolation:	20 dB Min.
Phase Balance:	180° ± 5° Max.
Amplitude Balance:	0.5 dB Max.

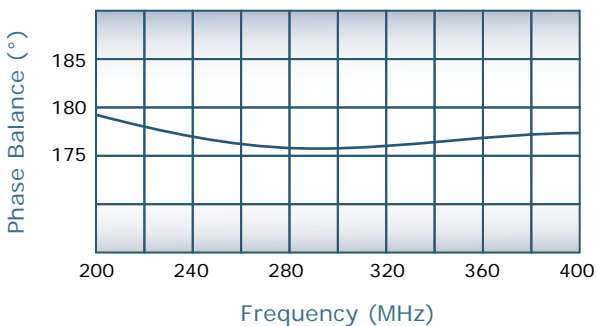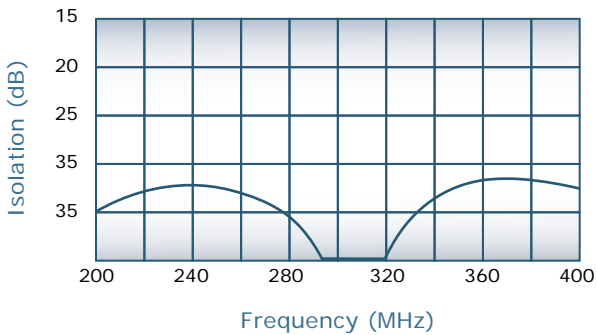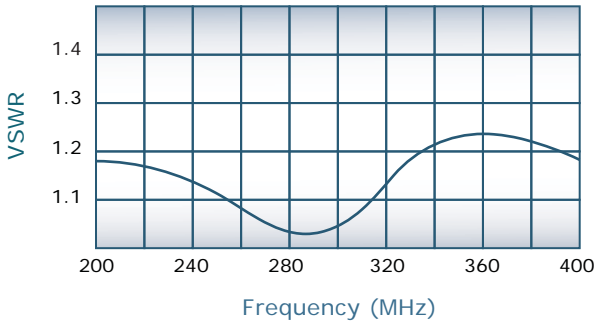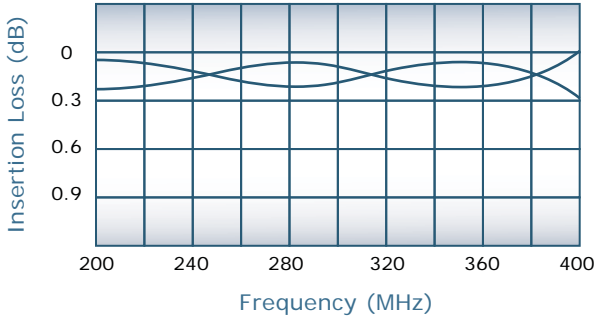


Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2 (Diff Port)	J3, J4 (Inputs/Outputs)
H7521-28	7/16 Female	7/16 Female	7/16 Female

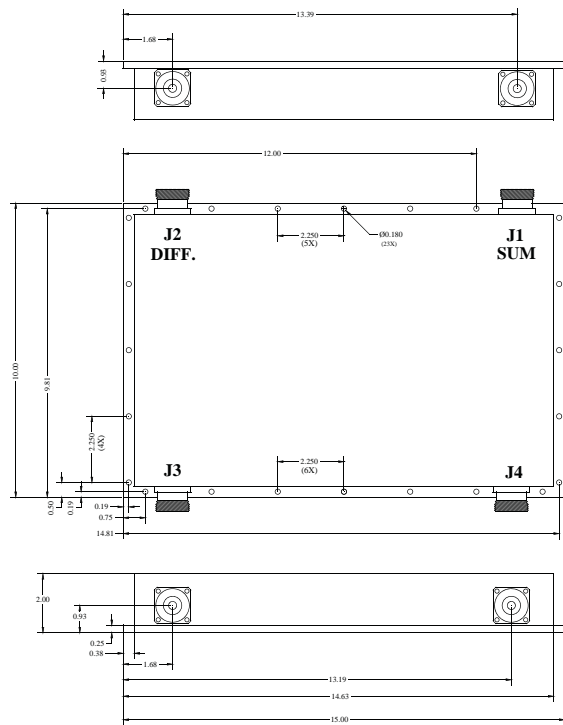

Specifications subject to change without notice



Send Us Your Specs for Custom Designs