



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



180° Hybrid Combiner/Divider
Model H9331

Frequency:	350 - 1000 MHz
Power:	150 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.30: 1 Max.
Isolation:	18 dB Min.
Phase Balance:	180° ± 7° Max.
Amplitude Balance:	0.4 dB Max.

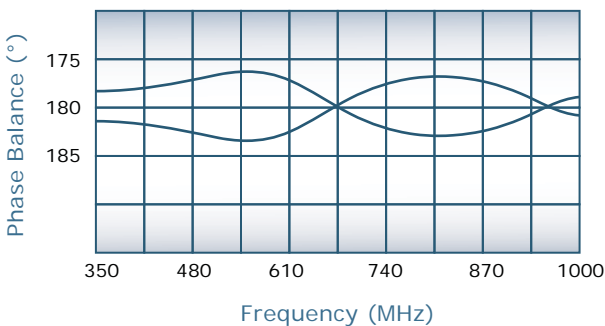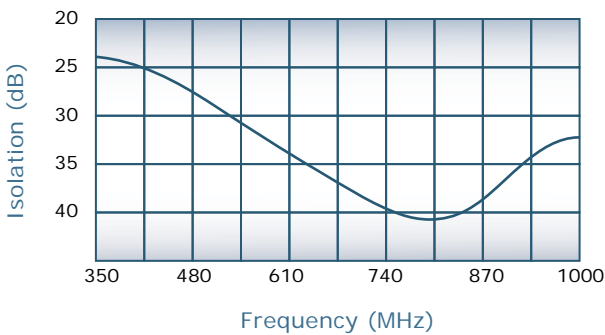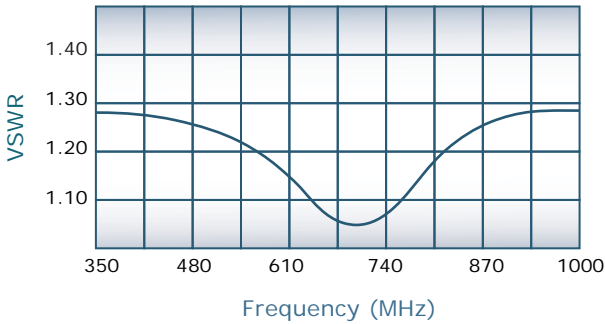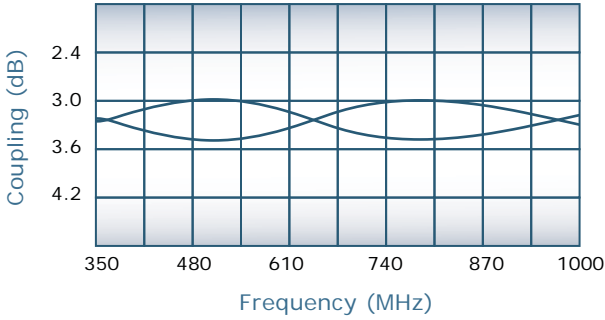

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Surface Mount Design
- Surface Finish: Immersion Silver (RoHS Compliant)
- Other Surface Finishes Available Upon Request
- Hatched Areas Denote Metallization
- Operating Temperature: -55°C to +75°C
- Connectorized version available, Model H9395

