



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

180° Hybrid Combiner/Divider

Model H9395

Frequency:	350 - 1000 MHz
Power:	250 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.30:1 Max.
Isolation:	20 dB Min.
Phase Balance:	180° ± 7° Max.
Amplitude Balance:	0.4 dB Max.

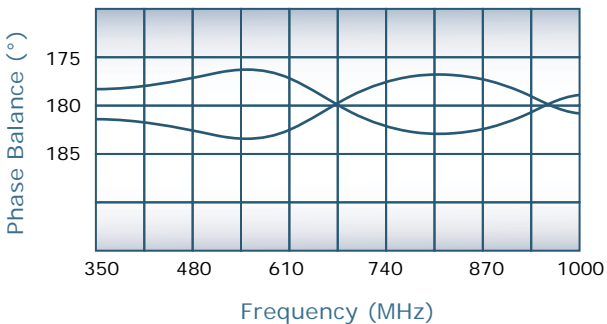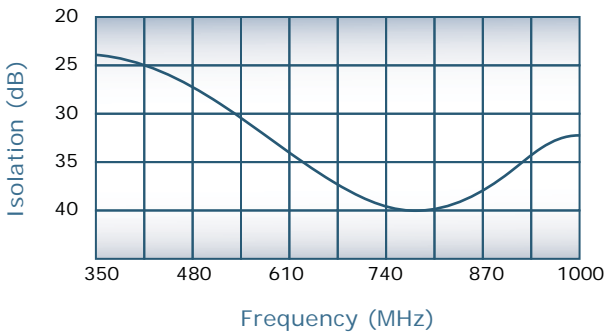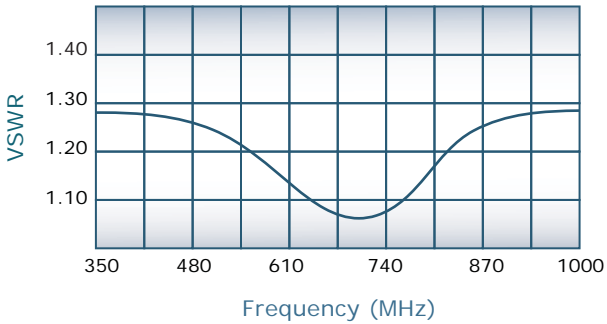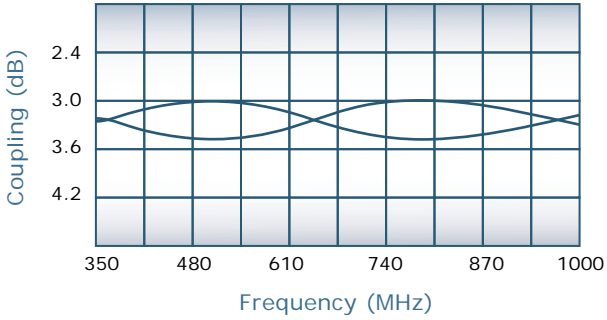

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +75°C
- Non-Connectorized version available, Model H9331

Connector Configurations

Model	J1 (Sum Port)	J2,J3 (Input/Output)	J4 (Diff Port)
H9395-10	N Female	N Female	N Female
H9395-12	N Female	SMA	SMA

