



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



90° Hybrid Coupler

Model QH3350

Frequency:	6 - 130 MHz
Power:	10 W CW
Insertion Loss:	0.6 dB Max.
VSWR:	1.30: 1 Max.
Isolation:	20 dB Min.
Phase Balance:	90° ± 5° Max.
Amplitude Balance:	± 0.3 dB Max.

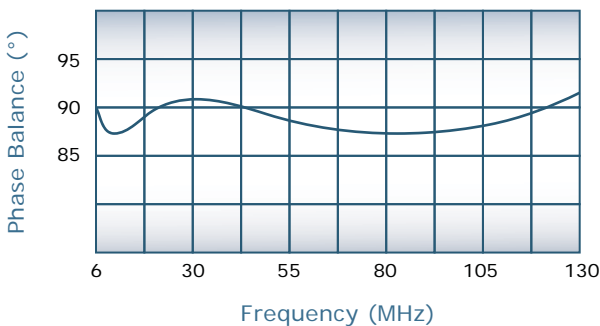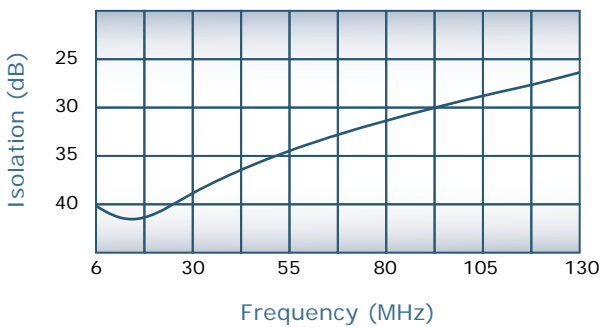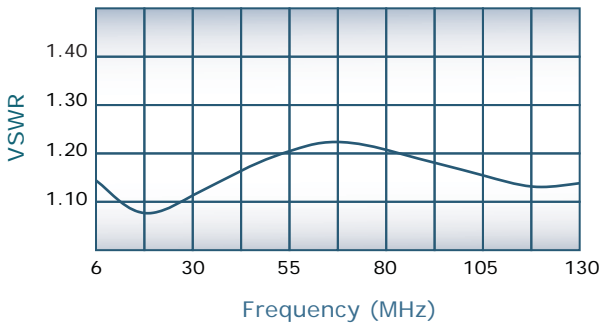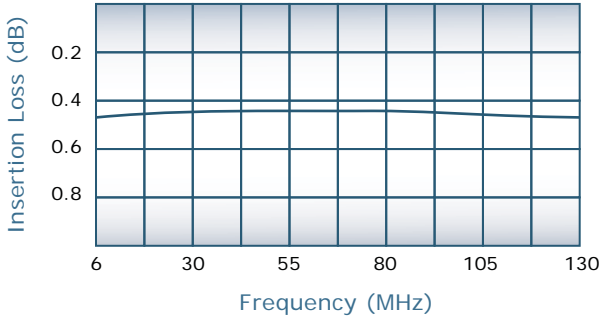

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Weight: 0.75 Pounds
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2 (90°)	J3 (0°)
QH3350-10	N Female	N Female	N Female
QH3350-12	N Female	SMA	SMA
QH3500-102	SMA	SMA	SMA

