


PRODUCT DATA SHEET
H10253

Werlatone® High Power 180° RF Hybrid Combiners/Dividers balance traditional technologies with disruptive microwave techniques. The outcome is a microwave component which provides an order of magnitude improvement over current capabilities. Our newest line of high power, patented 180° RF Hybrid Combiners/Dividers provides an incredible 5:1 bandwidth, while exhibiting exceptionally low loss and superior port-to-port isolation.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency: 1000 - 3000 MHz
 Power: 350 W CW
 Insertion Loss: 0.55 dB Max.
 VSWR: 1.40:1 Max.
 Phase Balance: 180° ± 7° Max.
 Amplitude Balance: ± 0.3 dB Max.
 Isolation: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (RoHS Compliant)
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Size: 4.4 x 2.6 x 1.16"


Connector Configurations:

Model	Diff. Port (J1)	Inputs/Outputs (J2, J3)	Sum Ports (J4)
H10253-10	N Female	N Female	N Female

Werlatone's standard line of High Power 180° RF Hybrid Combiners/Dividers covers multiple octaves within a microwave device. Low frequency 180° Hybrid Combiner/Dividers employ proprietary ferrite transmission line techniques, similar to our 0° Combiners/Dividers. Insertion loss in both sum and difference ports is minimal, allowing the hybrid to handle high power over its frequency range. Custom requirements are welcome.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




PRODUCT DATA SHEET


H10253

Performance Data (Specifications subject to change without notice):


Coupling:

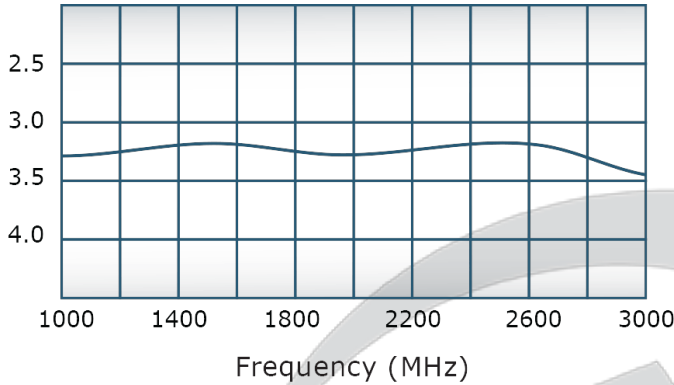


VSWR:

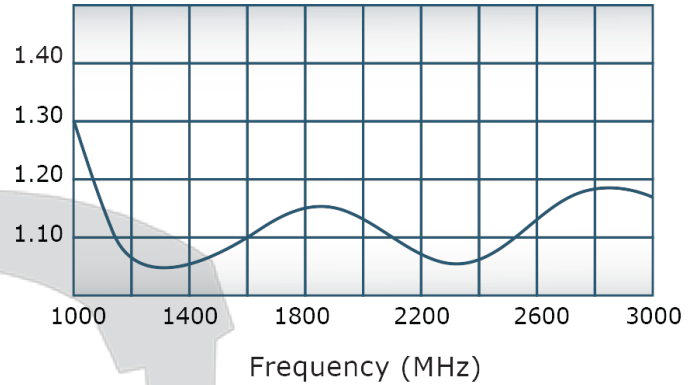

Insertion Loss:

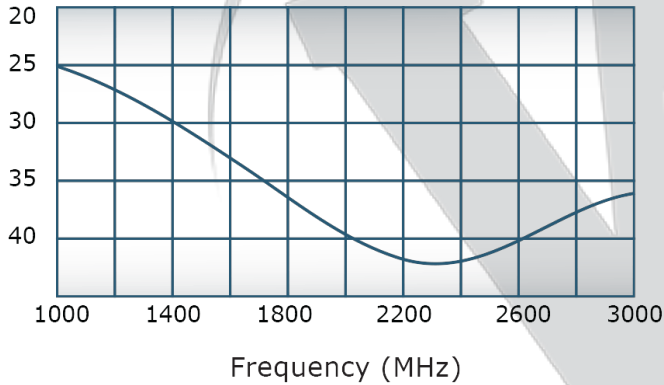


Phase Balance:

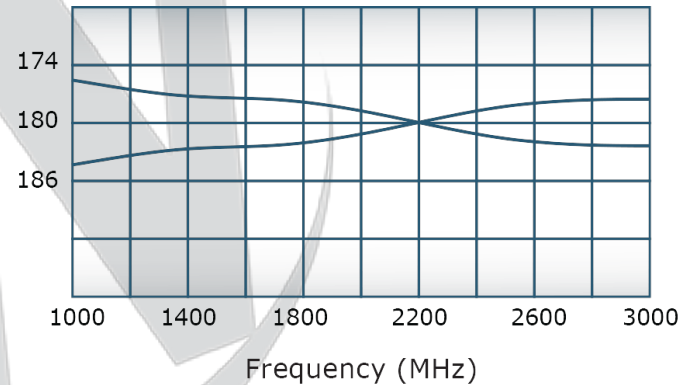

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

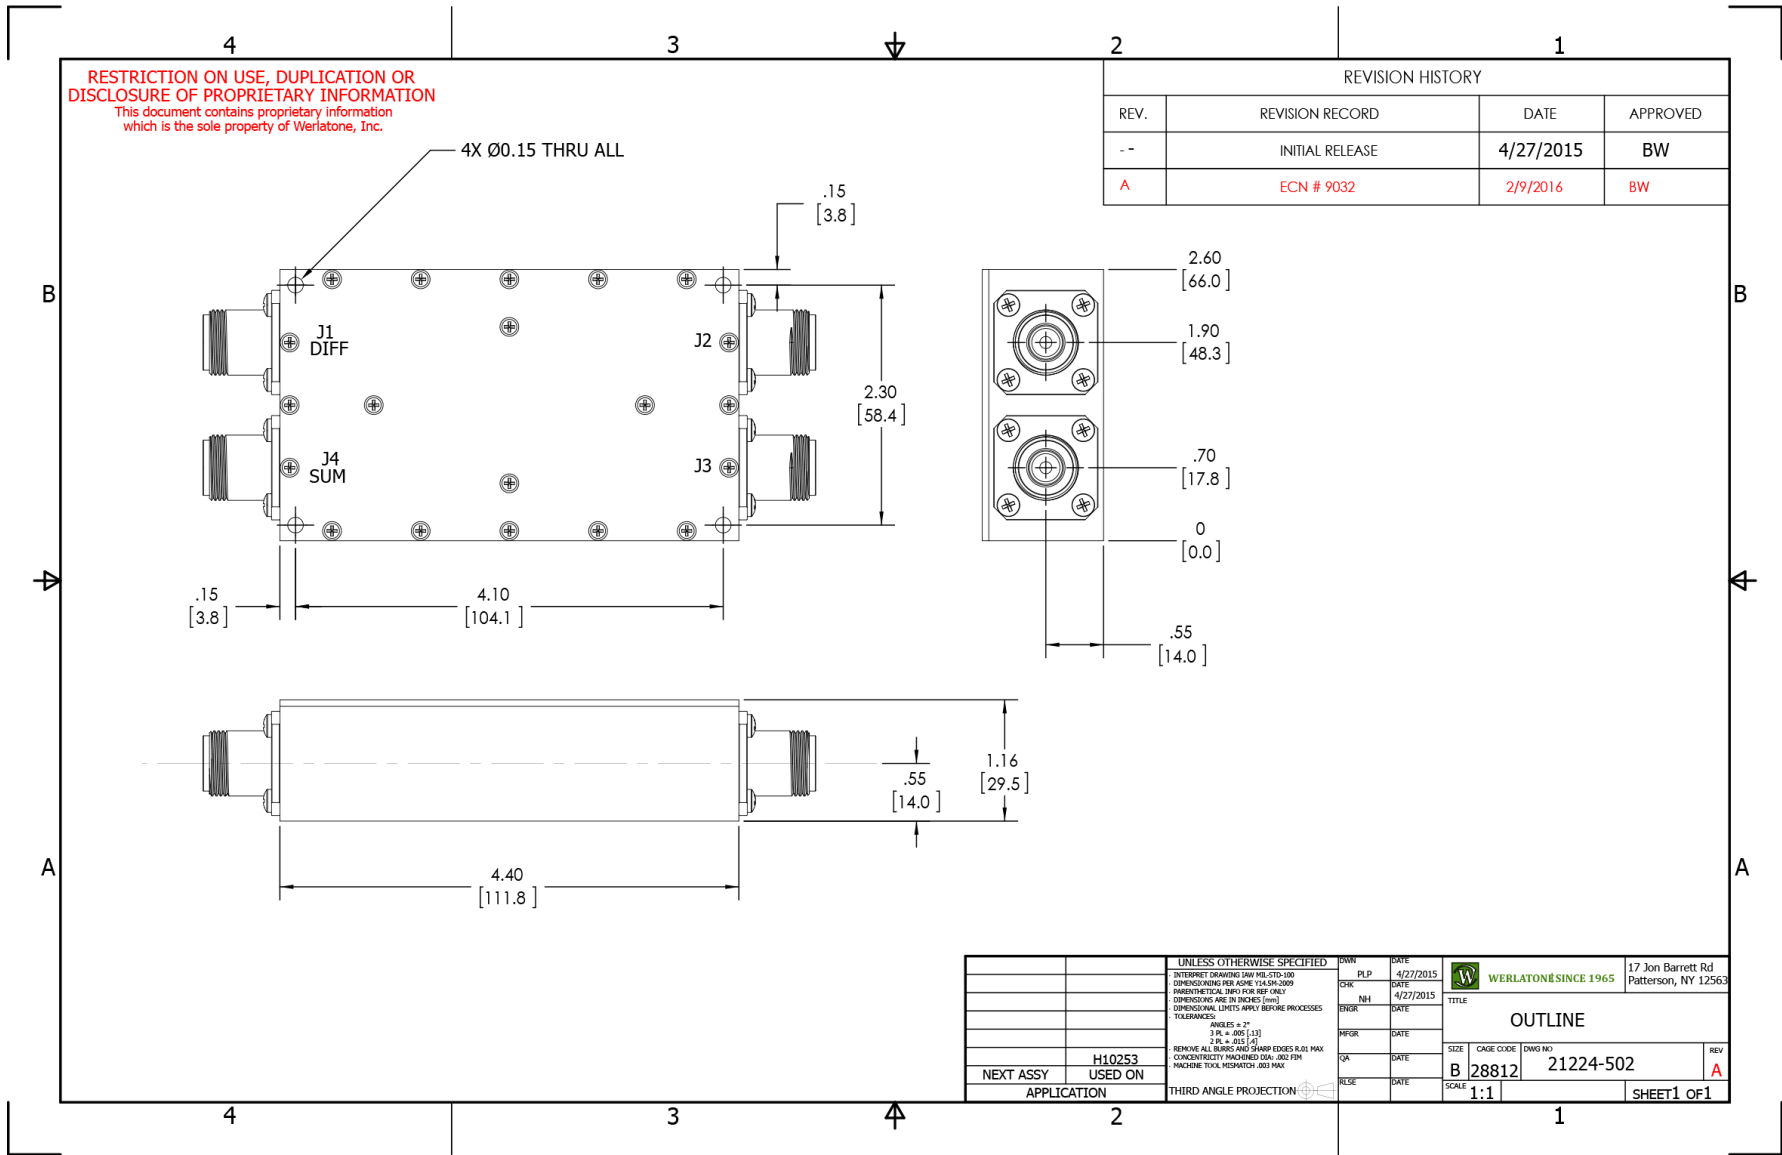

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
--	INITIAL RELEASE	4/27/2015	BW
A	ECN # 9032	2/9/2016	BW

UNLESS OTHERWISE SPECIFIED		OWN	DATE	WERLATONE SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563
INTERPRET DRAWING PER MIL-STD-100		PLP	4/27/2015	
DIMENSIONING PER ASME Y14.5M-2009		CHK	DATE	TITLE
DIMENSIONAL UNITS ARE IN INCHES (mm)		NH	4/27/2015	
DIMENSIONAL UNITS APPLY BEFORE PROCESSES		ENGR	DATE	SIZE CAGE CODE DWG NO B 28812 21224-502
TOLERANCES:		MPGR	DATE	
ANGLES = 3°		QA	DATE	SCALE 1:1
3 RL ± .006 [13]		RELE	DATE	
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX		APPLICATION		REV
CONCENTRICITY FRACTURED DIA. .002 FPM		NEXT ASSY USED ON		A
MACHINE TOOL MISMATCH .003 MAX		THIRD ANGLE PROJECTION		REV
		SHEET 1 OF 1		

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com