


PRODUCT DATA SHEET
H5817

Werlatone® High Power 180° RF Hybrid Combiners/Dividers balance traditional technologies with disruptive microwave techniques. The outcome is a microwave component which provides an order of magnitude improvement over current capabilities. Our newest line of high power, patented 180° RF Hybrid Combiners/Dividers provides an incredible 5:1 bandwidth, while exhibiting exceptionally low loss and superior port-to-port isolation.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency: 470 - 860 MHz
 Power: 1200 W CW
 Insertion Loss: 0.2 dB Max.
 VSWR: 1.50:1 Max.
 Phase Balance: 180° ± 3° Max.
 Amplitude Balance: ± 0.1 dB Max.
 Isolation: 18 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Size: 2.0 x 5.0 x 1.88"

Connector Configurations:

Model	Sum Port (J1)	Inputs/Outputs (J2,J3)	Isolated Load Port (J4)
H5817-10	N Female	N Female	N Female
H5817-12	N Female	SMA	SMA

Werlatone's standard line of High Power 180° RF Hybrid Combiners/Dividers covers multiple octaves within a microwave device. Low frequency 180° Hybrid Combiner/Dividers employ proprietary ferrite transmission line techniques, similar to our 0° Combiners/Dividers. Insertion loss in both sum and difference ports is minimal, allowing the hybrid to handle high power over its frequency range. Custom requirements are welcome.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/25/2019	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:**
J1-J4: N FEMALE
J4: ISOLATED PORT (EXTERNAL LOAD REQUIRED)

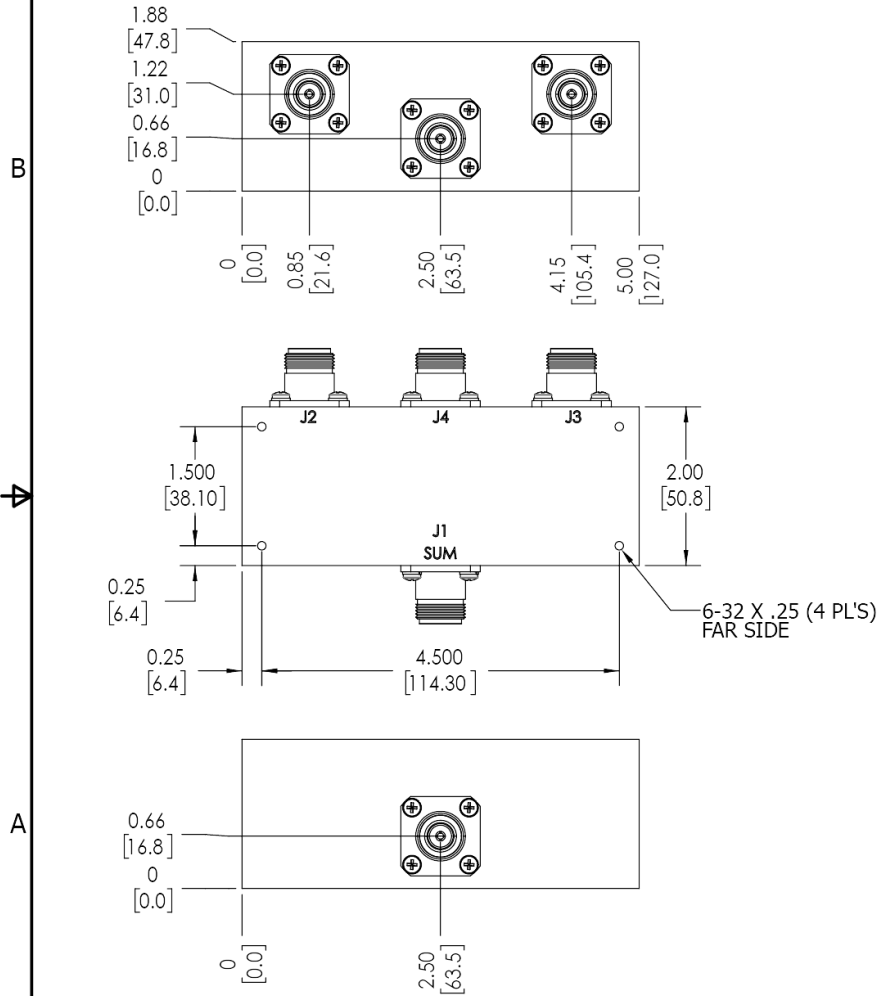

UNLESS OTHERWISE SPECIFIED		OWN	DATE	WERLATONE SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563
INTERPRET DRAWING IAW MIL-STD-100	SD	11/25/2019	CHK	
DIMENSIONS PER ASME Y14.5M-2009	CS	11/25/2019	ENGR	TITLE
PARENTHETICAL INFO FOR REF ONLY	DATE			OUTLINE
DIMENSIONS ARE IN INCHES	DATE			SIZE
DIMENSIONAL LIMITS APPLY BEFORE PROCESSES	DATE			CAGE CODE
TOLERANCES:	DATE			DWG NO
ANGLES = 2°	DATE			REV
3 PL ± .005 (.13)	DATE			A
2 PL ± .015 (.38)	DATE			
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX	DATE			
CONCENTRICITY MACHINED DIA: .002 FIM	DATE			
MACHINE TOOL MISMATCH .003 MAX	DATE			
NEXT ASSY	USED ON	SCALE		
APPLICATION	THIRD ANGLE PROJECTION	1:1.5		

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com