
PRODUCT DATA SHEET
H10125

Werlatone® High Power 180° RF Hybrid Combiners/Dividers balance traditional technologies with disruptive microwave techniques. The outcome is a microwave component which provides an order of magnitude improvement over current capabilities. Our newest line of high power, patented 180° RF Hybrid Combiners/Dividers provides an incredible 5:1 bandwidth, while exhibiting exceptionally low loss and superior port-to-port isolation.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency:	1000 - 3000 MHz
Power:	350 W CW
Insertion Loss:	0.5 dB Max.
VSWR:	1.35:1 Max.
Phase Balance:	180° ± 7° Max.
Amplitude Balance:	± 0.3 dB Max.
Isolation:	20 dB Min.

Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type II Class 3 (RoHS Compliant)
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Size:	2.31 x 1.21 x 0.25"


Port Configurations:

Model	J1	J4	J2 & J3
H10125-Ag	Difference Port	Sum Port	Input Ports

Werlatone's standard line of High Power 180° RF Hybrid Combiners/Dividers covers multiple octaves within a microwave device. Low frequency 180° Hybrid Combiner/Dividers employ proprietary ferrite transmission line techniques, similar to our 0° Combiners/Dividers. Insertion loss in both sum and difference ports is minimal, allowing the hybrid to handle high power over its frequency range. Custom requirements are welcome.


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




Performance Data (Specifications subject to change without notice):


Coupling:

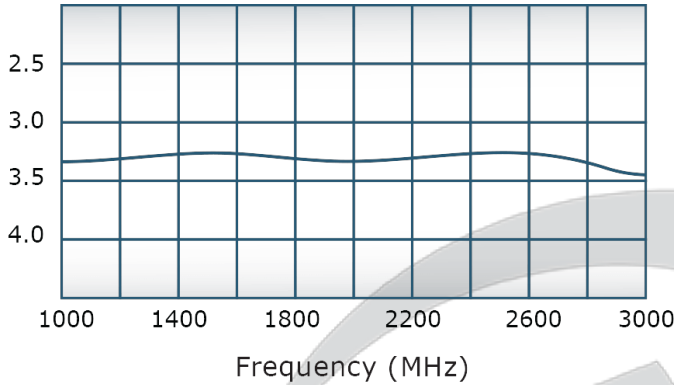


VSWR:

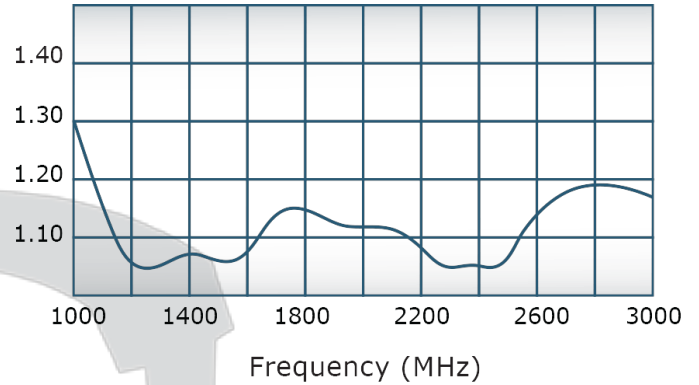

Isolation:

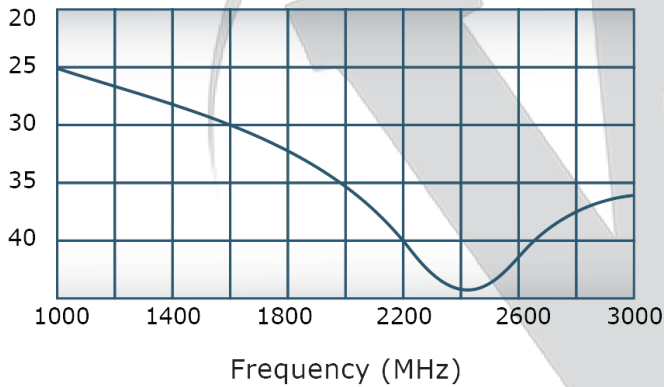

Phase Balance:



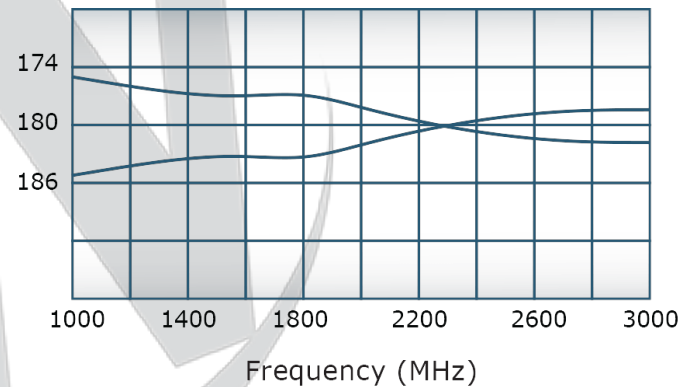


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

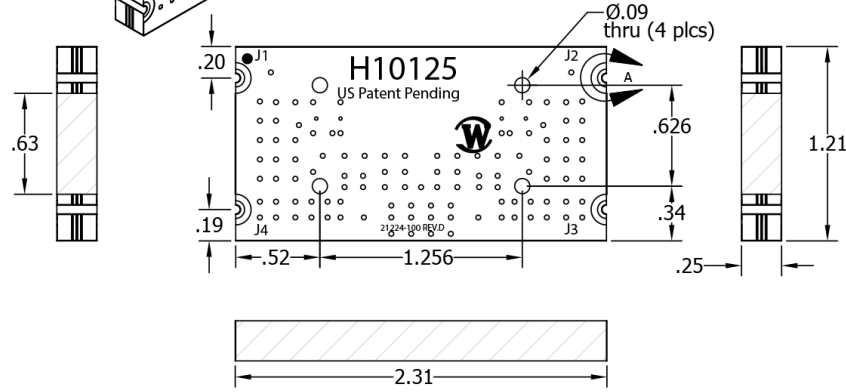

REVISION HISTORY			
REV	REVISION RECORD	DATE	APPROVED
-	Initial Rls	8/21/2014	BW
A	ECN # 9030	2/9/2016	BW

ELECTRICAL SPECIFICATIONS

(180 deg Hybrid Combiner / Divider)

Frequency: 1000 - 3000 MHz
 Power: 350 Watts CW
 Insertion Loss: 0.50 dB Max.; 0.4 dB typ.
 Amplitude Balance: ± 0.2 dB Max.
 Phase Balance: ± 7° Max.
 VSWR: 1.35:1
 Isolation: 20 dB Min.
 Operating Temperature: -55°C To +85°C

21224-100	H10125
NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED
 • INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100
 • DIMENSIONING PER ASME Y14.5M-2009
 • PARENTHESES FOR REF ONLY
 • DIMENSIONS ARE IN INCHES
 • DIMENSIONAL LIMITS APPLY BEFORE PROCESSES
 • TOLERANCES: ANGLES ± 2°
 3 PL ± .005
 2 PL ± .015

DWN	DATE	WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563
NH	08/21/14		
CHK	DATE	TITLE	
BW	08/21/14	Outline	
ENGR	DATE	SIZE	CAGE CODE
NH	08/21/14	A	28812
MFGR	DATE	DWG NO	REV
QA	DATE	21224-500	A
RLSE	DATE	SCALE	SHEET 1 OF 1
		1:1	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com