

PRODUCT DATA SHEET

H10126

Werlatone® High Power 180° RF Hybrid Combiners/Dividers balance traditional technologies with disruptive microwave techniques. The outcome is a microwave component which provides an order of magnitude improvement over current capabilities. Our newest line of high power, patented 180° RF Hybrid Combiners/Dividers provides an incredible 5:1 bandwidth, while exhibiting exceptionally low loss and superior port-to-port isolation.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency: 2000 - 6000 MHz
 Power: 100 W CW
 Insertion Loss: 0.8 dB Max.
 VSWR: 1.35:1 Max.
 Phase Balance: 180° ± 7° Max.
 Amplitude Balance: ± 0.4 dB Max.
 Isolation: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type II Class 3 (RoHS Compliant)
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Size: 1.15 x 0.6 x 0.14"


Port Configurations:

Model	J1	J2, J3	J4
H10126	Difference Port	Input Ports	Sum Port

Werlatone's standard line of High Power 180° RF Hybrid Combiners/Dividers covers multiple octaves within a microwave device. Low frequency 180° Hybrid Combiner/Dividers employ proprietary ferrite transmission line techniques, similar to our 0° Combiners/Dividers. Insertion loss in both sum and difference ports is minimal, allowing the hybrid to handle high power over its frequency range. Custom requirements are welcome.


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




Performance Data (Specifications subject to change without notice):


Coupling:

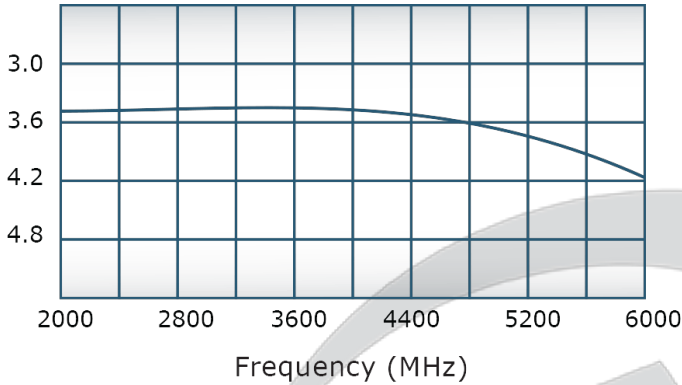


VSWR:

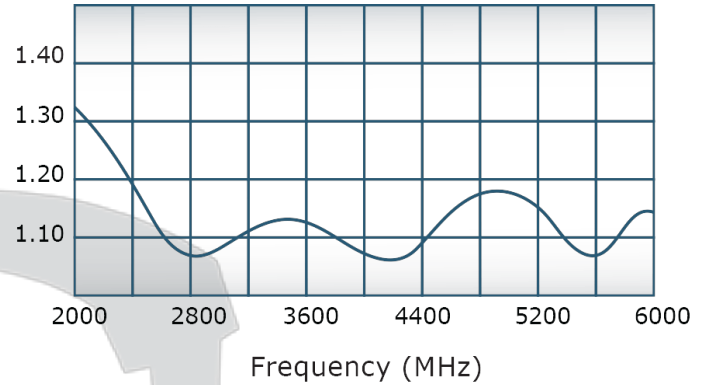

Isolation:

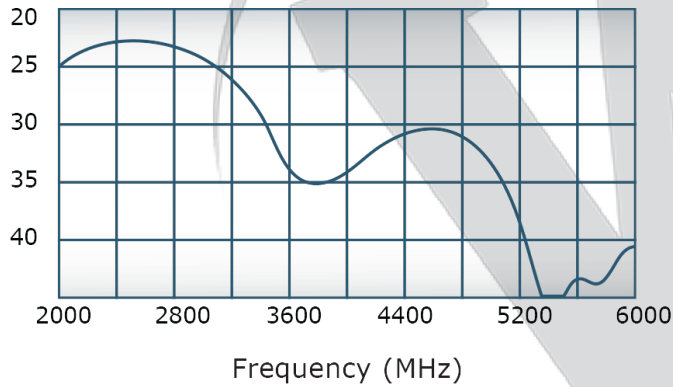

Phase Balance:

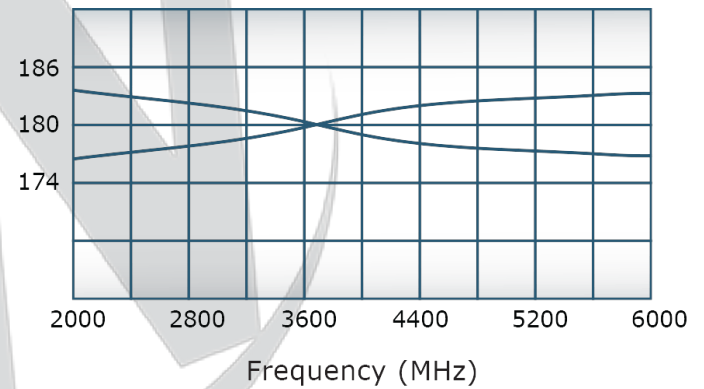


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of



Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.



REVISION HISTORY			
REV	REVISION RECORD	DATE	APPROVED
-	Initial Rls	10/22/2014	BW
A	ECN 9029	2/9/2016	BW

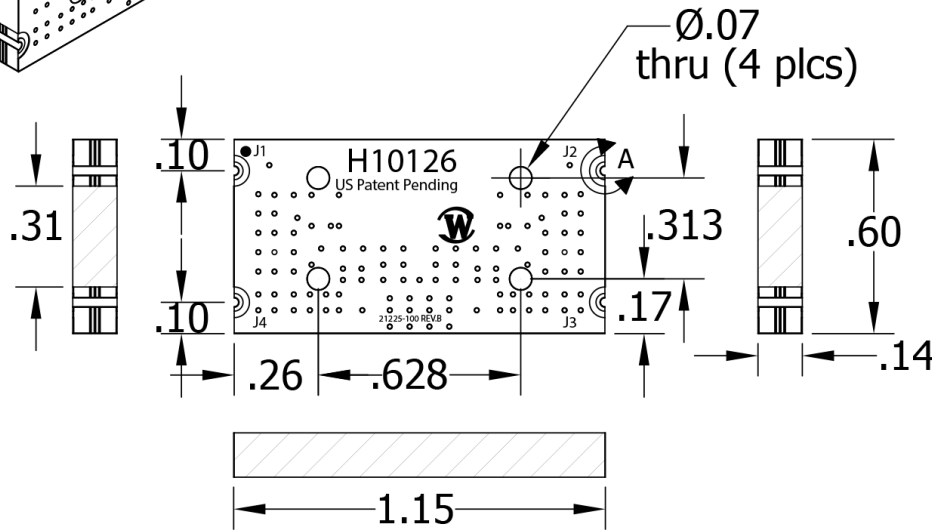

21225-100	H10126
NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED
 • INTERPRET DRAWING LAW MIL-STD-100
 • DIMENSIONING PER ASME Y14.5M-2009
 • PARENTHESES FOR REF ONLY
 • DIMENSIONS ARE IN INCHES
 • DIMENSIONAL LIMITS APPLY BEFORE PROCESSES
 • TOLERANCES: ANGLES ± 2°
 3 PL ± .005
 2 PL ± .015

THIRD ANGLE PROJECTION

DWN	DATE	WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563	
NH	10/22/14			
CHK	DATE	TITLE		
BW	10/22/14	Outline		
ENGR	DATE	SIZE	CAGE CODE	DWG NO
NH	10/22/14	A	28812	21225-500
MFGR	DATE	SCALE	REV	
QA	DATE	2:1	A	
RLSE	DATE	SHEET 1 OF 1		

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com