



PRODUCT DATA SHEET

QH3571

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Connectorized Drop-In & Surface Mount

Electrical Specifications:

Frequency: 200 - 500 MHz
 Power: 1000 W CW
 Insertion Loss: 0.2 dB Max.
 VSWR: 1.30:1 Max.
 Phase Balance: 90° ± 3° Max.
 Amplitude Balance: ± 0.8 dB Max.
 Isolation: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Weight: 1.75 lbs.
 Size: 8.0 x 2.0 x 1.18"

Connector Configurations:

| Model | Sum Port (J1) | 0°, 90° (J2,J3) | Isolated Load Port (J4) |
|-----------|---------------|-----------------|-------------------------|
| QH9044-10 | N Female | N Female | N Female |

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




PRODUCT DATA SHEET


QH3571

Performance Data (Specifications subject to change without notice):


Coupling:

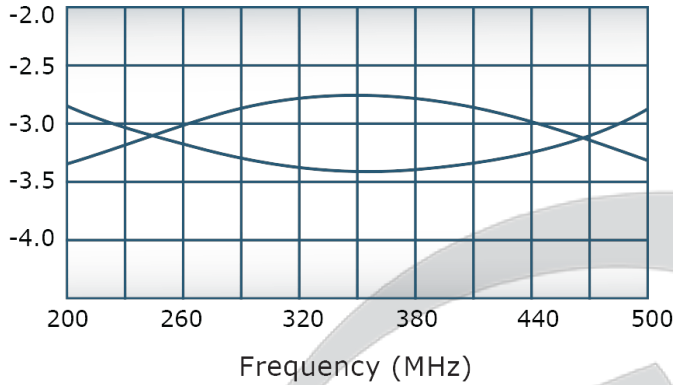


VSWR:

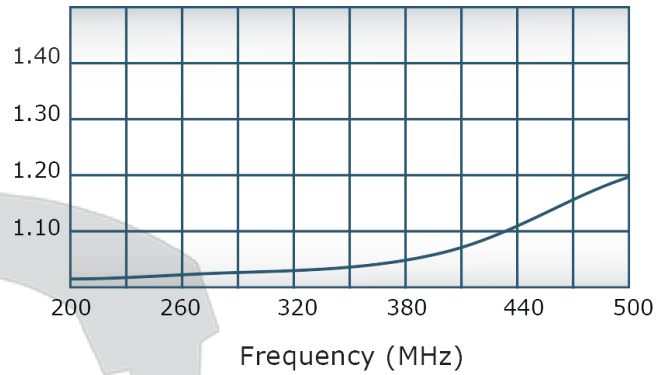

Insertion Loss:

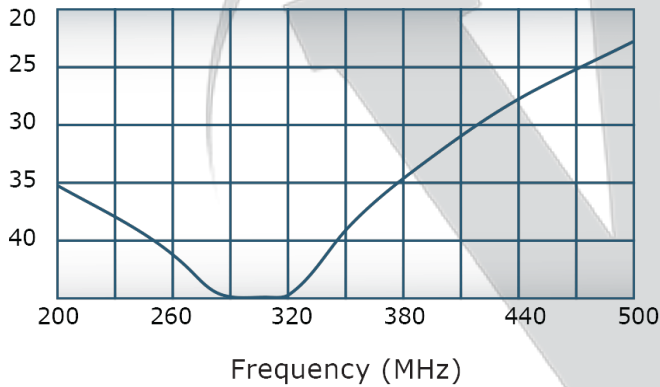


Phase Balance:

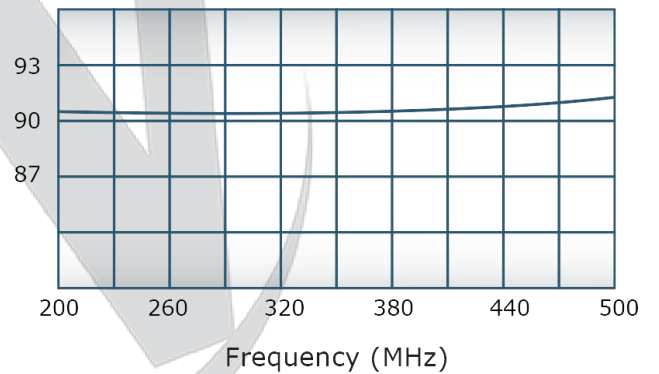

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

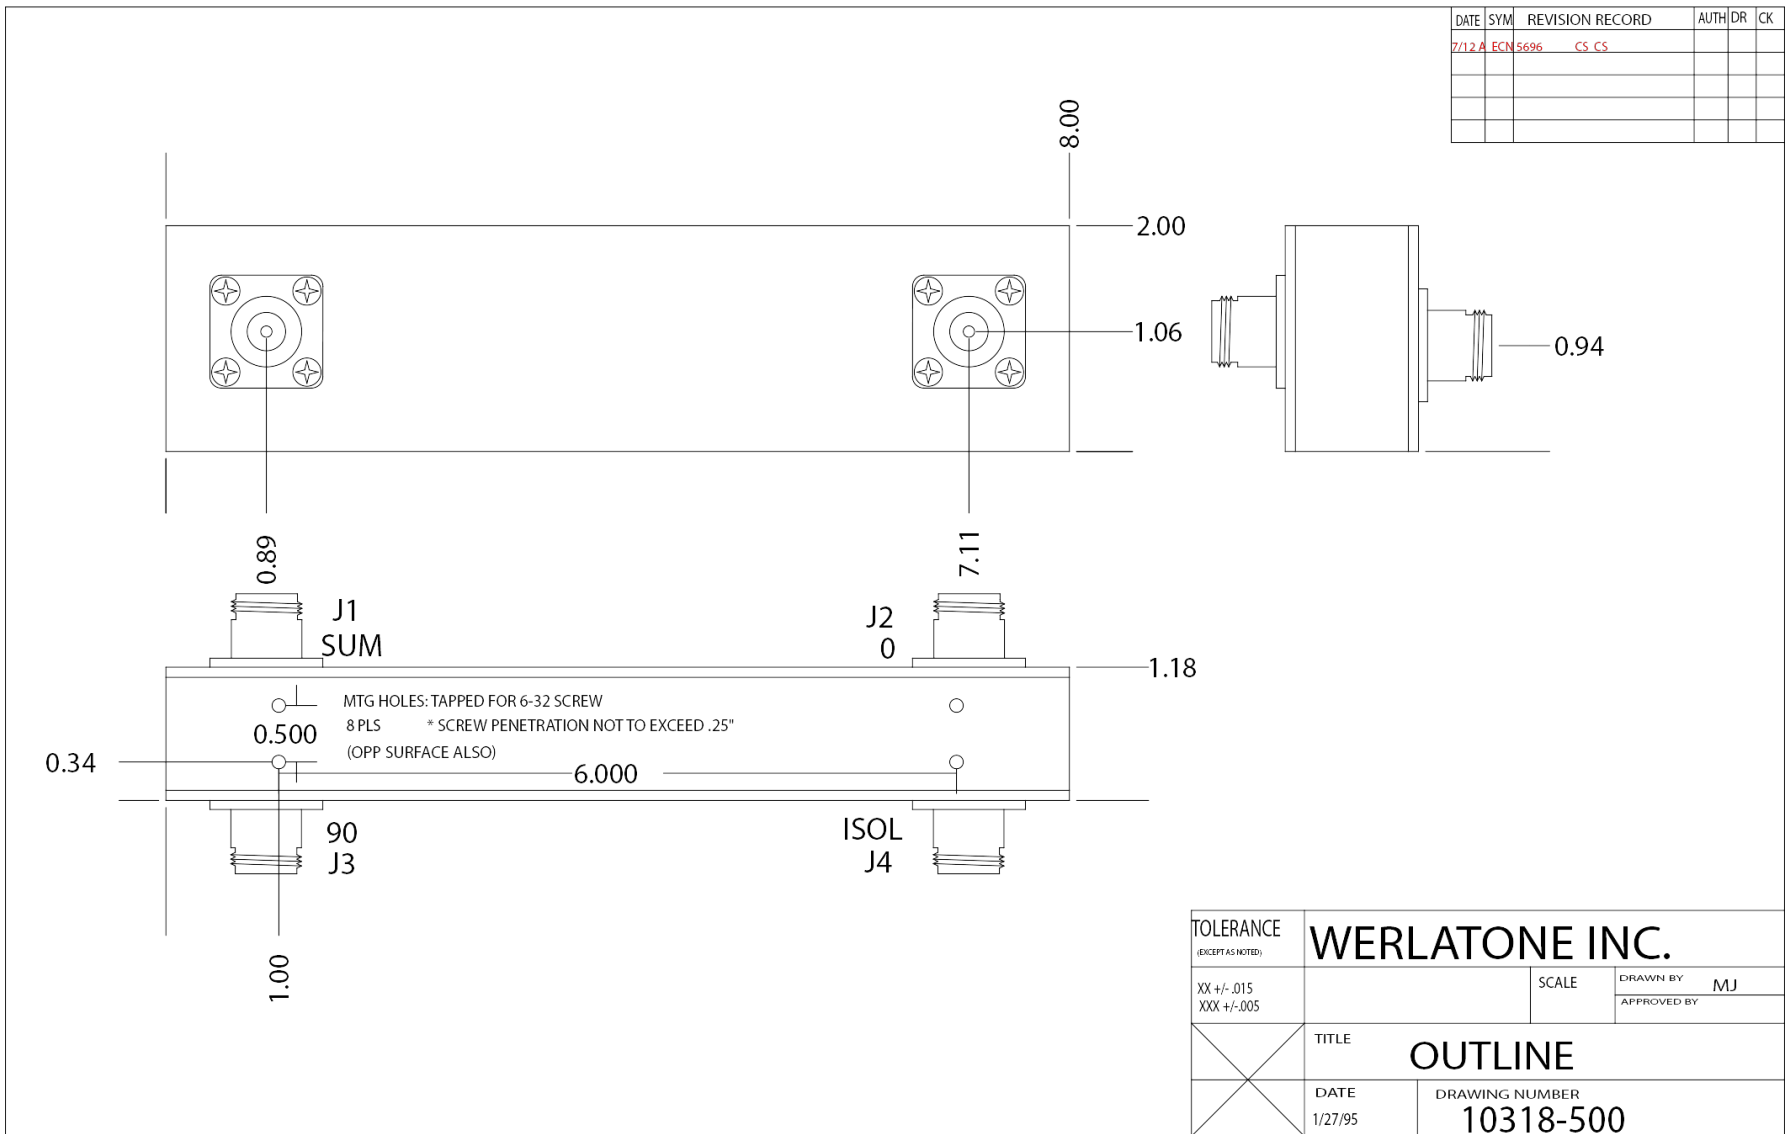

| DATE | SYM | REVISION RECORD | AUTH | DR | CK |
|------|-----|-----------------|------|----|----|
| 7/12 | A | ECN 5696 CS CS | | | |
| | | | | | |
| | | | | | |
| | | | | | |

| | | |
|---|-------------------------|------------------------------------|
| TOLERANCE (EXCEPT AS NOTED) XX +/- .015 XXX +/- .005 | WERLATONE INC. | |
| | SCALE | DRAWN BY MJ APPROVED BY |
| X | TITLE OUTLINE | |
| | DATE 1/27/95 | DRAWING NUMBER 10318-500 |

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com