WERLATONE

Model QH7774
90° Hybrids Connectorized



PRODUCT DATA SHEET **QH7774**

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power | Wide Bandwidths | Small Size | Connectorized | Drop-In & Surface Mount

Electrical Specifications:

Frequency:	100 - 1000 MHz
Power:	50 W CW
Insertion Loss:	0.6 dB Max.
VSWR:	1.30:1 Max.
Phase Balance:	90° ± 5° Max.
Amplitude Balance:	± 1.0 dB Max.
Isolation:	20 dB Min.

Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Weight:	1 lb.
Size:	5.1 x 2.1 x 1.1''

Connector Configurations:

Model	Sum Port (J1)	Inputs (J2,J3)	Ext. Load Port
QH7774-10	N Female	N Female	N Female
QH7774-12	N Female	SMA	SMA
QH7774-102	SMA	SMA	SMA

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

Werlatone, Inc.All Rights Reserved

WERLATONE


Model QH7774
90° Hybrids Connectorized




PRODUCT DATA SHEET **QH7774**

Performance Data (Specifications subject to change without notice):


Coupling:

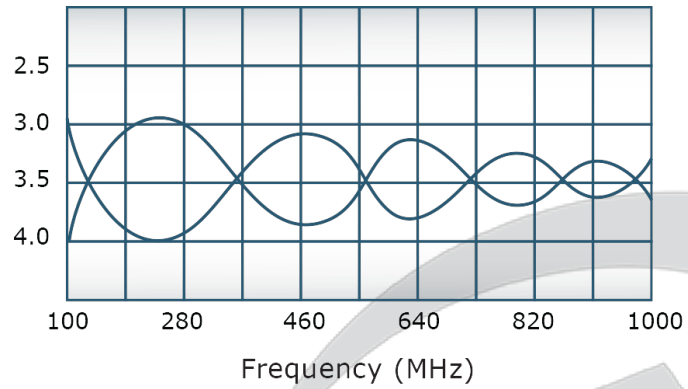


VSWR:

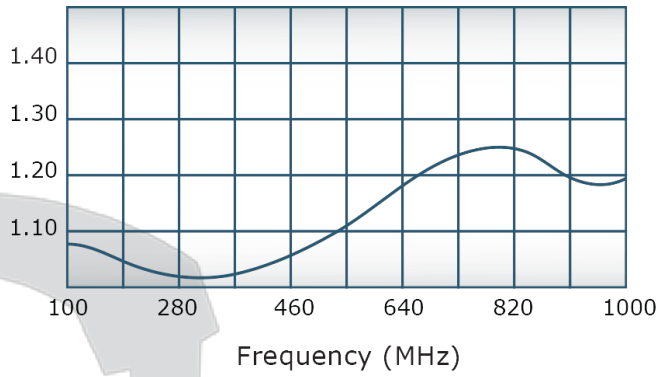

Isolation:

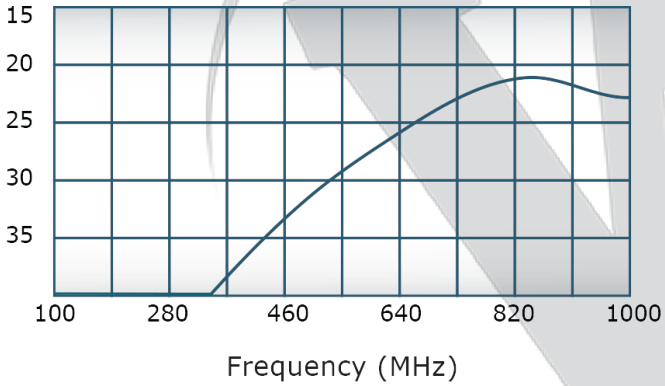


Phase Balance:

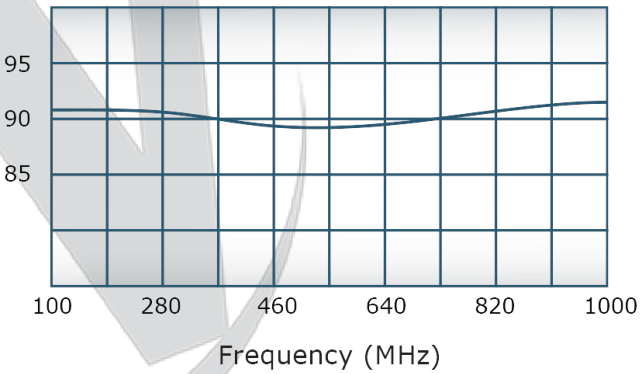

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOUSRE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV	REVISION RECORD	DATE	APPROVED
-	INITIAL RLS	6/14/2016	CS

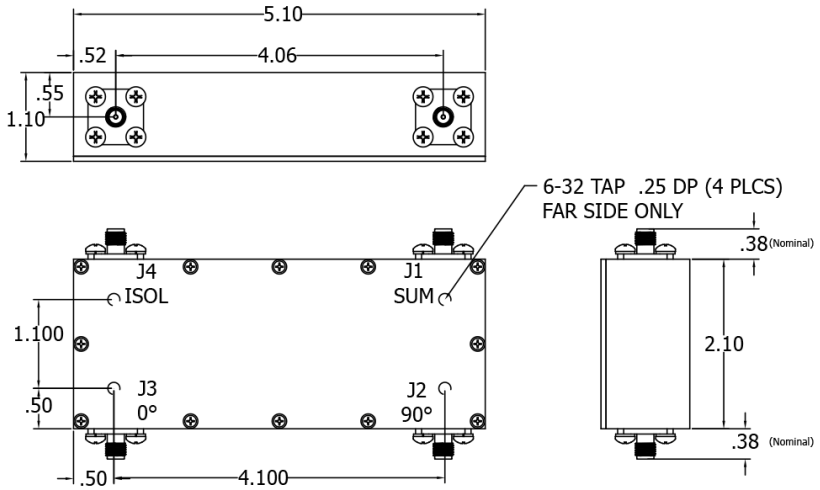

20214-300	QH7774-102
NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED
- INTERPRET DRAWING IAW MIL-STD-100
- DIMENSIONING PER ASME Y14.5M-2009
- PARENTHETICAL INFO FOR REF ONLY
- DIMENSIONS ARE IN INCHES
- DIMENSIONAL LIMITS APPLY BEFORE PROCESSES
- TOLERANCES: ANGLES ± 2-
  3 PL ± .005
  2 PL ± .015

THIRD ANGLE PROJECTION

DWN	NH	DATE 06/14/16
CHK	CS	DATE 06/14/16
ENGR	BW	DATE 06/14/16
MFGR		DATE
QA		DATE
RLSE		DATE

WERLATONE | SINCE 1965
17 Jon Barrett Rd
Patterson, NY 12563

TITLE
Outline

SIZE	CAGE CODE	DWG NO	REV
A	28812	20214-501	-

SCALE 1:2 SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com