



## PRODUCT DATA SHEET

QH8756

### Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

### Features:

High Power      Wide Bandwidths      Small Size      Connectorized      Drop-In & Surface Mount

### Electrical Specifications:

Frequency: 100 - 500 MHz  
 Power: 2000 W CW  
 Insertion Loss: 0.35 dB Max.  
 VSWR: 1.30:1 Max.  
 Phase Balance: 90° ± 3° Max.  
 Amplitude Balance: ± 0.6 dB Max.  
 Isolation: 18 dB Min.

### Mechanical Specifications:

Type: Connectorized  
 Material: Aluminum 6061-T6  
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available  
 Operating Temperature: -55°C to +75°C  
 Storage Temperature: -60°C to +85°C  
 Weight: 7 lbs.  
 Size: 21.8 x 2.2 x 2.0"

### Connector Configurations:


Model	Sum Port (J1)	0°, 90° (J2,J3)	Iso. Load Port
QH8756-41	SC Female	N Female	N Female
QH8756-650	SC Female	SC Female	N Female

**Werlatone's** breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




PRODUCT DATA SHEET


QH8756

**Performance Data (Specifications subject to change without notice):**


Coupling:

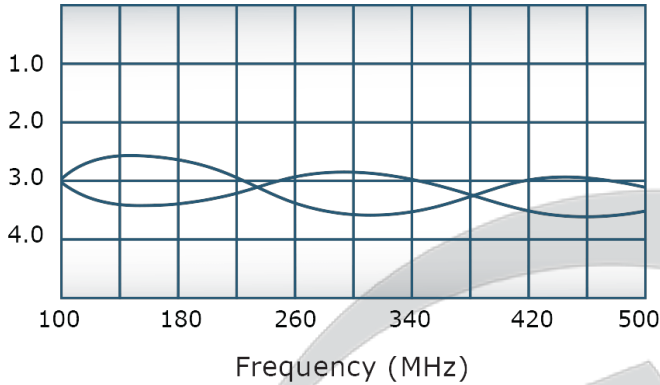


VSWR:

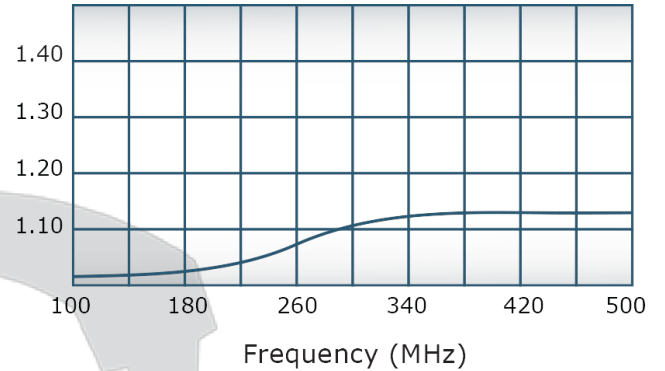

Isolation:

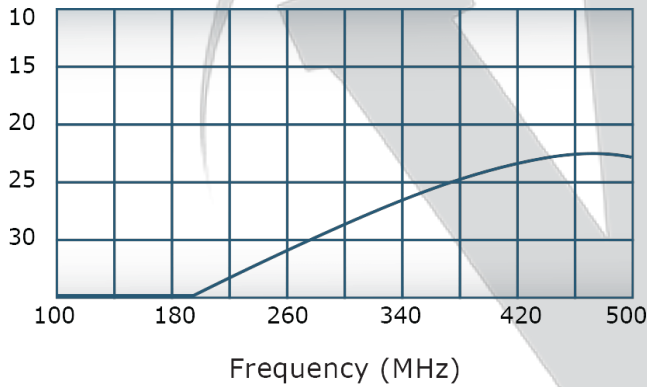

Phase Balance:

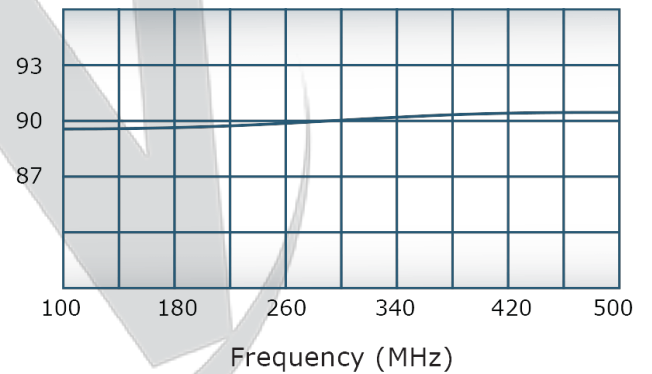


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

**RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION**  
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	12/1/2010	BW

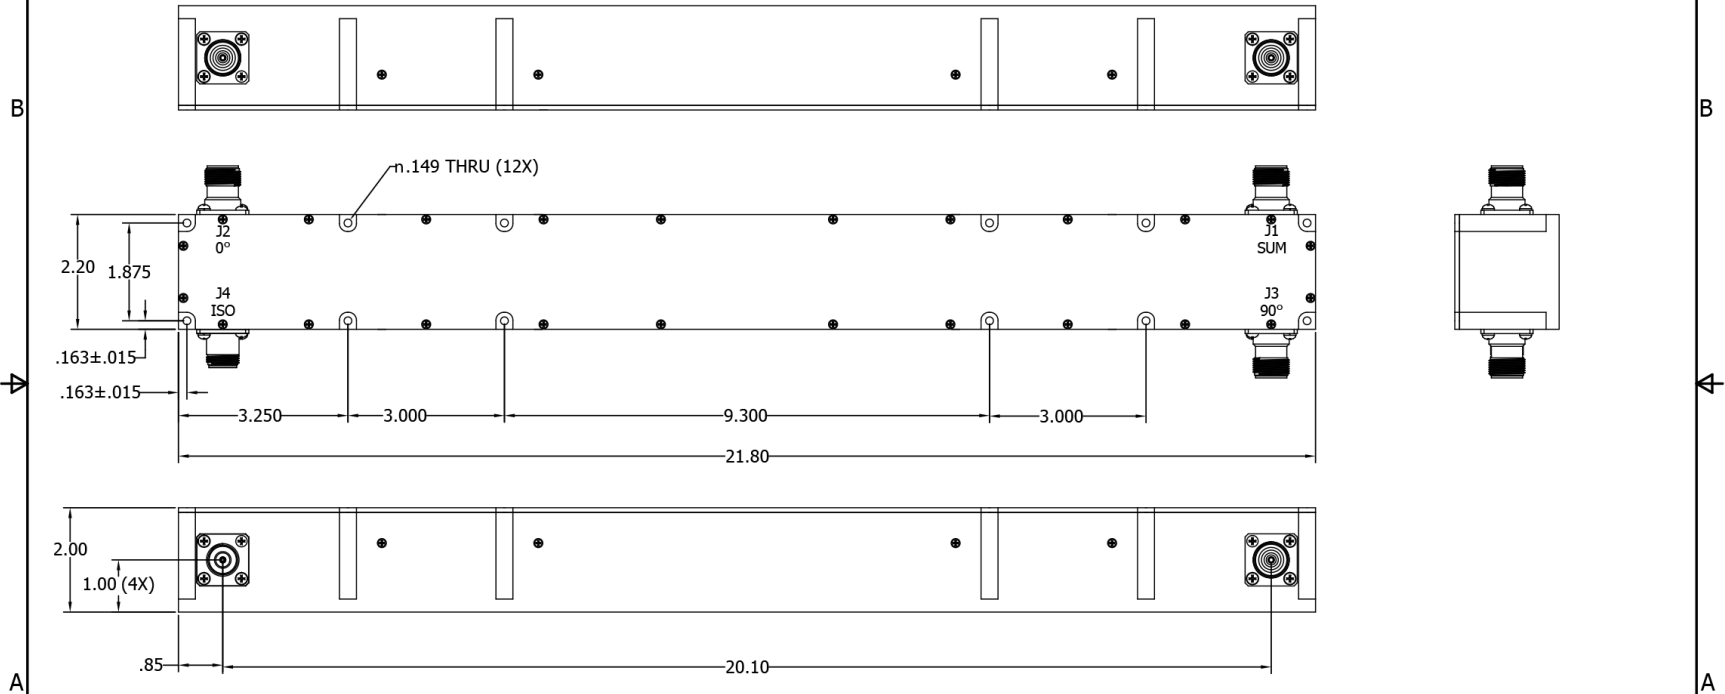

UNLESS OTHERWISE SPECIFIED		DWGN	DATE	<b>WERLATONE</b> SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563
• INTERPRET DRAWING LAW MIL-STD-100 • DIMENSIONING PER ASME Y14.5M-2009 • DIMENSIONAL LIMITS APPLY BEFORE PROCESSING • DIMENSIONS ARE IN INCHES • TOLERANCES: ANGLES ±2° 3 PL. ± .005 2 PL. ± .015		GP	12/1/2010	
		CHK	DATE	TITLE
		BW	12/2/2010	
		ENGR	DATE	SIZE
		MPGR	DATE	CAGE CODE
		QA	DATE	DWG NO
		RLSE	DATE	B 28812 20701-500
THIRD ANGLE PROJECTION		SCALE		REV
		1:2		-
				SHEET 1 OF 1

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.  
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com