



PRODUCT DATA SHEET OH9044 Our patented 3 dB 90° Hybrid Couplers provide: • Superior component performance starting at 3:1 Bandwidth. • Thicker center boards for high power and increased repeatability. • Bonded structures which eliminate any air gaps between substrates. • More sections per bandwidth for better coupling flatness. • Electrically shorter and physically smaller RF components. Features: High Power Wide Bandwidths Small Size Connectorized Drop-In & Surface Mount **Electrical Specifications:** 100 - 512 MHz Frequency: 400 W CW Power: Insertion Loss: 0.4 dB Max. VSWR: 1.30:1 Max. Phase Balance: 90° <u>+</u> 5° Max. Amplitude Balance: <u>+</u> 0.6 dB Max. 20 dB Min. Isolation: Mechanical Specifications: Connectorized Type: Material: Aluminum 6061-T6 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available -55°C to +75°C Operating Temperature: -60°C to +85°C Storage Temperature: Weight: 0.75 lbs. 4.0 x 1.92 x 1.1" Size: **Connector Configurations:** 0°, 90° (J2,J3) Ext. Load Port Model Sum Port (J1) OH9044-10 N Female N Female N Female OH9044-12 N Female SMA SMA OH9044-102 SMA SMA SMA QH9044-300 TNC TNC TNC

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



PRODUCT DATA SHEET




QH9044

Performance Data (Specifications subject to change without notice): Coupling: VSWR: -2.0 2.0 1.8 -3.0 1.6 -4.0 1.4 -5.0 1.2 1.0 -6.0 100 182 265 347 430 512 182 347 265 430 512 Frequency (MHz) Frequency (MHz) Phase Balance: Isolation: 105 -15 100 -20 -25 95 -30 90 -35 85 80 -40 100 182 265 347 430 512 182 265 347 430 100 512 Frequency (MHz) Frequency (MHz)

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

QH9044 Rev.-

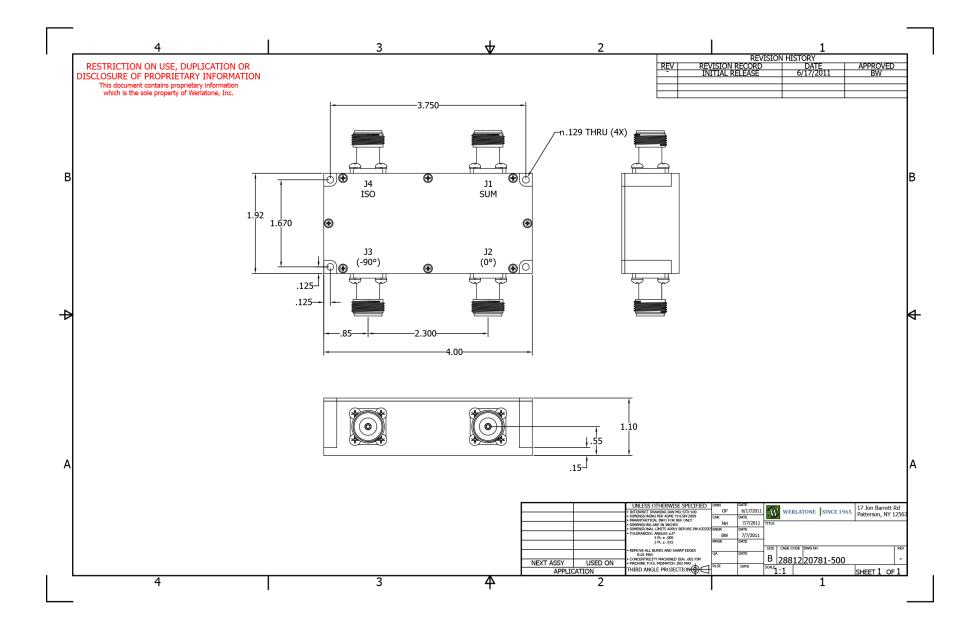

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com