



# WERLATONE

Model QH9338

90° Hybrids Connectorized



## PRODUCT DATA SHEET

QH9338

### Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

### Features:

High Power

Wide Bandwidths

Small Size

Connectorized

Drop-In & Surface Mount

### Electrical Specifications:

Frequency:	20 - 520 MHz
Power:	250 W CW
Insertion Loss:	0.6 dB Max.
VSWR:	1.30:1 Max.
Phase Balance:	90° $\pm$ 10° Max.
Amplitude Balance:	$\pm$ 0.3 dB Max.
Isolation:	20 dB Min.

### Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Size:	2.7 x 2.7 x 1.25"

### Connector Configurations:

Model	Sum Port (J1)	90°, 0° (J2,J3)	Ext. Load Port
QH9338-10	N Female	N Female	Not Applicable
QH9338-12	N Female	SMA	Not Applicable
QH9338-102	SMA	SMA	Not Applicable
QH9338-301	TNC Female	N Female	Not Applicable
QH9338-302	TNC Female	SMA	Not Applicable

**Werlatone's** breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



# WERLATONE

Model QH9338

90° Hybrids Connectorized




## PRODUCT DATA SHEET


QH9338

### Performance Data (Specifications subject to change without notice):


Coupling:

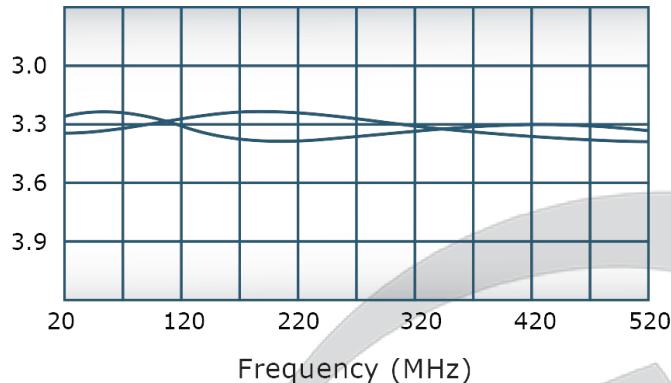


VSWR:

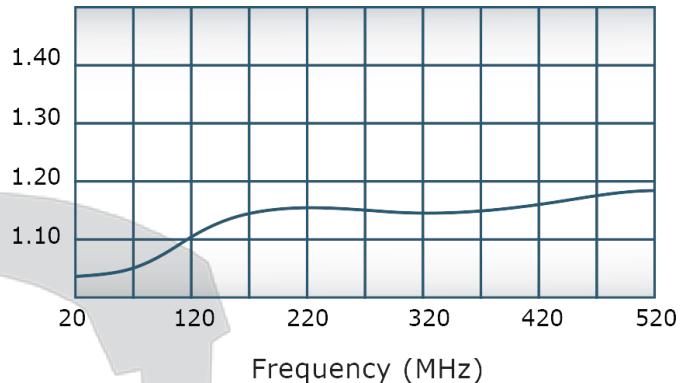

Isolation:

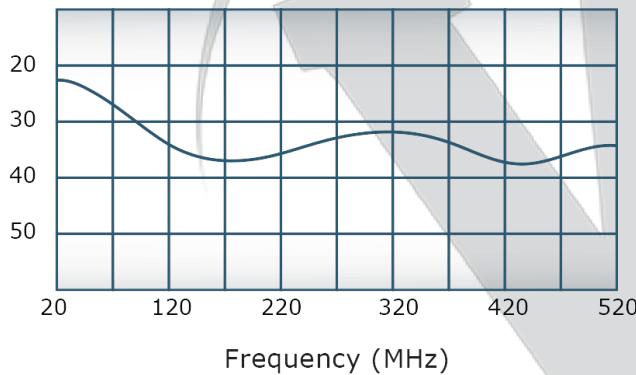

Phase Balance:

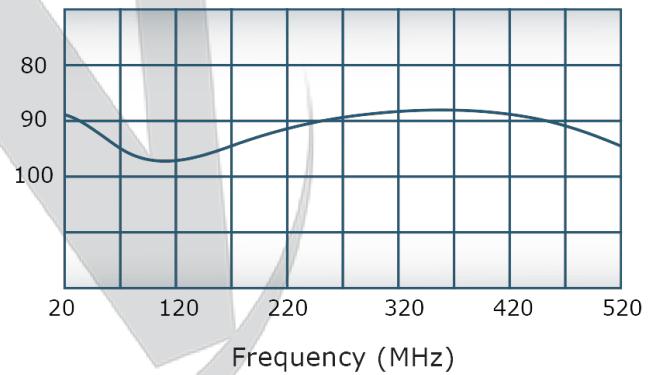




Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR  
DISCLOSURE OF PROPRIETARY INFORMATION  
This document contains proprietary information  
which is the sole property of Werlatone, Inc.

REVISIONS

ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	INITIAL RELEASE	5/7/2012	

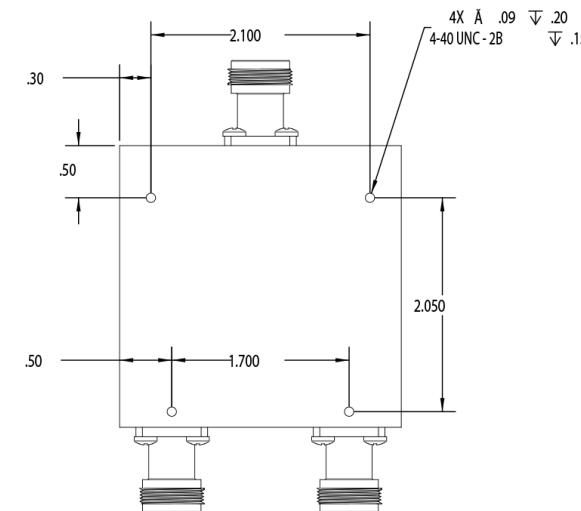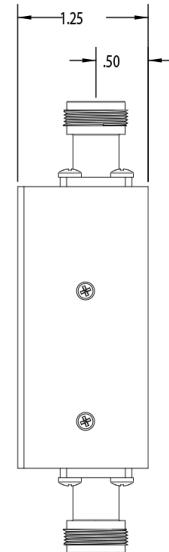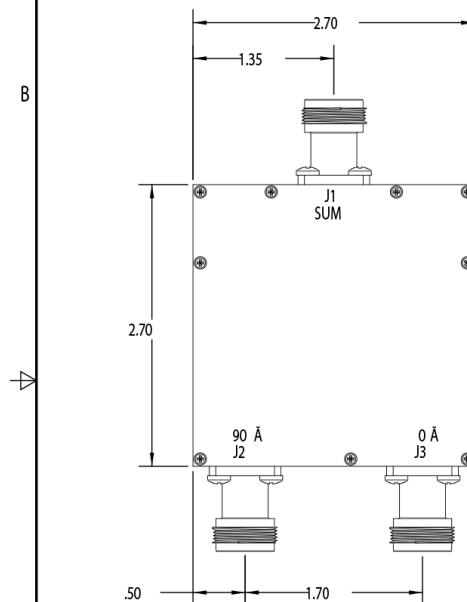

UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE	WERLATONE   SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563
INTERFERENCING PARTS MUST BE REMOVED OR CHANGED AS MAY BE NECESSARY	CHK	DATE	5/7/2012		
ALL DIMENSIONS ARE IN INCHES	SPGR	DATE			
ALL DIMENSIONS ARE INCHES	APPR	DATE			
ALL DIMENSIONS ARE INCHES	DA	DATE			
ALL DIMENSIONS ARE INCHES	RELE	DATE			
ALL DIMENSIONS ARE INCHES					
NEXT ASSY	USED ON				
APPLICATION	THIRD ANGLE PROJECTION				

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.  
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com