
PRODUCT DATA SHEET
QH10828
Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Connectorized Drop-In & Surface Mount

Electrical Specifications:

Frequency:	1000 - 8000 MHz
Power:	100 W CW
Insertion Loss	0.9 dB Max.
VSWR:	1.40:1 Max.
Phase Balance:	± 5° dB Max.
Amplitude Balance:	± 0.7 dB Max. (1200-8000 MHz) ± 1.5 dB Max. (1000-1200 MHz)
Isolation:	17 dB Min.


Mechanical Specifications:

Type:	Surface Mount
Plating Options:	QH10828-Pb: Electrodeposited Tin/Lead QH10828-Sn: Immersion Tin (RoHS Compliant) QH10828-Ag: Immersion Silver (RoHS Compliant)
Size:	0.65 x 0.5 x 0.07"

Port Configurations:


J1	J2	J3	J4
Input	3 dB, 0°	-3 dB, -90°	Isolated
-3 dB, 0°	Input	Isolated	-3 dB, -90°
-3 dB, -90°	Isolated	Input	-3 dB, 0°
Isolated	-3 dB, -90°	-3 dB, 0°	Input

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.




Performance Data (Specifications subject to change without notice):

Plot 1: Coupling & Insertion Loss, Plot 2: Phase Balance, Plot 3: Isolation, Plot 4: VSWR

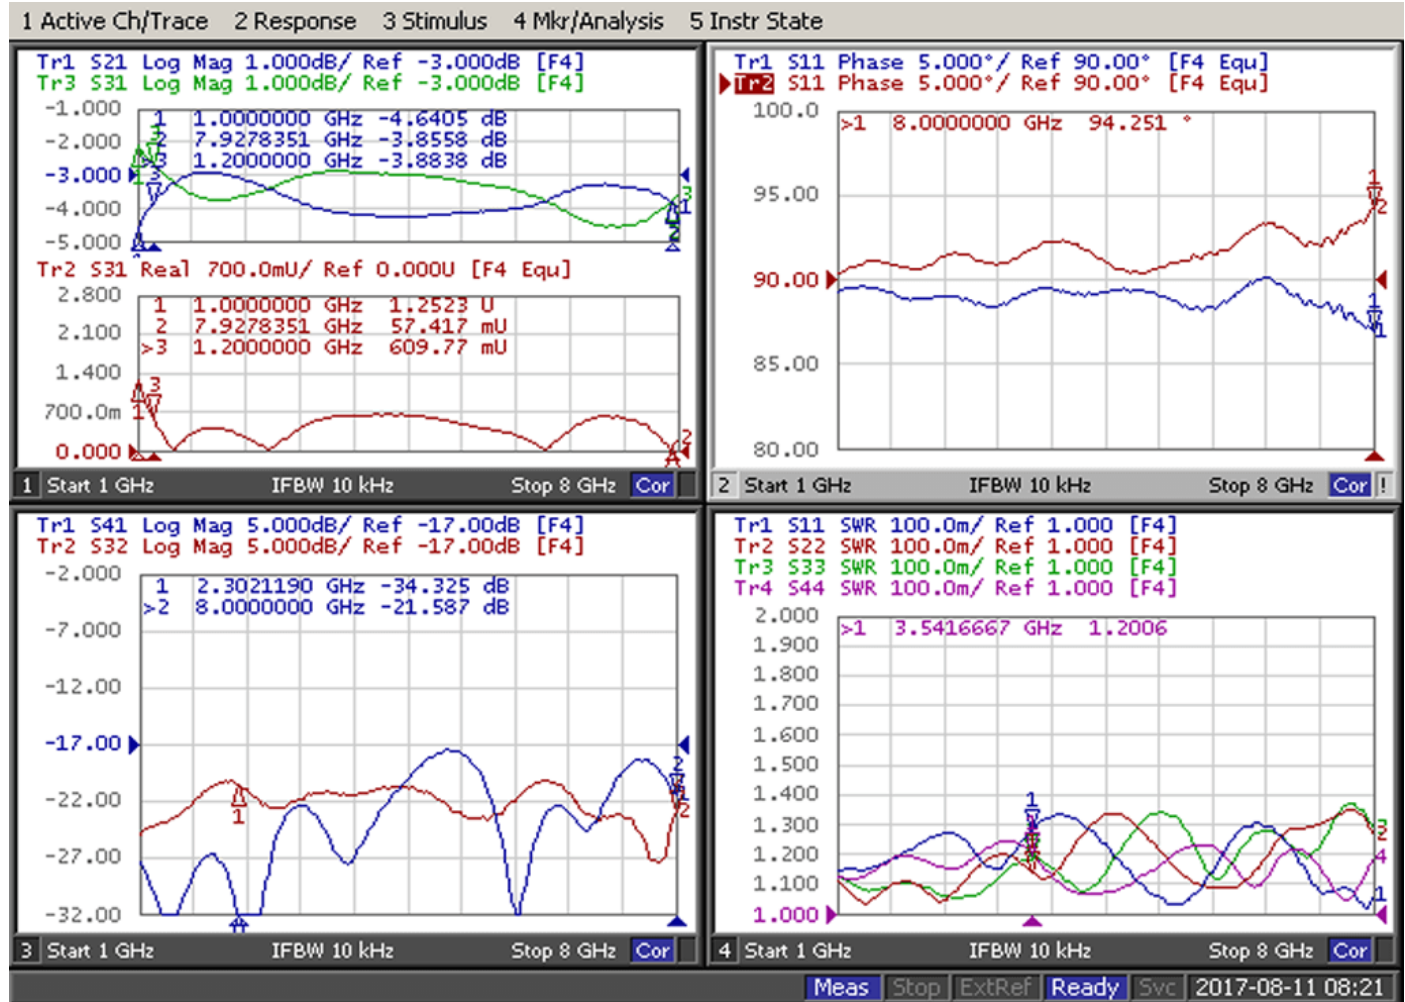

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	PRE-RELEASE	2/1/2017	CS
A	ECN9328	6/1/2017	CS
B	ECN10098	9/16/21	CS

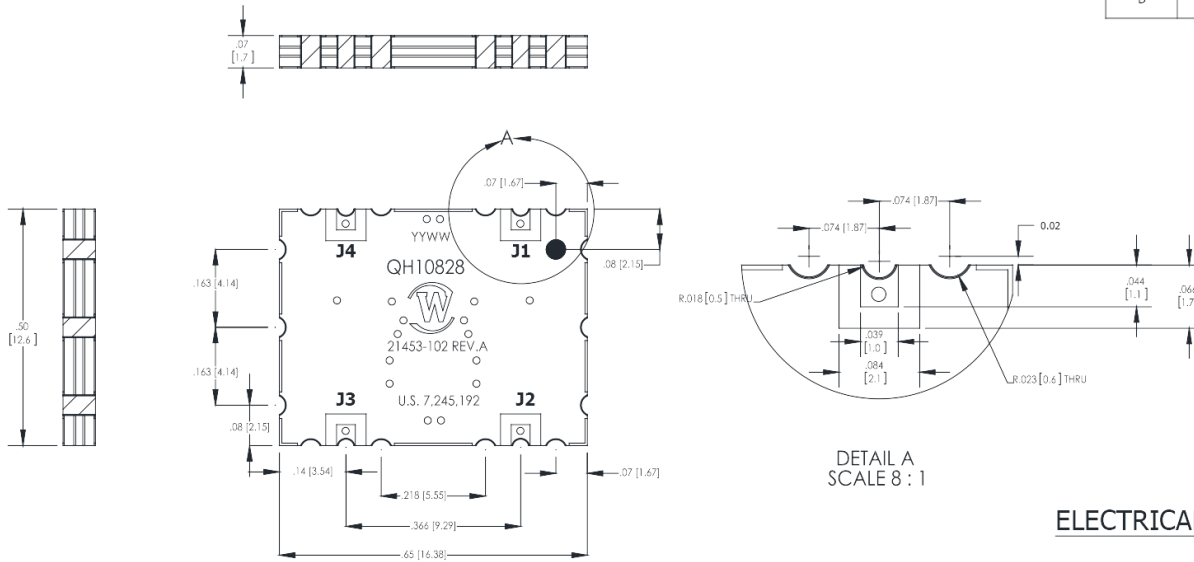

Port Configurations			
J1	J2	J3	J4
Input	-3 dB, 0°	-3 dB, -90°	Isolated
-3 dB, 0°	Input	Isolated	-3 dB, -90°
-3 dB, -90°	Isolated	Input	-3 dB, 0°
Isolated	-3 dB, -90°	-3 dB, 0°	Input

DETAIL A
SCALE 8 : 1

ELECTRICAL SPECIFICATIONS

Frequency: 1000 - 8000 MHz
 Power: 60 Watts CW
 Insertion Loss: 0.9 dB Max.
 Amplitude Balance: ±0.7 dB Max. 1200-8000 MHz
 ±1.5 dB Max. 1000 - 1200 MHz
 Phase Balance: ± 5° Max.
 VSWR: 1.4 :1
 Isolation: 17 dB Min.

NOTES: UNLESS OTHERWISE SPECIFIED

- SURFACE MOUNT UNIT**
- SURFACE FINISH: IMMERSION SILVER (RoHS Compliant). OTHER SURFACE FINISHES AVAILABLE UPON REQUEST.**
- SEE SURFACE MOUNT TECH NOTE FOR INSTALLATION GUIDELINES.**

UNLESS OTHERWISE SPECIFIED		DWN	DATE	WERLATONE SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563
• INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100 • DIMENSIONING PER ASME Y14.5M-2009 • DIMENSIONAL UNITS PER PART ONLY • DIMENSIONS ARE IN INCHES (mm) • DIMENSIONAL LIMITS APPLY TO ALL PROCESSES • TOLERANCES: ANGLES = ± 3 PL = .005 [1.3] 2 PL = .015 [4]		MB	2/1/2017	
QH10828		CHK	DATE	OUTLINE SIZE CAGE CODE DWG NO B 28812 21453-500
NEXT ASSY USED ON		BW	2/1/2017	
APPLICATION		ENGR	DATE	REV
		MB	2/1/2017	B
		MFR	DATE	
		QA	DATE	
		RLSE	DATE	
		SCALE		SHEET 1 OF 1
		4:1		

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com