
WERLATONE

Model QH8105
90° Hybrids Surface Mount (SMT) & Drop



PRODUCT DATA SHEET **QH8105**

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency:	800 - 4200 MHz
Power:	150 W CW
Insertion Loss	0.55 dB Max.
VSWR:	1.35:1 Max.
Phase Balance:	± 5° dB Max.
Amplitude Balance:	± 0.5 dB Max.
Isolation:	18 dB Min.

Mechanical Specifications:

Type:	Surface Mount
Plating Options:	QH8105-Sn: Immersion Tin (RoHS) QH8105-Ag: Immersion Silver (RoHS) QH8105-Au: ENIG (RoHS) QH8105-Pb: ED Tin/Lead
Size:	1.5 x 1.08 x 0.09"
Weight:	5 grams


Port Configurations:

J1	**J2**	**J3**	**J4**
Sum Port	90° Port	0° Port	Isolated Port

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

Werlatone, Inc.All Rights Reserved




Performance Data (Specifications subject to change without notice):


Coupling:

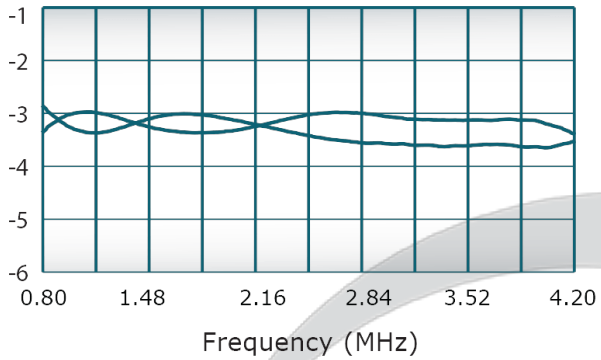


VSWR:

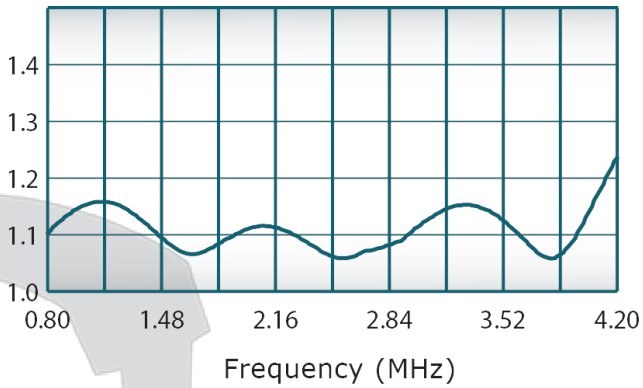

Isolation:

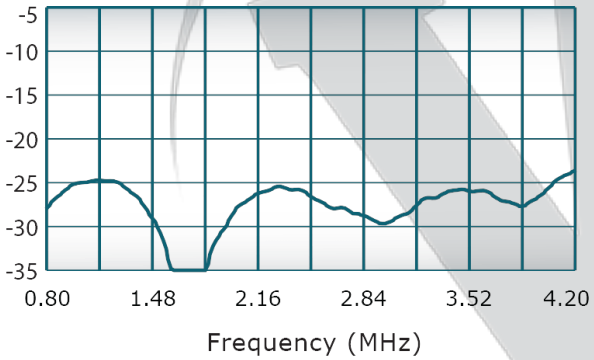

Phase Balance:

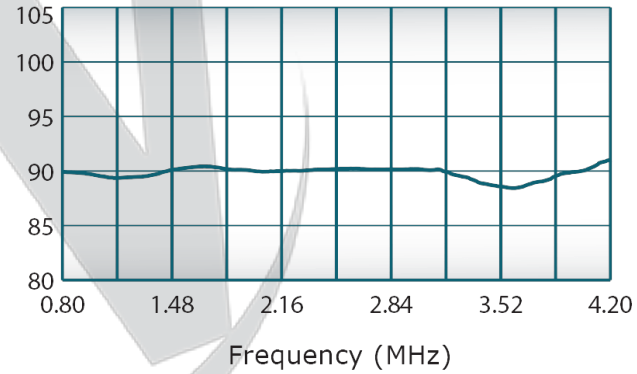


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISIONS			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	10/19/2012	GP
A	ECN 7577	10/19/2012	GP
B	ECN 8213	6/6/2013	BW
C	ECN 10009	3/5/2021	BW

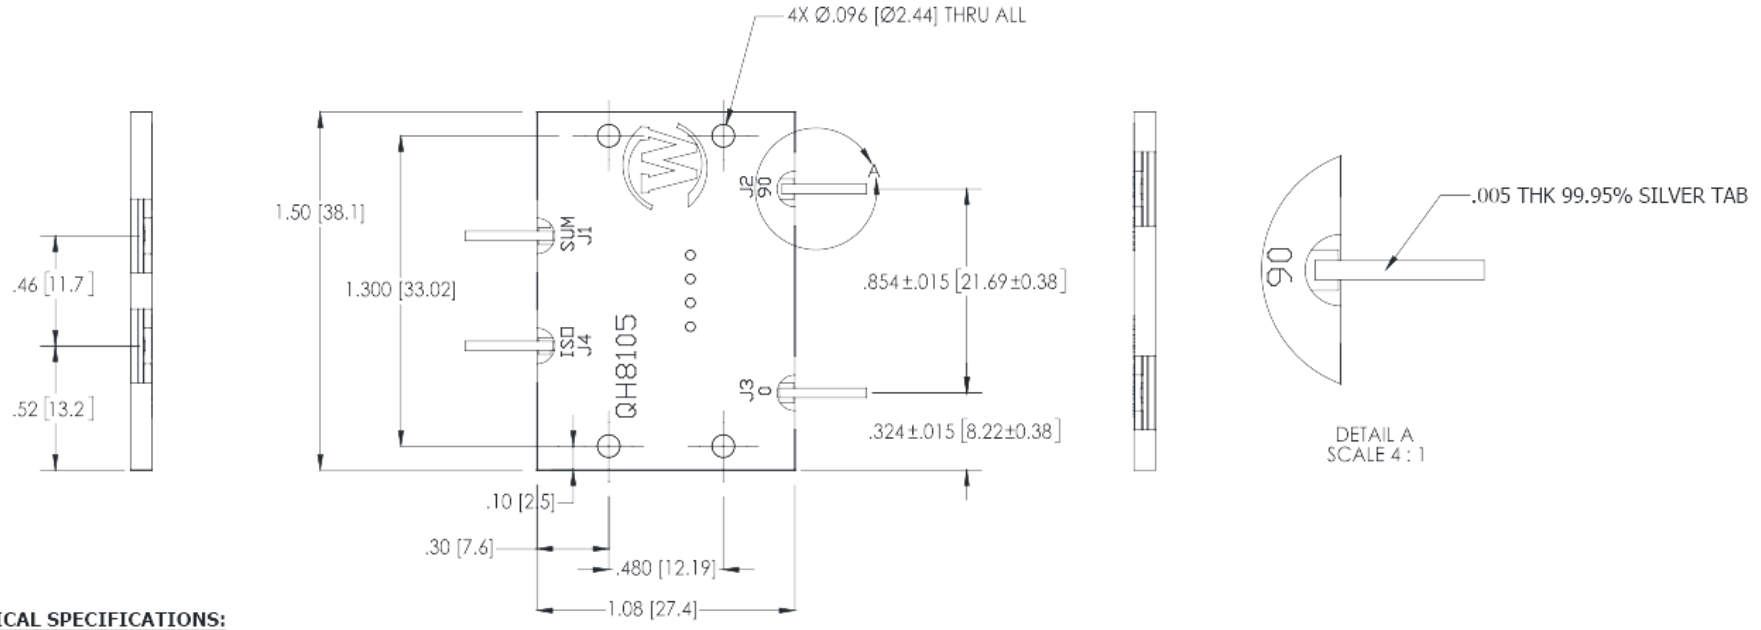

ELECTRICAL SPECIFICATIONS:

Frequency:	0.8 - 4.2 GHz
Power:	150 Watts CW
Insertion Loss:	0.55 db Max.
Amplitude Balance:	±0.5 db Max.
Phase Balance:	90° ± 5° Max. (J2-J3)
VSWR:	1.35:1
Isolation:	18 dB Min.
Operating Temperature:	-55°C To +85°C

CREATE CAVITY IN PCB AND MOUNT THIS SURFACE TO HEATSINK. LEADS SHOULD BE ON SAME PLANE AS MICROSTRIP TRACE.
ALTERNATIVELY, THIS SURFACE COULD BE SOLDERED TO A GND PLANE ON PCB WITH THERMAL VIA ARRAY.

NOTES: UNLESS OTHERWISE SPECIFIED

1. **4X LEADS/TABS SHOULD BE SOLDERED TO 50 Ω TRANSMISSION LINES.**
2. **BODY OF PART IS GND AND IS A SOLDERABLE SURFACE.**
3. **ORDERING INFORMATION:**

QH8105-PB-T

- INTERFACE
  - -T: RF TABS / LEADS
  - BLANK: NO TABS. SOLDER PAD.
- Surface Finish
  - Pb: ED Tin/Lead
  - Ag: Immersion Silver
  - Sn: Immersion Tin
  - Au: ENIG

UNLESS OTHERWISE SPECIFIED
- INTERPRET DRAWING PER MIL-STD-100
- DIMENSIONING PER ASME Y14.5M-2009
- PARENTHETICAL INFO FOR REF ONLY
- DIMENSIONS ARE IN INCHES
- DIMENSIONAL LIMITS APPLY BEFORE PROCESSES
- TOLERANCES: ANGLES ±2° / 3 PL ± .005 / 2 PL ± .015
- REMOVE ALL BURRS AND SHARP EDGES 0.01 MAX
- CONCENTRICITY MACHINED DIA: .002 TIR
- MACHINE TOOL MISMATCH .000 MAX

DWN GP 10/19/2012 | CHK | ENGR | MFGR | QA | RLSE

THIRD ANGLE PROJECTION

NEXT ASSY | USED ON | APPLICATION

WERLATONE SINCE 1965 | 17 Jon Barrett Rd Patterson, NY 12563

TITLE: QH8105 -3dB Hybrid Coupler

SIZE	CAGE CODE	DWG NO	REV
B	28812	20406-500	C

SCALE 2:1 | SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com