


**PRODUCT DATA SHEET**
**AF9255**
**Werlatone® Low Pass, High Pass, and Band Pass Filters**

- **Eliminate** instability of power amplifiers at out-of-band frequencies.
- **Eliminate** excessive In-Band ripples due to out-of-band reflected energies.
- **Eliminate** the false trigger of power-detector circuitry due to reflected harmonics.
- **Eliminate** potential damage to power amplifiers due to reflection of high power out-of-band energies.

**Features:**

Low Pass, High Pass, Band Pass	UHF, VHF, 800 MHz Designs	Custom Designs Available Upon Request
--------------------------------	---------------------------	---------------------------------------

**Electrical Specifications:**

Frequency:	10 - 170 MHz 300-1500 MHz	(Pass Band) (Stop Band)
Power:	50 W CW 10 W CW	(10-170 MHz) (170-1500 MHz)
Insertion Loss:	0.6 dB Max.	(Pass Band)
VSWR:	1.25:1 Max. 1.60:1 Max.	(10-170 MHz) (170-1500 MHz)
Rejection:	50 dB Min.	(300-1500 MHz)

**Mechanical Specifications:**

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Humidity:	95% Non-Condensing
Size:	2.5 x 1.265 x 1.0"

**Port Configurations:**

Model	Input/Output(J1)	Input/Output(J2)
AF9255-10	N Female	N Female
AF9255-12	N Female	SMA Female
AF9255-102	SMA Female	SMA Female

**Werlatone®** supplies High Power Low Pass, High Pass, and Band Pass Absorptive Filters. Our patented line of Absorptive Filters internally terminates out-of-band signals, preventing them from generating undesirable intermodulation products. In-band signals are transmitted through the filter. Our **Mismatch Tolerant®** design greatly reduces the dependency of the system on the length of interconnecting cable between two non-perfect components (for example, between the power amplifier and antenna).


**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



## Performance Data (Specifications subject to change without notice):

Plot 1. Insertion Loss & Rejection Plot 2. Return Loss

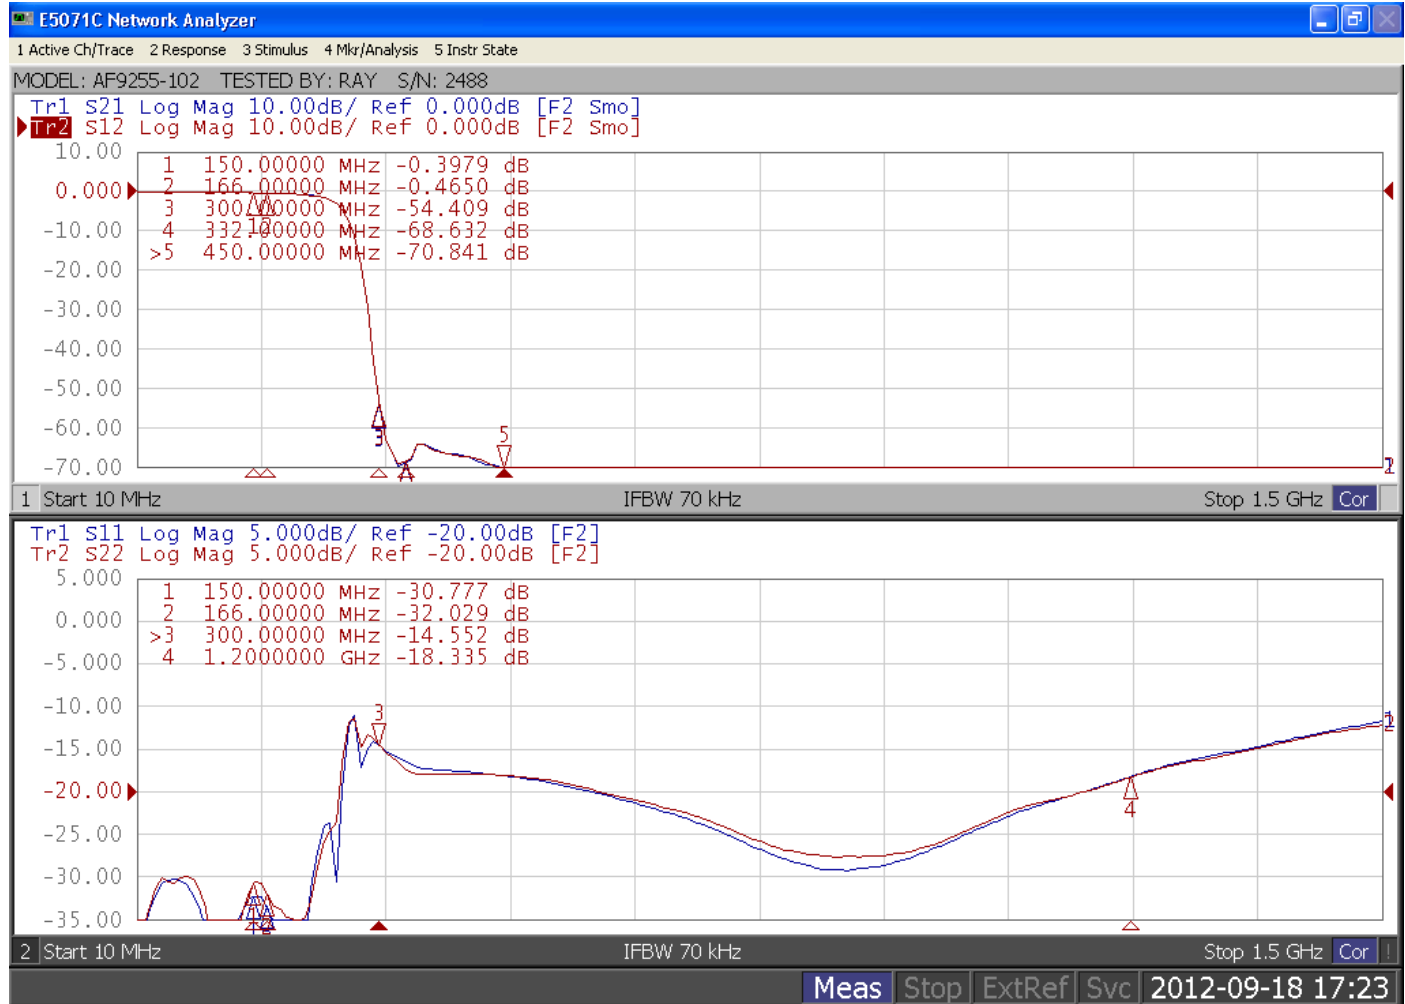


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION  
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY					
DATE	REV	REVISION RECORD	AUTH	CHK	APPV
4/23/12	-	INITIAL RELEASE	AK	BW	BW

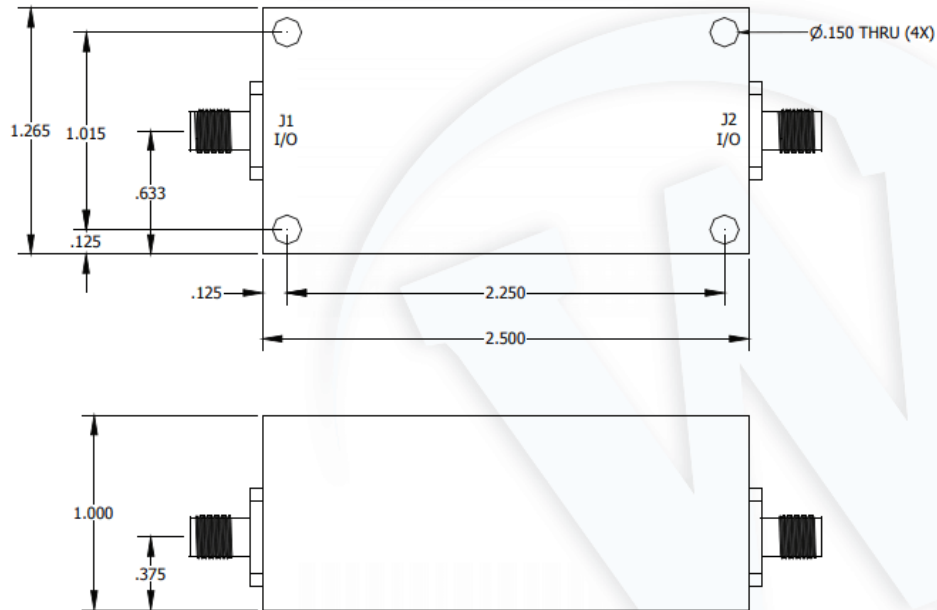

UNLESS OTHERWISE SPECIFIED		DWN	DATE	<b>WERLATONE   SINCE 1965</b>	17 Jon Barrett Rd Patterson, NY 12563	
* INTERPRET DIMENSIONS IN ACCORDANCE WITH ASME Y14.5M-2009 * DIMENSIONING PER ASME Y14.5M-2009 * PARENTHESES FOR REF ONLY * DIMENSIONS ARE IN INCHES * DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		AK	4/23/2012		TITLE	
* TOLERANCES: ANGLES ± 2° .XXX ± .005 .XX ± .01		CHK	4/23/2012	<b>OUTLINE</b>		
* HOLE TOLERANCES ± .004/- .003 * REMOVE ALL BURRS AND SHARP EDGES @ R MAX * CONCENTRICITY MATCHED DIA. .003 FIM * MACHINE TOOL MISMATCH .003 MAX		ENGR	4/23/2012	USED ON		
THIRD ANGLE PROJECTION		PFGR	DATE	<b>AF9255</b>		
		QA	DATE	SIZE	CAGE CODE	DWG NO
		RLSE	DATE	A	28812	20856-500
				SCALE	1:1	
				SHEET 1 OF 1		

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.  
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com