



WERLATONE

Model D9559

Combiners In-Phase Connectorized Radial



PRODUCT DATA SHEET

D9559

Werlatone® Mismatch Tolerant® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

Features:

High Power

Wide Bandwidths

Small Size

Custom Designs Available

Electrical Specifications:

Frequency: 2200 - 2750 MHz
Power: 40 W CW
Insertion Loss: 0.4 dB Max.
VSWR: 1.40:1 Max.
Phase Balance: ± 4° Max.
Amplitude Balance: 0.25 dB Max.
Isolation: Non-Isolated

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F Type II
Class 3 (Trivalent)
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Weight: 1.5 lbs.
Size: RADIAL

Connector Configurations:

Model
D9559-12

Sum Port (J33)
N Female

Input/Output (J1-J32)
SMA

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



WERLATONE

Model D9559

Combiners In-Phase Connectorized Radial




PRODUCT DATA SHEET


D9559

Performance Data (Specifications subject to change without notice):

Insertion Loss:

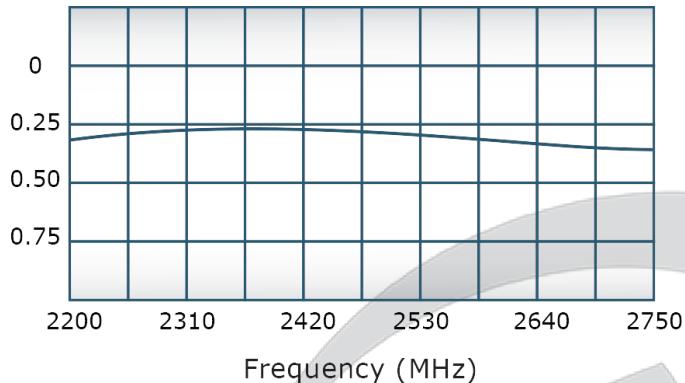


VSWR:

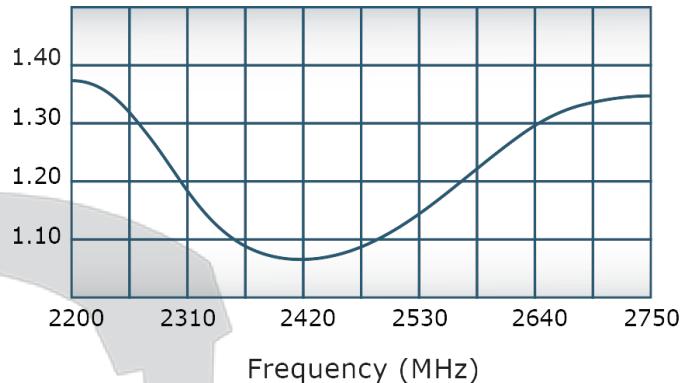

Since 1965:



Phase Balance:

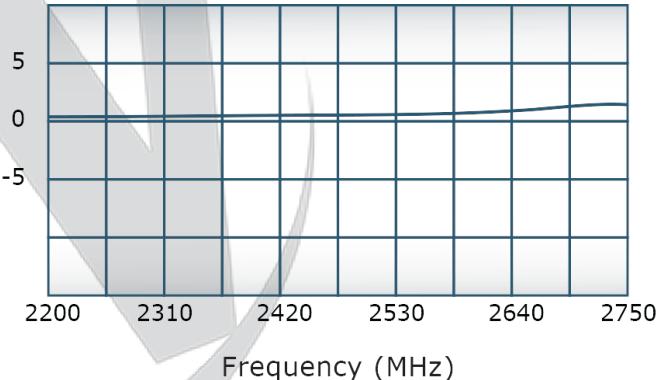

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

