
PRODUCT DATA SHEET
D10629

Werlatone® Mismatch Tolerant® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

Features:

High Power Wide Bandwidths Small Size High Isolation Custom Designs Available

Electrical Specifications:

Frequency: 80 - 1000 MHz
 Power: 2000 W CW (80-400 MHz), 1600 W CW (400-600 MHz), 1000 W CW (600-1000 MHz)
 Insertion Loss: 0.65 dB Max.
 VSWR: 1.35:1 Max.
 Phase Balance: $\pm 5^\circ$ Max.
 Amplitude Balance: 0.3 dB Max.
 Isolation: 15 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Weight: 4 lbs.
 Size: 5.7 x 4.7 x 1.75"

Connector Configurations:

Model	Sum Port (J1)	Input/Output (J2-J5)
D10629-10	N Female	N Female
D10629-20	7/16 Female	N Female
D10629-22	7/16 Female	SMA
D10629-41	SC Female	N Female

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




Performance Data (Specifications subject to change without notice):


Insertion Loss:

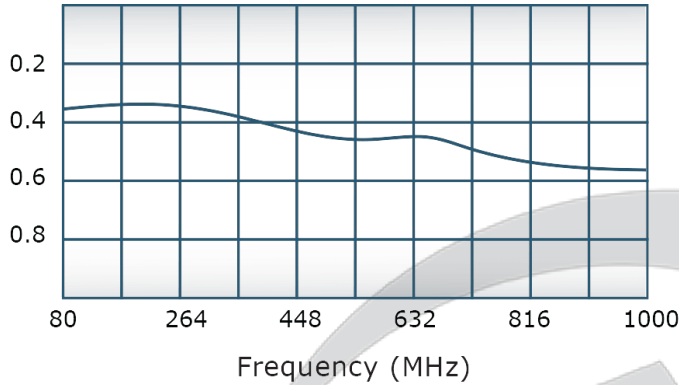


VSWR:

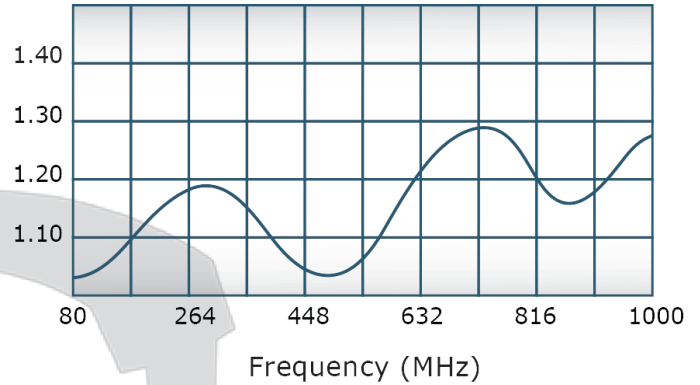

Isolation:

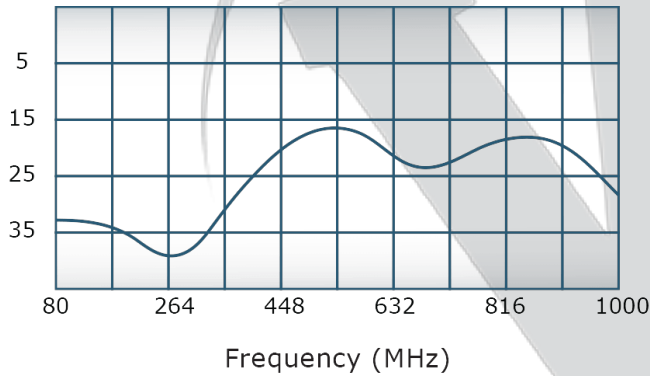

Phase Balance:

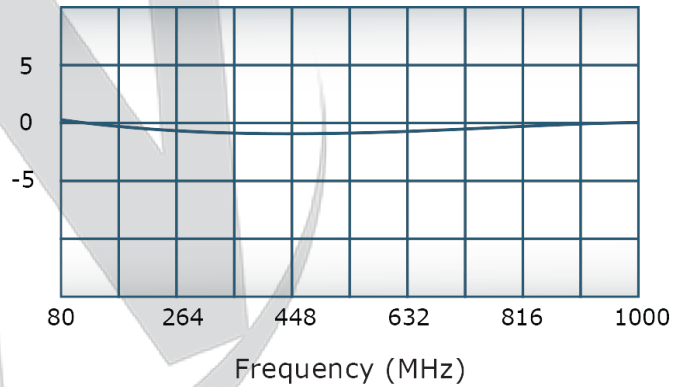




Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY					
DATE	REV	REVISION RECORD	AUTH	CHK	APPV
7/28/11	-	INITIAL RELEASE	PR		
5/28/13	A	8198	PR		
12/14/18	B	9718	PK		

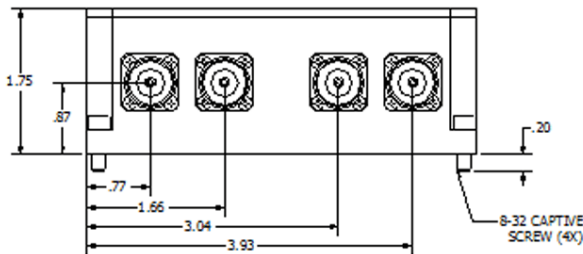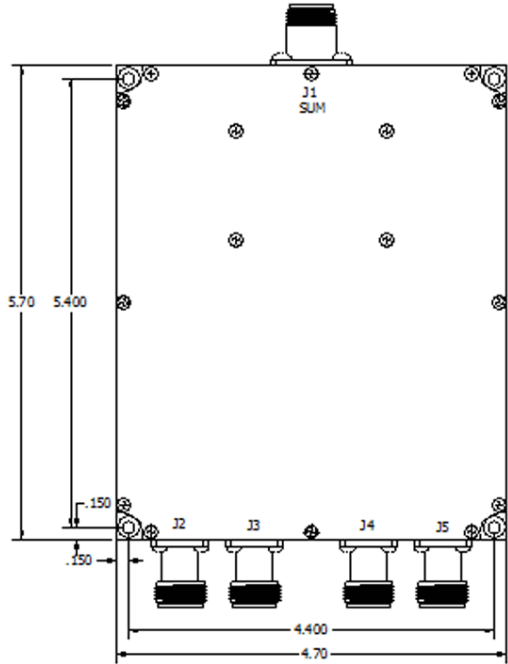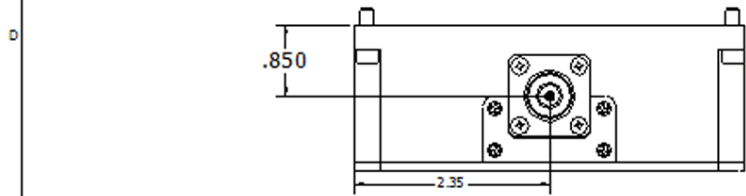

UNLESS OTHERWISE SPECIFIED

- * REFER TO DRAWING SAU-10420-000
- * DIMENSIONS PER ASME Y14.5M-2009
- * PRACTICAL TYP. TOLER. ONLY
- * DIMENSIONS ARE IN INCHES
- * DIMENSIONAL LIMITS APPLY BEFORE PROCESSES

* TOLERANCES

ANGLES	± .5°
XXX	± .005
XX	± .015

- * HOLE TOLERANCES = DIA ± .001
- * REMOVE ALL BURRS AND SHARP EDGES: D1 R MAX
- * CONCENTRICITY: MACHINED DIA: .005 FDI
- * MACHINE TOOL VARIATION: DIA MAX

THIRD ANGLE PROJECTION

DATE	7/28/2011	WERLATONE SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563	
DESIGNED BY	PR	OUTLINE			
DRAWN BY		D9075			
CHECKED BY		REV	DATE	BY	APPV
DATE		C	28812	20788-500	B
SCALE	1:1				SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com