PRODUCT DATA SHEET D10803

Werlatone® *Mismatch Tolerant*® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone**® designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

Features:

High Power Wide Bandwidths Small Size Custom Designs Available

Electrical Specifications:

Frequency: 700 - 6500 MHz
Power: 300 W CW
Insertion Loss: 0.6 dB Max.
VSWR: 1.40:1 Max.
Phase Balance: ± 5° Max.
Amplitude Balance: 0.2 dB Max.
Isolation: Non-Isolated

Mechanical Specifications:

Type: Connectorized Material: Aluminum 6061-T6

Surface Finish: Electroless Nickel-ASTM B733 Type IV

Operating Temperature: -55°C to $+75^{\circ}\text{C}$ Storage Temperature: -60°C to $+85^{\circ}\text{C}$ Weight: 1 lb. 2 oz. (-10) Size: $5.5 \times 2.4 \times 1.06^{\circ}$

Connector Configurations:

Input/Output (J2) Sum Port (I1) Input/Output (J3) Model D10803-10 N Female N Female N Female Rt. Angle N Female D10803-10RT Rt. Angle N Female Rt. Angle N Female D10803-12 N Female SMA SMA N Female D10803-20 7/16 Female N Female

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


PRODUCT DATA SHEET D10803

Performance Data (Specifications subject to change without notice):





VSWR:




Frequency (MHz)


Since 1965:



Phase Balance:

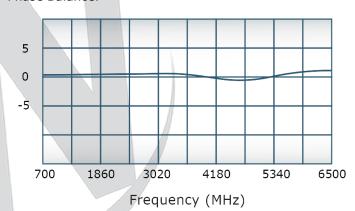

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

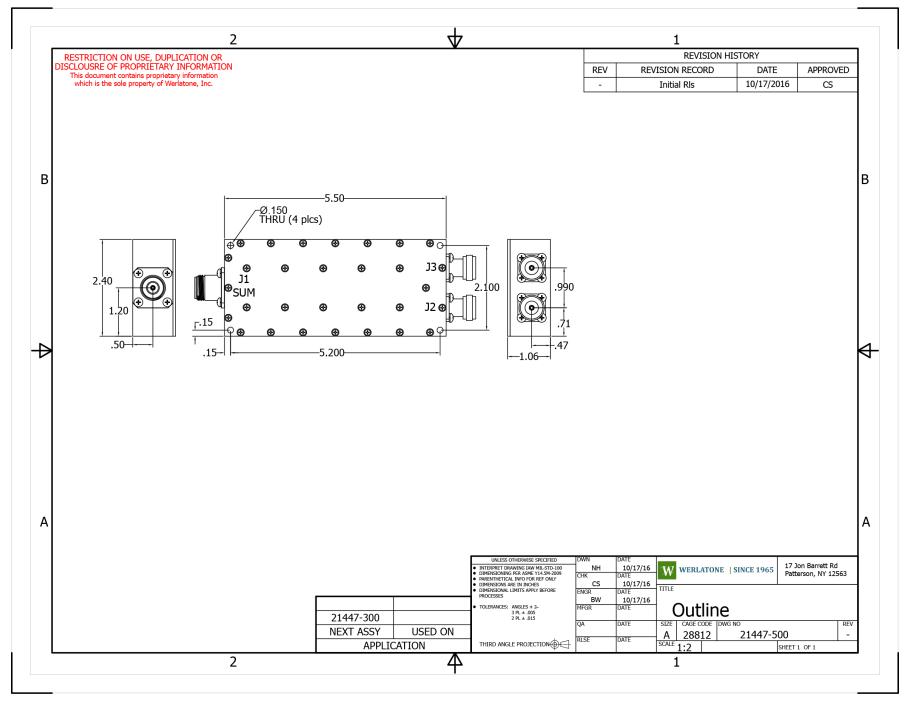

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com