


PRODUCT DATA SHEET
D10830

Werlatone® Mismatch Tolerant® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

Features:

High Power Wide Bandwidths Small Size Custom Designs Available

Electrical Specifications:

Frequency: 80 - 1000 MHz
 Power: 2000 W CW
 Insertion Loss: 0.5 dB Max.
 VSWR: 1.30:1 Max.
 Phase Balance: $\pm 5^\circ$ Max.
 Amplitude Balance: 0.25 dB Max.
 Isolation: Non-Isolated

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Weight: 3.5 lbs.
 Size: 5.0 x 5.5 x 1.71"

Connector Configurations:

Model	Sum Port (J1)	Input/Output (J2)	Input/Output (J3)
D10830-28	7/16 Female	7/16 Female	7/16 Female
D10830-296	7/16 Female	SC Female	SC Female

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.




PRODUCT DATA SHEET


D10830

Performance Data (Specifications subject to change without notice):

Insertion Loss:

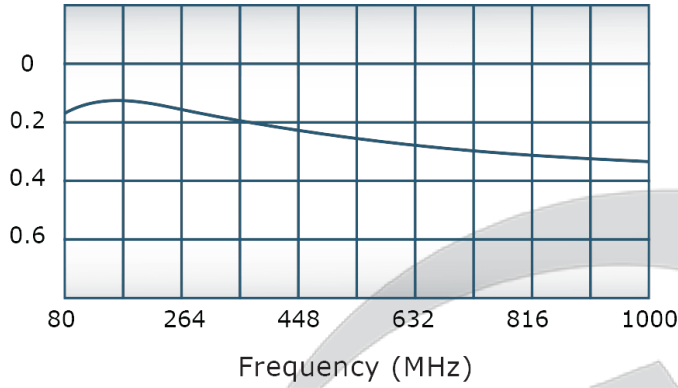

VSWR:

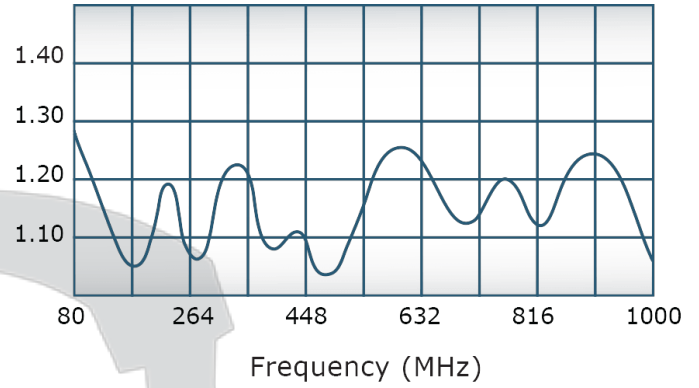


Since 1965:



SINCE 1965

Phase Balance:

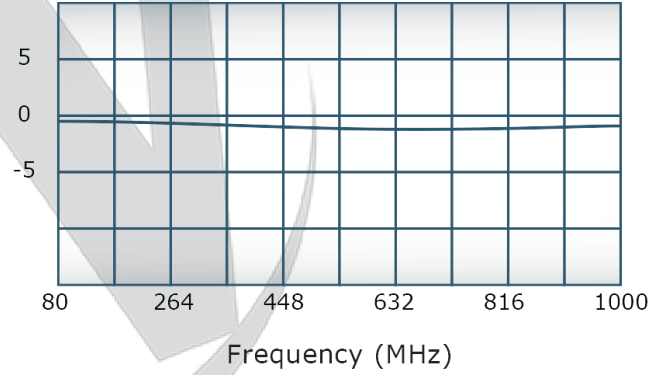


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	1/13/2016	BW

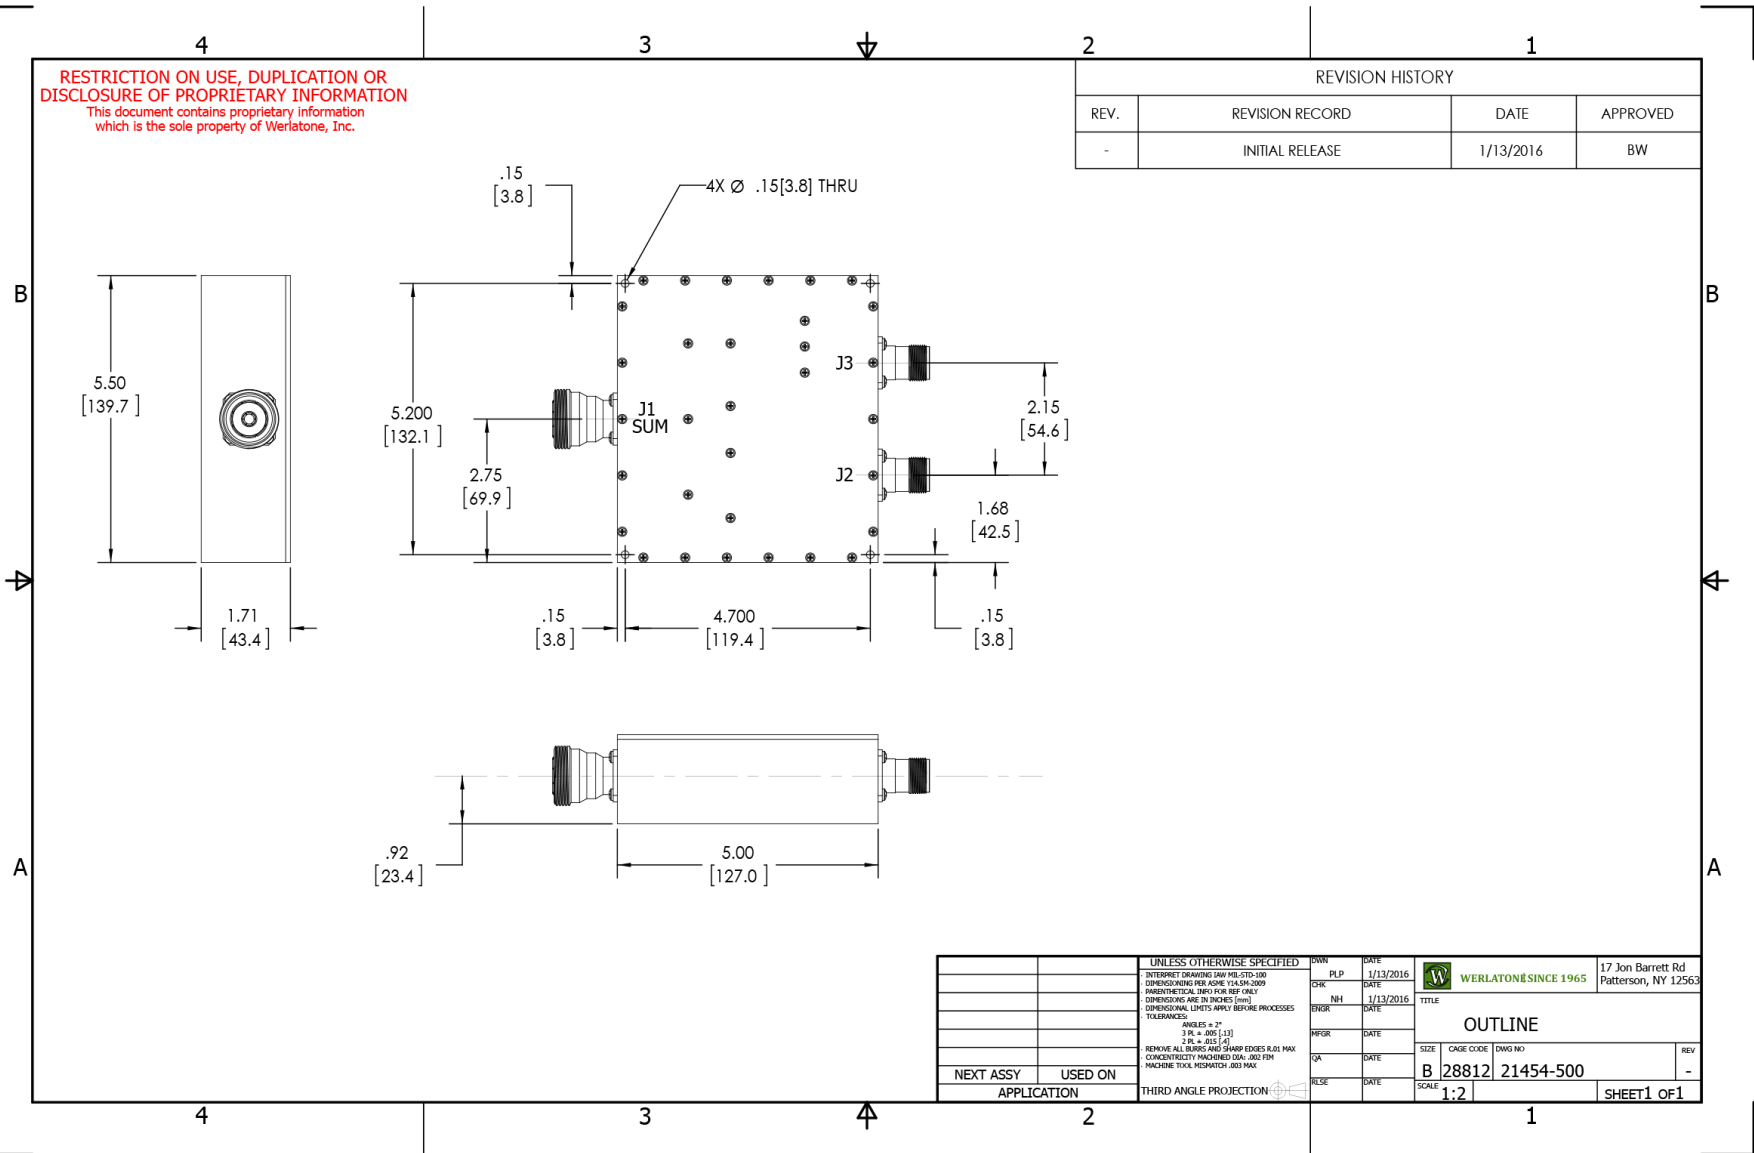

UNLESS OTHERWISE SPECIFIED		OWN	DATE	WERLATONE SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563
INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		PLP	1/13/2016	
DIMENSIONS ARE PER ASME Y14.5M-2009		CHK	DATE	TITLE OUTLINE
DIMENSIONS ARE IN INCHES (mm)		NH	1/13/2016	
DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		ENGR	DATE	SIZE CAGE CODE DWG NO B 28812 21454-500
TOLERANCES:		MPGR	DATE	
ANGLES = 3°		QA	DATE	SCALE 1:2
3 R. ± .005 [13]		RELE	DATE	
2 R. ± .015 [4]				SHEET 1 OF 1
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX				
CONCENTRICITY FRACTIONED DIA. .002 FPM				
MACHINE TOOL MISMATCH .003 MAX				
NEXT ASSY	USED ON			
APPLICATION				

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com