



D10830

## PRODUCT DATA SHEET Werlatone ® Mismatch Tolerant ® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide Werlatone® designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions. Features: High Power Wide Bandwidths Small Size Custom Designs Available **Electrical Specifications:** 80 - 1000 MHz Frequency: Power: 2000 W CW Insertion Loss: 0.5 dB Max. VSWR: 1.30:1 Max. Phase Balance: + 5° Max. Amplitude Balance: 0.25 dB Max. Isolation: Non-Isolated Mechanical Specifications: Connectorized Type: Aluminum 6061-T6 Material: Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available -55°C to +75°C Operating Temperature: -60°C to +85°C Storage Temperature: Weight: 3.5 lbs. Size: 5.0 x 5.5 x 1.71" **Connector Configurations:** Model Sum Port (J1) Input/Output (J2) Input/Output (J3) D10830-28 7/16 Female 7/16 Female 7/16 Female D10830-296 7/16 Female SC Female SC Female When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

Way Combiners are available upon request.

D10830 Rev.-

can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-



## **PRODUCT DATA SHEET**




D10830

## Performance Data (Specifications subject to change without notice): VSWR: Insertion Loss: 1.40 0 1.30 0.2 1.20 0.4 0.6 1.10 448 816 80 264 448 632 816 1000 80 264 632 1000 Frequency (MHz) Frequency (MHz) Since 1965: Phase Balance: 5 0 -5 448 632 816 80 264 1000 SINCE 1965 Frequency (MHz)

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D10830 Rev.-

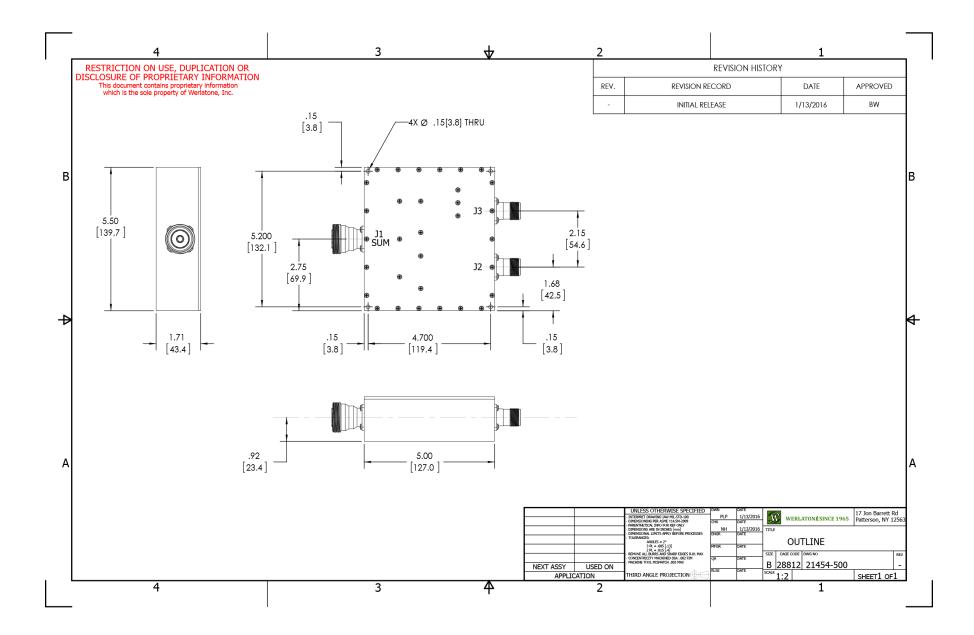

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com