WERLATONE

Model D2426
Combiners In-Phase Connectorized



PRODUCT DATA SHEET **D2426**

Werlatone® ***Mismatch Tolerant®*** High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

Features:

High Power | Wide Bandwidths | Small Size | High Isolation | Custom Designs Available

Electrical Specifications:

Frequency:	0.1 - 220 MHz
Power:	300 W CW
Insertion Loss:	1.7 dB Max.
VSWR:	1.35:1 Max.
Phase Balance:	± 8° Max.
Amplitude Balance:	0.75 dB Max.
Isolation:	20 dB Min.

Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Weight:	10 lbs.
Size:	9.0 x 8.0 x 3.6''

Connector Configurations:

Model	**Sum Port (J5)**	**Input/Output (J1-J4)**
D2426-10	N Female	N Female
D2426-12	N Female	SMA
D2426-13	N Female	BNC

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

Werlatone, Inc.All Rights Reserved


Model D2426
Combiners In-Phase Connectorized




PRODUCT DATA SHEET **D2426**

Performance Data (Specifications subject to change without notice):


Insertion Loss:

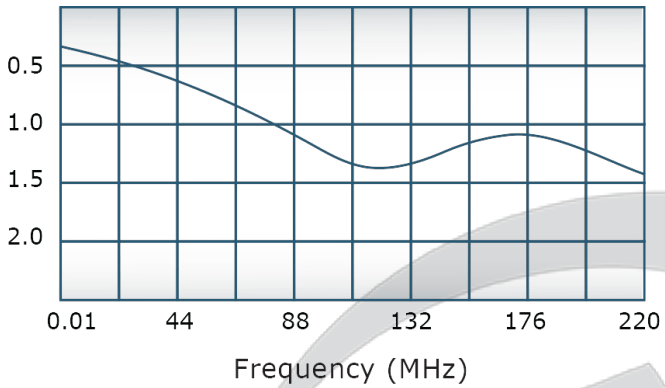


VSWR:

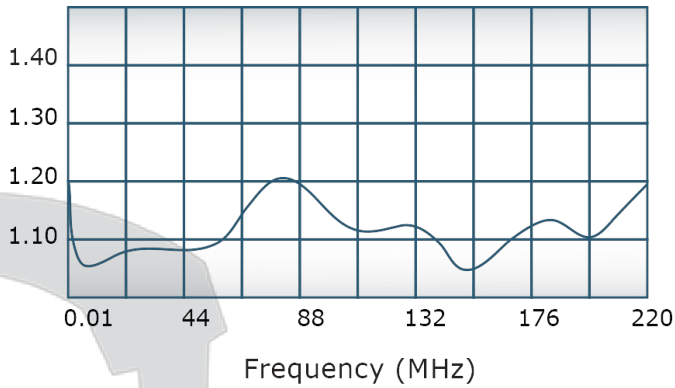

Isolation:

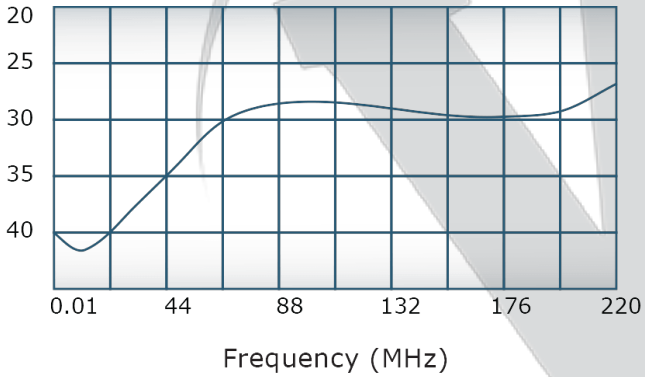


Phase Balance:

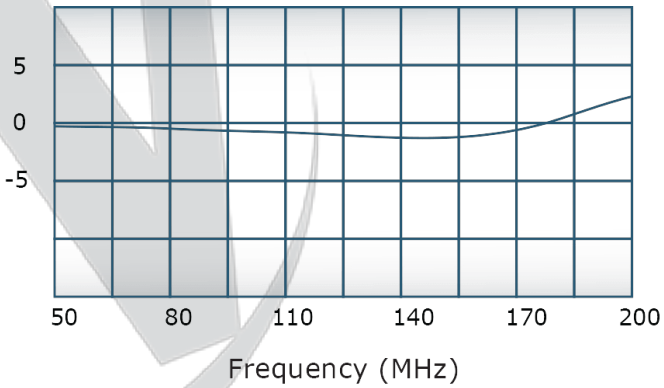


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

Werlatone, Inc.All Rights Reserved

DATE	SYM	REVISION RECORD	AUTH	DR	CK
3/21/07	A	ECN 4184 CS CS CS			
4/7/07	B	ECN 9291 CS PP CS			

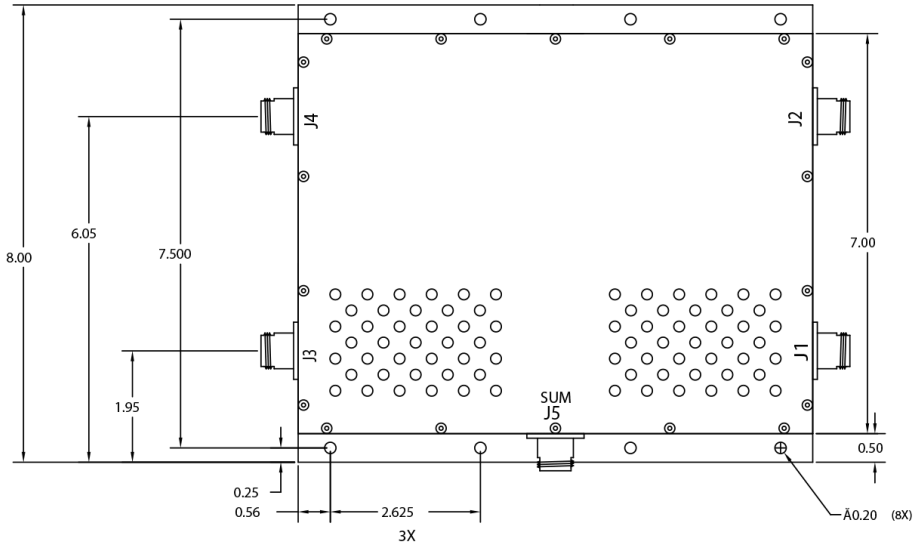

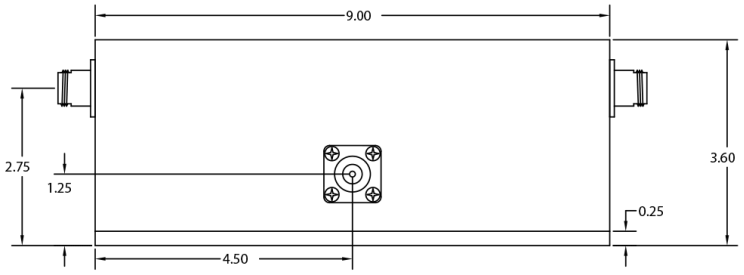

TOLERANCE	WERLATONE INC.		
XX +/- .015 XXX +/- .005		SCALE	DRAWN BY: RH APPVD BY:
	TITLE OUTLINE		
	DATE 1/5/04	DRAWING NUMBER 10245-500 B	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com