

## PRODUCT DATA SHEET

D6310

**Werlatone® Mismatch Tolerant®** High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

### Features:

High Power      Wide Bandwidths      Small Size      Custom Designs Available

### Electrical Specifications:

|                    |                 |
|--------------------|-----------------|
| Frequency:         | 2300 - 2400 MHz |
| Power:             | 200 W CW        |
| Insertion Loss:    | 0.2 dB Max.     |
| VSWR:              | 1.15:1 Max.     |
| Phase Balance:     | ± 5° Max.       |
| Amplitude Balance: | 0.2 dB Max.     |
| Isolation:         | Non-Isolated    |

### Mechanical Specifications:

|                        |   |
|------------------------|---|
| Type:                  | Connectorized   |
| Material:              | Aluminum 6061-T6  |
| Surface Finish:        | Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available |
| Operating Temperature: | -55°C to +75°C  |
| Storage Temperature:   | -60°C to +85°C  |
| Size:                  | 4.25 x 5.0 x 0.93"  |

### Connector Configurations:

| Model     | Sum Port (J17) | Input/Output (J1-J16) |
|-----------|----------------|-----------------------|
| D6310-10  | N Female       | N Female              |
| D6310-102 | SMA            | SMA                   |

**When specified, Werlatone® High Power Combiners and RF Dividers** will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

**RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION**  
 This document contains proprietary information which is the sole property of Werlatone, Inc.

| REVISION HISTORY |                 |            |          |
|------------------|-----------------|------------|----------|
| REV.             | REVISION RECORD | DATE       | APPROVED |
| A                | ECN 9696        | 10/21/2019 | RB       |

**NOTES: UNLESS OTHERWISE SPECIFIED**

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS: SMA FEMALE**  
**J1-J4: -8.5dB**  
**J5-J16: -14.5 dB**  
**J17: INPUT**

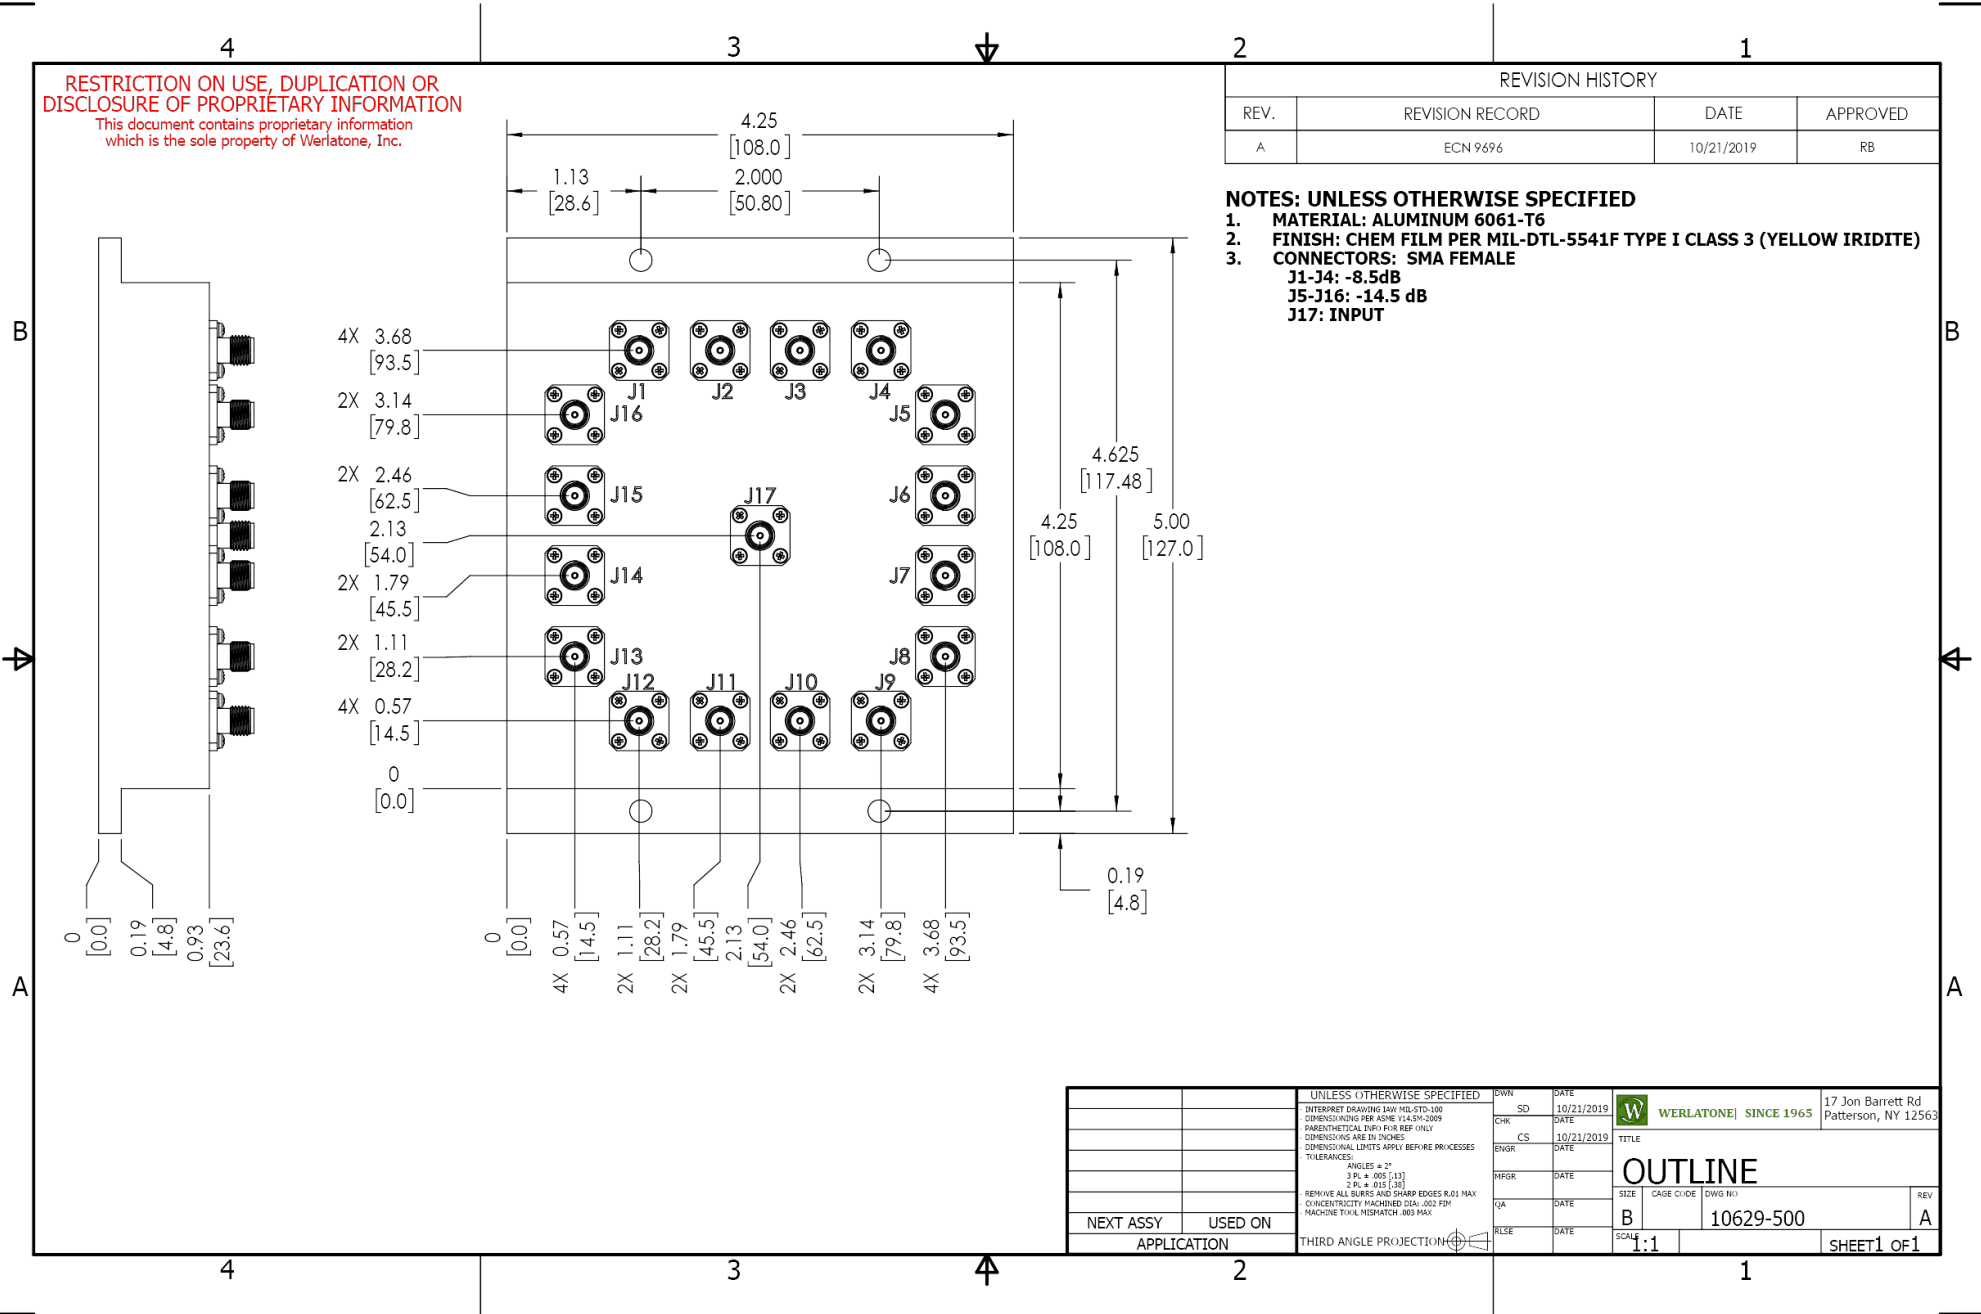

|   |         |                        |            |  |
|---|---------|------------------------|------------|--|
| UNLESS OTHERWISE SPECIFIED                |         | OWN                    | DATE       | WERLATONE SINCE 1965<br>17 Jon Barrett Rd<br>Patterson, NY 12563 |
| INTERPRET DRAWING IAW MIL-STD-100         |         | SD                     | 10/21/2019 |  |
| DIMENSIONS PER ASME Y14.5M-2009           |         | CHK                    | DATE       | TITLE  |
| PARENTHEetical INFO FOR REF ONLY          |         | CS                     | 10/21/2019 |  |
| DIMENSIONS ARE IN INCHES                  |         | ENGR                   | DATE       | <b>OUTLINE</b>   |
| DIMENSIONAL LIMITS APPLY BEFORE FINISHES  |         | MFR                    | DATE       |  |
| TOLERANCES:                               |         | QA                     | DATE       | SIZE   |
| ANGLES = 2°                               |         | RLSE                   | DATE       | CAGE CODE  |
| 3 PL ± .005 (.13)                         |         |                        |            | DWG NO   |
| 2 PL ± .015 (.38)                         |         |                        |            | REV  |
| REMOVE ALL BURRS AND SHARP EDGES R.01 MAX |         |                        |            | B  |
| CONCENTRICITY MACHINED DIA: .002 FIM      |         |                        |            | 10629-500  |
| MACHINE TOOL MISMATCH .003 DIA.           |         |                        |            | A  |
| NEXT ASSY                                 | USED ON | THIRD ANGLE PROJECTION |            | SCALE  |
| APPLICATION                               |         |                        |            | 1:1  |
|   |         |                        |            | SHEET 1 OF 1   |

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.  
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com