


PRODUCT DATA	SHEET				D6431	
Werlatone ® Mismatch Tolerant ® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide Werlatone ® designs its High Power Broadband Combiners, Power Dividers, and N- Way Combiners for proper operation in the most stringent operating conditions.						
Featu	res:					
High P	ower Wide	Bandwidths	Small Size	High Isolation	Custom Designs Available	
Electrical Specifications:						
Power: Insertia VSWR: Phase Amplit Isolatio Mecha Type: Materia Surface Operat Storag Weight Size:	Material:Aluminum 6061-T6Surface Finish:Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant AvailableOperating Temperature:-55°C to +75°CStorage Temperature:-60°C to +85°CWeight:1.5 oz.					
D6393 When adjace can be Additic	Model Sum Port (J1) Input/Output (J2) Input/Output (J3) D6393-102 SMA SMA SMA When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N Way Combiners are available upon request.					
Way C	ombiners are ava	ailable upon requ	iest.			

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



PRODUCT DATA SHEET




D6431

Performance Data (Specifications subject to change without notice): VSWR: Insertion Loss: 1.40 0 1.30 0.1 1.20 0.2 0.3 1.10 1770 1810 1750 1770 1790 1810 1830 1850 1750 1790 1830 1850 Frequency (MHz) Frequency (MHz) Isolation: Phase Balance: 20 25 5 30 0 35 -5 40 1750 1770 1790 1810 1830 1850 1770 1790 1810 1830 1850 1750 Frequency (MHz) Frequency (MHz)

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D6431 Rev.-

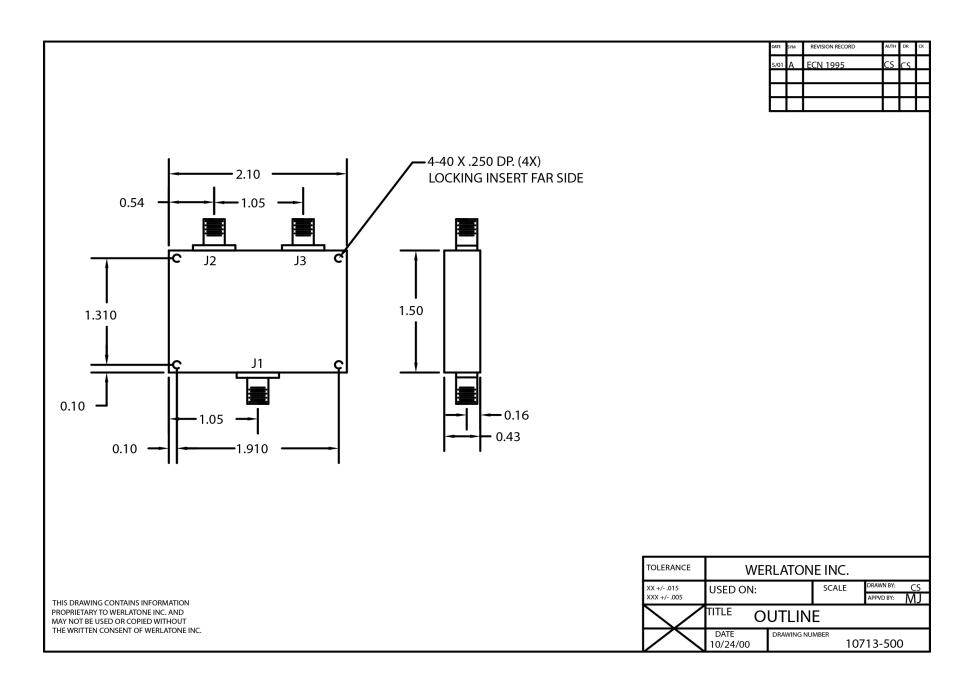

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com