
PRODUCT DATA SHEET
D6846

Werlatone® Mismatch Tolerant® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

Features:

High Power Wide Bandwidths Small Size High Isolation Custom Designs Available

Electrical Specifications:

Frequency: 1.5 - 30 MHz
 Power: 4000 W CW
 Insertion Loss: 0.35 dB Max.
 VSWR: 1.35:1 Max.
 Phase Balance: ± 5° Max.
 Amplitude Balance: 0.2 dB Max.
 Isolation: 20 dB Min.


Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Weight: 32.0 lbs.
 Size: 19.0 x 16.98 x 5.22"

Connector Configurations:

Model	Input/Output (J1-J6)	Sum Port (J7)	J10
D6846-50	N Female	C Female	9 Pin D

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.




PRODUCT DATA SHEET


D6846

Performance Data (Specifications subject to change without notice):


Insertion Loss:

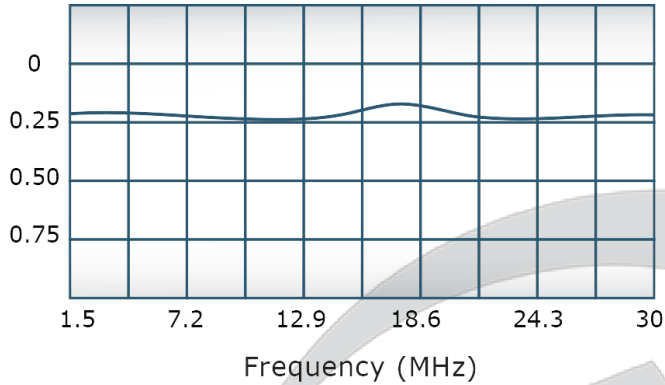


VSWR:

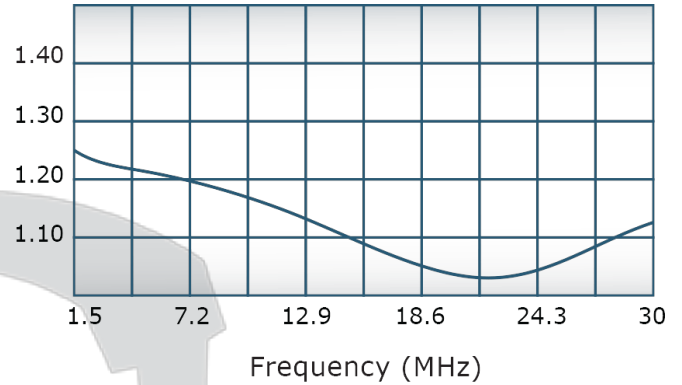

Isolation:

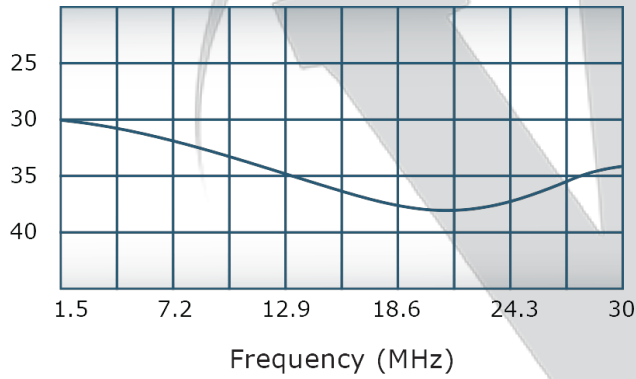

Phase Balance:

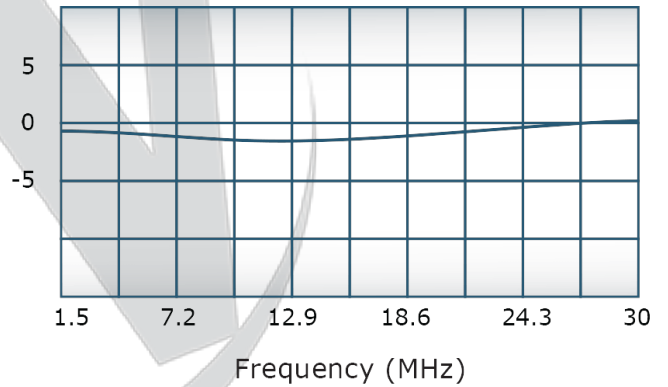


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of

Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	8/3/2012	
A	ECN 9300	4/20/2017	CS






VIEW FOR REFERENCE ONLY



VIEW D-D

GROUND STUD
 PEM # FHS-0420-16

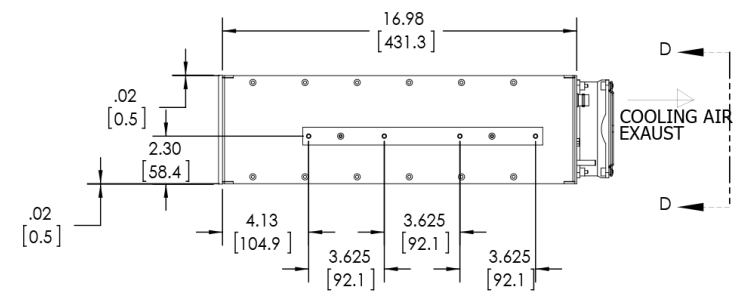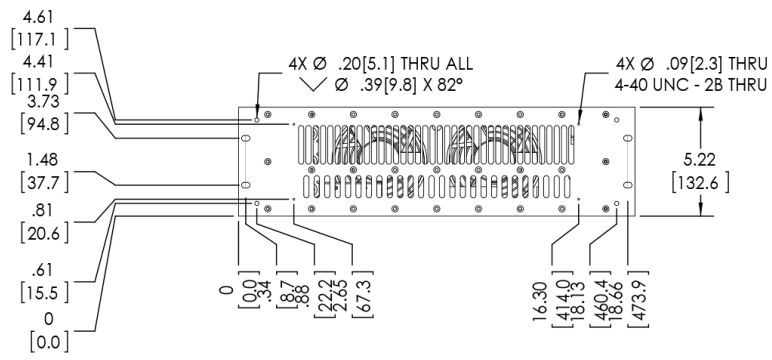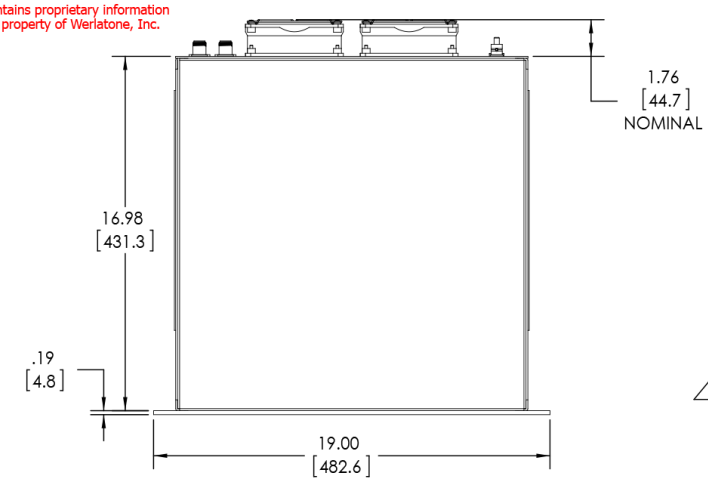

UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563
INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		SC	8/3/2012		
DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		CHK	DATE	TITLE	
DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED		CS		OUTLINE	
DIMENSIONAL UNITS APPLY BEFORE PROCESSES		ENGR	DATE	SIZE	CAGE CODE (DWG NO)
TOLERANCES:		MPGR	DATE	B 28812	10875-500
ANGLES = 3°		QA	DATE	SCALE	REV
3 PL ± .006 [13]		RELSE	DATE	1:5	A
2 PL ± .015 [38]					
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX					
CONCENTRICITY FRACTURED DIA. .002 FPM					
MACHINE TOOL MISMATCH .003 MAX					
NEXT ASSY	USED ON	THIRD ANGLE PROJECTION			
APPLICATION		SHEET 1 OF 1			

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com