



PRODUC	CT DATA SHEET				D849	6
	<b>Werlatone Mismatch Tolerant</b> High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide <b>Werlatone</b> designs its High Power Broadband Combiners, Power Dividers, and N Way Combiners for proper operation in the most stringent operating conditions.					
	Features:					
	High Power Wide B		hs Small Size	High Isolation	Custom Designs Available	
	Electrical Specifications:					
	Frequency: $30 - 90 \text{ MHz}$ Power: $50 \text{ W CW}$ Insertion Loss: $0.25 \text{ dB Max}$ .VSWR: $1.25:1 \text{ Max}$ .Phase Balance: $\pm 4^{\circ} \text{ Max}$ .Amplitude Balance: $0.1 \text{ dB Max}$ .Isolation: $25 \text{ dB Min}$ .					
	Mechanical Specifications:					
	Type: Material: Surface Finish: Operating Tem Storage Tempo Weight: Size:	perature:	Connectorized Aluminum 6061-T6 Chem. Film Per MIL-D 3 (Yellow Iridite) RoH9 -55°C to +75°C -60°C to +85°C 1 lb. 7.7 oz. (-113) 3.4 x 3.4 x 2.25"			
	Connector Co	onfigurations:				
	Model	Sum Port (J1)	Input/Output (J2)	Input/Out	put (J3)	
	D8496-10 D8496-12 D8496-102 D8496-113	N Female N Female SMA BNC	N Female SMA SMA BNC	N Female SMA SMA BNC		

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D8496 Rev.-



## **PRODUCT DATA SHEET**



D8496


VSWR: Insertion Loss: 1.40 0 1.30 0.12 1.20 0.24 0.36 1.10 42 90 30 42 54 66 78 90 30 54 66 78 Frequency (MHz) Frequency (MHz) Isolation: Phase Balance: 10 5 20 0 30 -5 40 30 42 54 66 78 90 42 54 66 78 90 30 Frequency (MHz) Frequency (MHz)

Performance Data (Specifications subject to change without notice):

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D8496 Rev.-

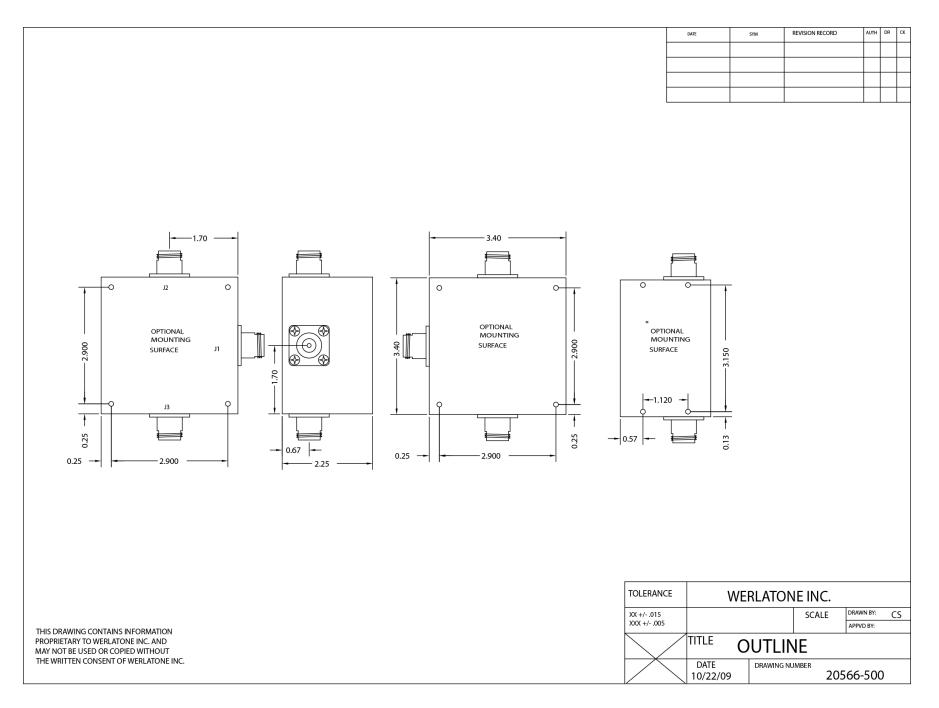

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com