WERLATONE

Model D8632
Combiners In-Phase Connectorized



PRODUCT DATA SHEET **D8632**

Werlatone® ***Mismatch Tolerant®*** High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

Features:

High Power | Wide Bandwidths | Small Size | High Isolation | Custom Designs Available

Electrical Specifications:

Frequency:	20 - 1000 MHz
Power:	50 W CW
Insertion Loss:	0.7 dB Max.
VSWR:	1.40:1 Max.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.3 dB Max.
Isolation:	20 dB Min.

Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Weight:	4 oz.
Size:	2.2 x 1.5 x 0.9''

Connector Configurations:

Model	**Sum Port (J1)**	**Input/Output (J2)**	**Input/Output (J3)**
D8632-102	SMA	SMA	SMA
D8632-102RA	Right Angle SMA	Right Angle SMA	Right Angle SMA


When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




Performance Data (Specifications subject to change without notice):


Insertion Loss:

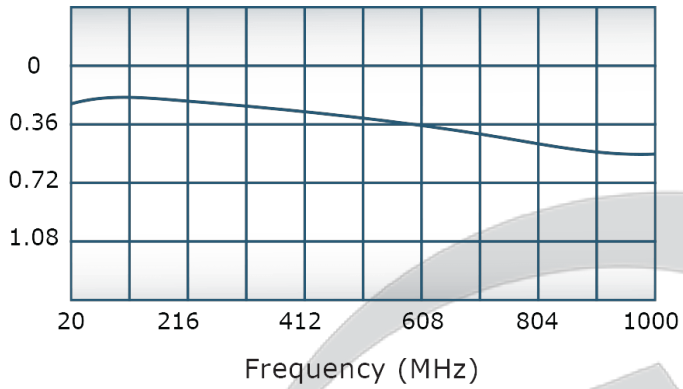


VSWR:

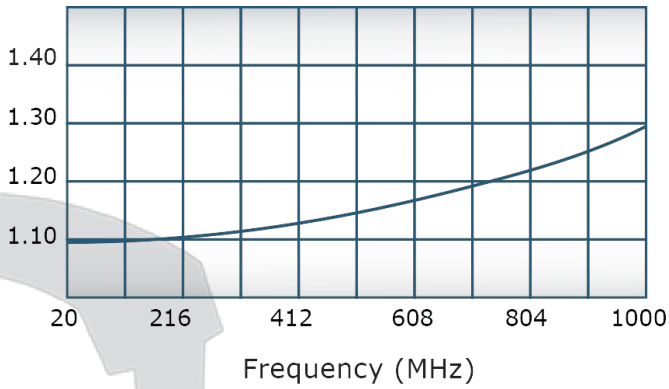

Isolation:

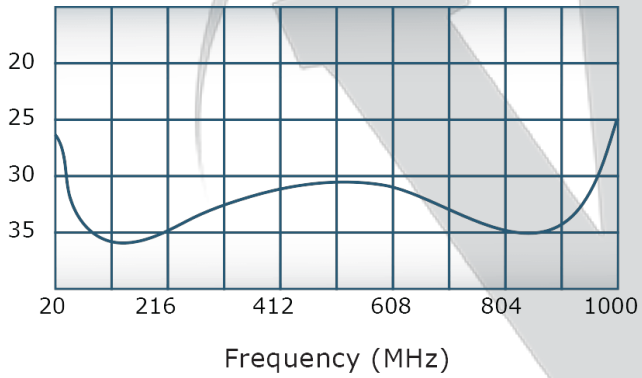


Phase Balance:

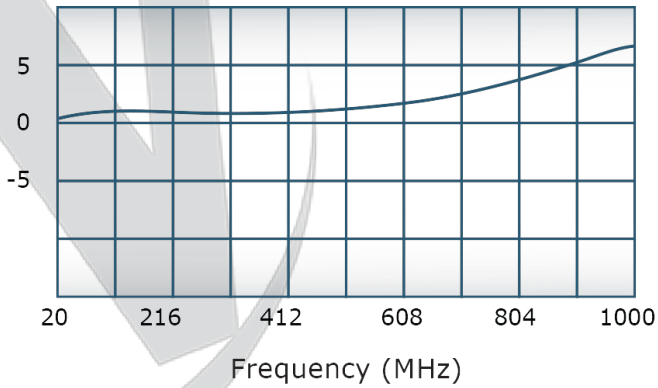

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY					
DATE	REV	REVISION RECORD	AUTH	CHK	APPV

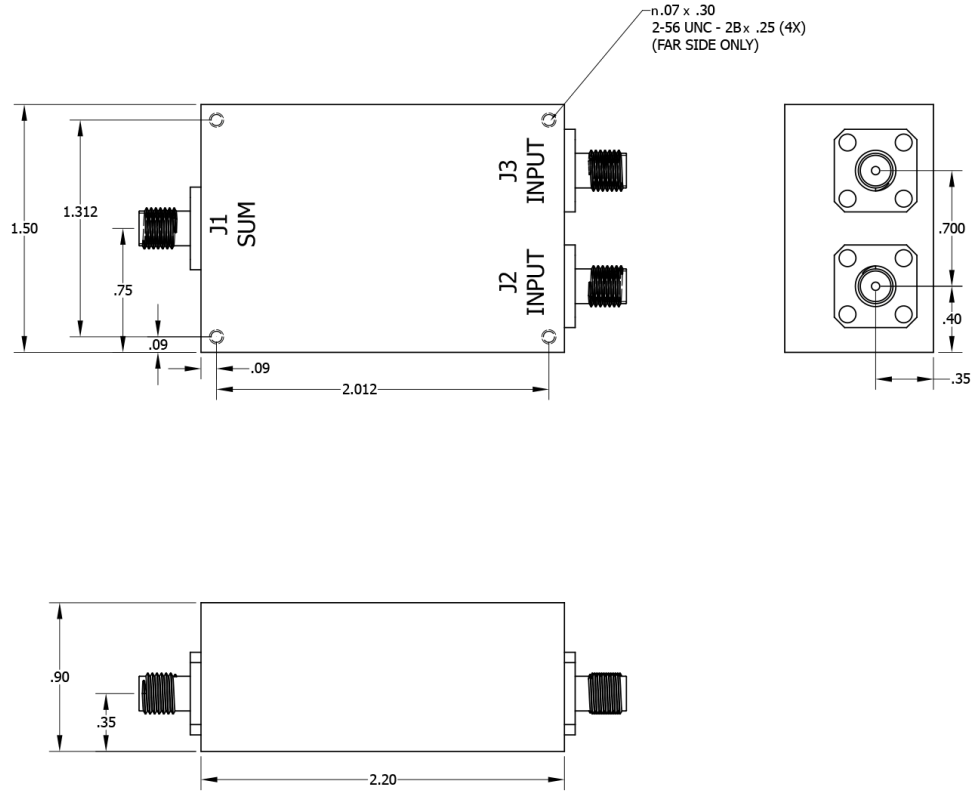

UNLESS OTHERWISE SPECIFIED					
° INTERPRET DRAWING IAW MIL-STD-100 ° DIMENSIONING PER ASME Y14.5M-2009 ° PARENTHETICAL INFO FOR REF ONLY ° DIMENSIONS ARE IN INCHES ° DIMENSIONAL LIMITS APPLY BEFORE PROCESSES ° TOLERANCES: ANGLES ± 2° .XXX ± .005 .XX ± .015 THIRD ANGLE PROJECTION	DWN	NH	DATE	4/29/2010	WERLATONE | SINCE 1965 2095 Route 22 Brewster, NY 10509
	CHK	BW	DATE	4/29/2010	TITLE: OUTLINE
	ENGR	BW	DATE	4/29/2010	USED ON
	MFGR		DATE		
	QA		DATE		SIZE: A | CAGE CODE: 28812 | DWG NO: 20630-500 | REV
	RLSE		DATE		SCALE | SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com