

PRODUCT DATA SHEET

WPM11357

Instantaneous & Simultaneous

- Local and/or Remote Monitoring
- Forward Power Reading/Monitoring (Watts or dBm)
- Reverse Power Reading/Monitoring (Watts or dBm)
- VSWR Readings (Watts, Return Loss, Rho)

VSWR Alarm

- Customer can set up audio/visual alarm via relay contacts.
- Signal sent to closed loop.

Temperature Monitoring (with alarm)

- One sensor, internal measurement, within Power Meter.
- One sensor, external measurement, to be placed by customer.

General Purpose Inputs (6 ea) Multiple Use

- Track switch closures (assign to interlock group).
- Trigger alarm relay (sends email alert).
- RF presence status/alarm (saftey feature).
- Alarm, activated switch.

Accessories:

- Single Channel and Multi-Channel Displays
- RF Digital Dashboard Spreadsheet Software, (Simultaneously Monitor Outputs of 30+ Power Meters
- PC Based Graphical User Interface Windows XP/7/8/10 Compatible

Accuracy:

- $\pm 2\%$ to Customer Calibration Standard, at preselected frequencies.
- $\pm 5\%$ over a Multi-Octave Bandwidth
- Werlatone Calibration Traceable to (NIST) National Institute of Standards and Technology

Power:

- AC Power Adapter (100/240 50-60 Hertz V AC)
- POE (Passive Over Ethernet, Optional POE Injector Kit Available
- Via RS485 (Via Single Channel or Multi-Channel Displays)

Interface (Via):

- TCP/IP - SNMP and Browser Interface via Local Area Network
- RS232, Serial
- RS485 - Form Addressable Serial Network
- User ID and Password Protected for Access and Control
- Multiple units can be Networked and Simultaneously Monitored On-Site or Remotely (TCP/IP/SNMP/Serial)

RoHS Compliant Design Available
Custom Connector Configurations Available

Electrical Specifications:

Frequency: 1.5 - 32 MHz
Power: 5,000 W CW

Mechanical Specifications:


Type: Connectorized
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C


Connector Configurations:

Model	Input(J1)	Output(J2)
WPM11357-22	7/16 Female	7/16 Female
WPM11357-32	LC Female	LC Female
WPM11357-63	HN Male	HN Female

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	10/15/2018	CS

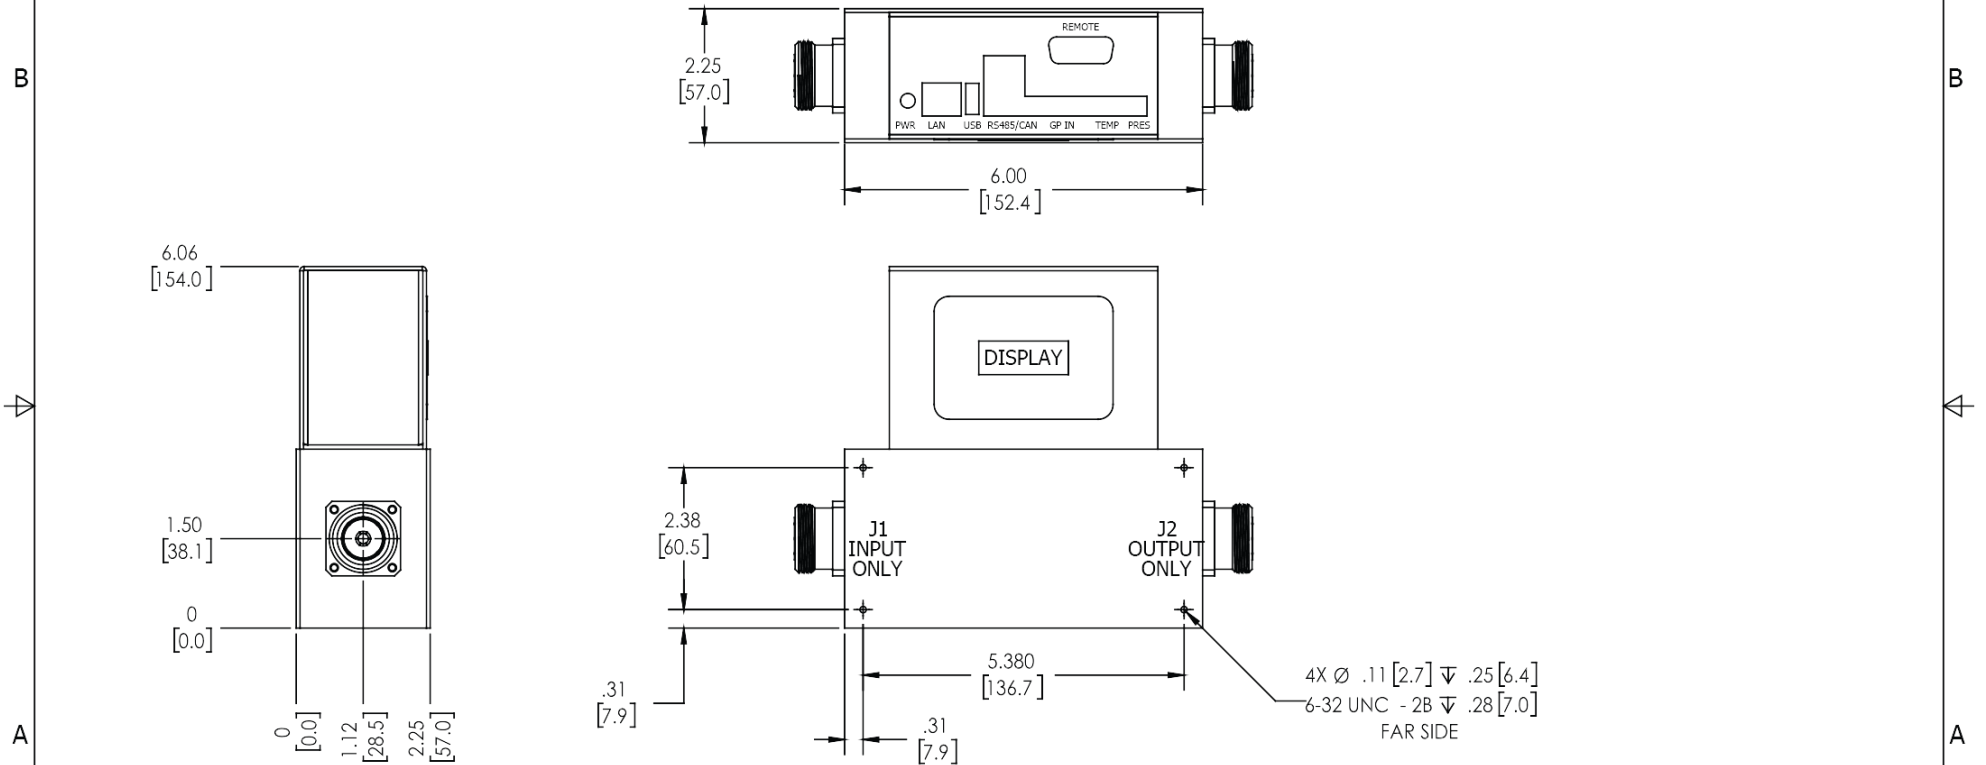

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	<div> WERLATONE SINCE 1965</div> <div>17 Jon Barrett Rd Patterson, NY 12563</div>	
		• INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009		PLP	9/27/2018		
		• DIMENSIONS ARE IN INCHES (MM)		CHK	DATE		
		• DIMENSIONAL LIMITS APPLY BEFORE FINISHES		CS	10/15/2018		
		• TOLERANCES:		ENGR	DATE		
		ANGLES: 8° ± 2°		MPGR	DATE		
		3 PL ± .015 (1.3)		QA	DATE		
		2 PL ± .015 (1.3)		RELSE	DATE		
		• REMOVE ALL BURRS AND SHARP EDGES R.01 MAX					
		• CONCENTRICITY MACHINED DIA: .002 FDI					
		• MACHINE TOOL PREPARATION .003 MAX					
NEXT ASSY		USED ON		SCALE		SHEET 1 OF 1	
APPLICATION		THIRD ANGLE PROJECTION		1:2			

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com