WERLATONE

Model WPM11188
Coaxial Power Meters



PRODUCT DATA SHEET **WPM11188**

Instantaneous & Simultaneous
- Local and/or Remote Monitoring
- Forward Power Reading/Monitoring (Watts or dBm)
- Reverse Power Reading/Monitoring (Watts or dBm)
- VSWR Readings (Watts, Return Loss, Rho)

VSWR Alarm
- Customer can set up audio/visual alarm via relay contacts.
- Signal sent to closed loop.

Temperature Monitoring (with alarm)
- One sensor, internal measurement, within Power Meter.
- One sensor, external measurement, to be placed by customer.

General Purpose Inputs (6 ea) Multiple Use
- Track switch closures (assign to interlock group).
- Trigger alarm relay (sends email alert).
- RF presence status/alarm (saftey feature).
- Alarm, activated switch.

Accessories:
- Single Channel and Multi-Channel Displays
- RF Digital Dashboard Spreadsheet Software, (Simultaneously
Monitor Outputs of 30+ Power Meters
- PC Based Graphical User Interface Windows XP/7/8/10 Compatible

Accuracy:
- ± 2% to Customer Calibration Standard, at preselected frequencies.
- ± 5% over a Multi-Octave Bandwidth
- Werlatone Calibration Traceable to (NIST) National Institute of Standards and Technology

Power:
- AC Power Adapter (100/240 50-60 Hertz V AC)
- POE (Passive Over Ethernet, Optional POE Injector Kit Available
- Via RS485 (Via Single Channel or Multi-Channel Displays)

Interface (Via):
- TCP/IP - SNMP and Browser Interface via Local Area Network
- RS232, Serial
- RS485 - Form Addressable Serial Network
- User ID and Password Protected for Access and Control
- Multiple units can be Networked and Simultaneously Monitored On-Site or Remotely (TCP/IP/SNMP/Serial)

RoHS Compliant Design Available
Custom Connector Configurations Available

Electrical Specifications:

Frequency:	380 - 400 MHz
Power:	1000 W CW

Mechanical Specifications:

Type:	Connectorized
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C

Connector Configurations:

Model	Input(J1)	Output(J2)
WPM11188-12	N Female	N Female
WPM11188-22	7/16 Female	7/16 Female


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


Werlatone, Inc.All Rights Reserved


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	8 11 2017	CS

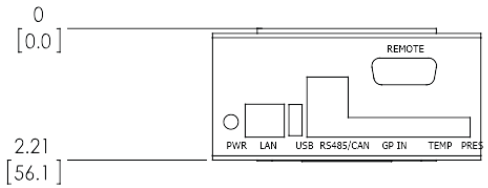

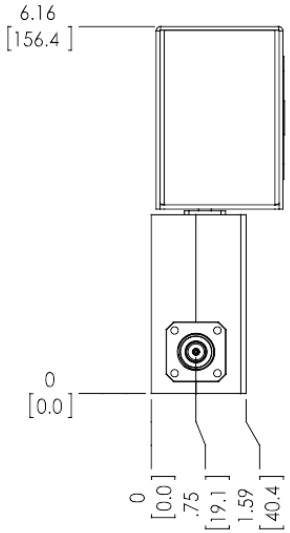

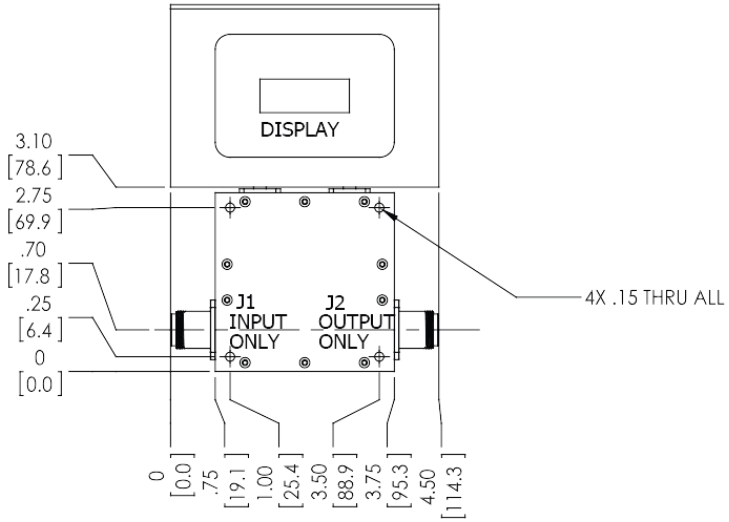

		UNLESS OTHERWISE SPECIFIED	DWN	PLP	DATE 8/10/2017	WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563
		• INTERPRET DRAWING IAW MIL-STD-100 • DIMENSIONING PER ASME Y14.5M-2009 • PARENTHETICAL INFO FOR REF ONLY • DIMENSIONS ARE IN INCHES [mm] • DIMENSIONAL LIMITS APPLY BEFORE PROCESSES • TOLERANCES: ANGLES ± 2° 3 PL ± .005 [.13] 2 PL ± .015 [.4] • REMOVE ALL BURRS AND SHARP EDGES R.01 MAX • CONCENTRICITY MACHINED DIA: .002 FIM • MACHINE TOOL MISMATCH .003 MAX	CHK	CS	DATE 8/10/2017	TITLE	
			ENGR		DATE		
			MFGR		DATE		
	WPM11072		QA		DATE	SIZE B / CAGE CODE 28812 / DWG NO 21511-503	REV -
NEXT ASSY	USED ON		RLSE		DATE	SCALE 1:2	SHEET 1 OF 1
APPLICATION		THIRD ANGLE PROJECTION					

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com