



PRODUCT DATA SHEET

WPM11380

Instantaneous & Simultaneous

- Local and/or Remote Monitoring
- Forward Power Reading/Monitoring (Watts or dBm)
- Reverse Power Reading/Monitoring (Watts or dBm)
- VSWR Readings (Watts, Return Loss, Rho)

VSWR Alarm

- Customer can set up audio/visual alarm via relay contacts.
- Signal sent to closed loop.

Temperature Monitoring (with alarm)

- One sensor, internal measurement, within Power Meter.
- One sensor, external measurement, to be placed by customer.

General Purpose Inputs (6 ea) Multiple Use

- Track switch closures (assign to interlock group).
- Trigger alarm relay (sends email alert).
- RF presence status/alarm (safety feature).
- Alarm, activated switch.

Accessories:

- Single Channel and Multi-Channel Displays
- RF Digital Dashboard Spreadsheet Software, (Simultaneously Monitor Outputs of 30+ Power Meters)
- PC Based Graphical User Interface Windows XP/7/8/10 Compatible

Accuracy:

- $\pm 2\%$ to Customer Calibration Standard, at preselected frequencies.
- $\pm 5\%$ over a Multi-Octave Bandwidth
- Werlatone Calibration Traceable to (NIST) National Institute of Standards and Technology

Power:

- AC Power Adapter (100/240 50-60 Hertz V AC)
- POE (Passive Over Ethernet, Optional POE Injector Kit Available)
- Via RS485 (Via Single Channel or Multi-Channel Displays)

Interface (Via):

- TCP/IP - SNMP and Browser Interface via Local Area Network
- RS232, Serial
- RS485 - Form Addressable Serial Network
- User ID and Password Protected for Access and Control
- Multiple units can be Networked and Simultaneously Monitored On-Site or Remotely (TCP/IP/SNMP/Serial)

RoHS Compliant Design Available
Custom Connector Configurations Available

Electrical Specifications:

Frequency: 1.5 - 100 MHz
Power: 10,000 W CW

Mechanical Specifications:


Type: Connectorized
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C

Connector Configurations:

Model	Input(J1)	Output(J2)
WPM11380-22	7/16 Female	7/16 Female
WPM11380-32	LC Female	LC Female
WPM11380-QC-2	QC Block	QC Block

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	10/15/2018	CS

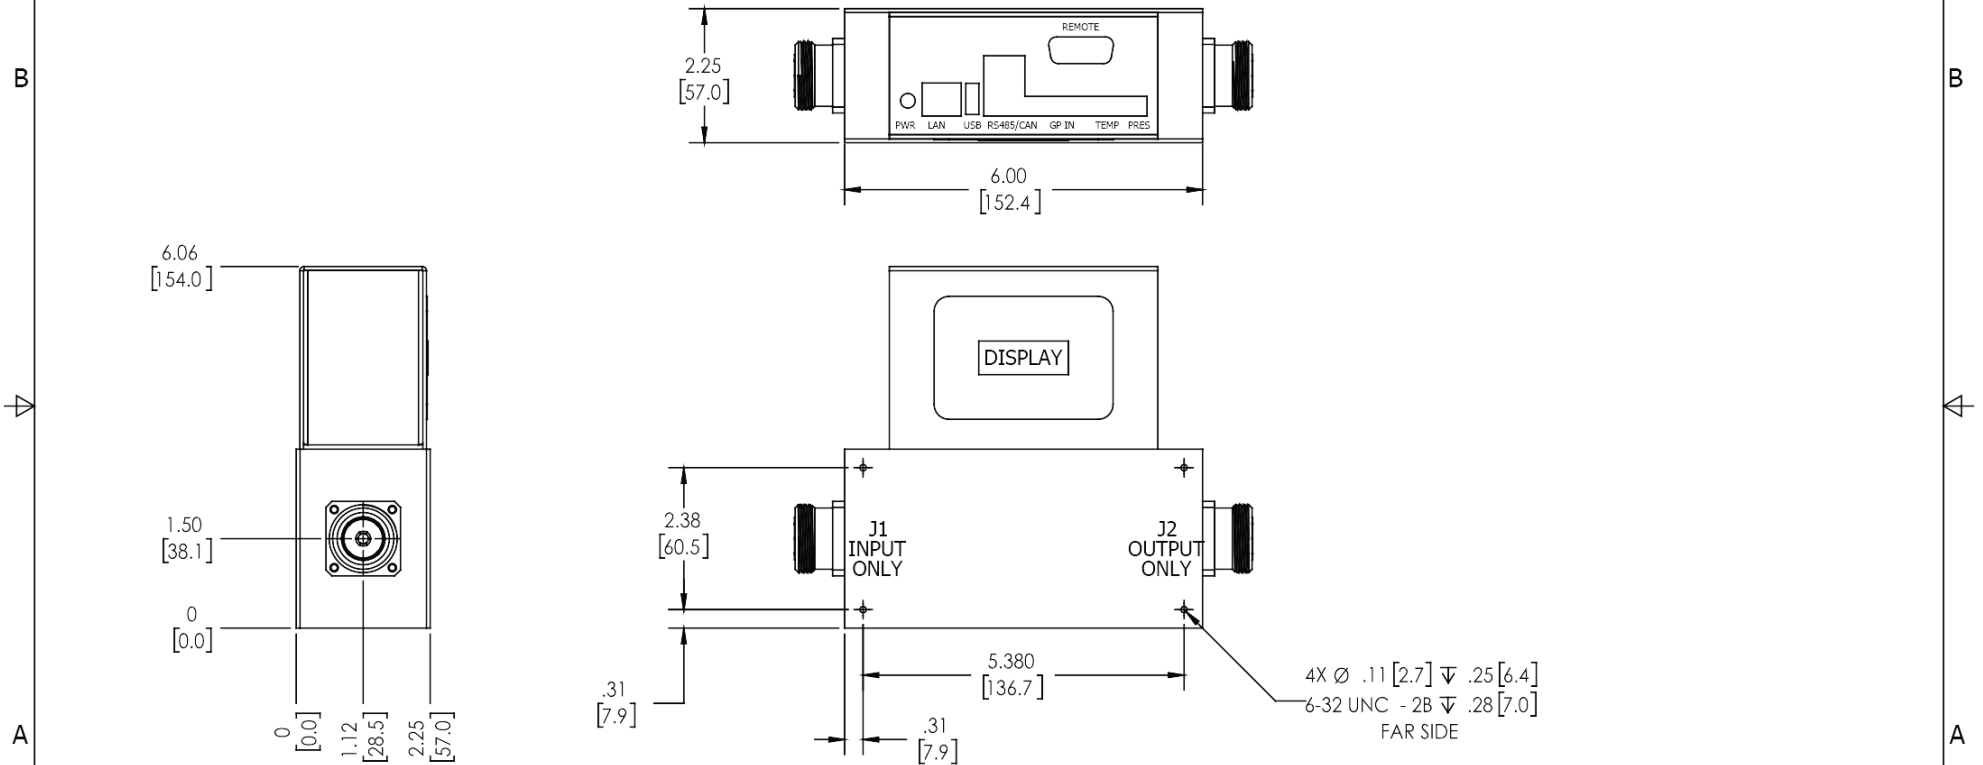

UNLESS OTHERWISE SPECIFIED				OWN	DATE	17 Jon Barrett Rd Patterson, NY 12563	
• INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009	PLP	9/27/2018	DATE	FLP	9/27/2018	WERLATONE SINCE 1965	
• DIMENSIONS ARE IN INCHES (MM)	CHK	DATE	DATE	CS	10/15/2018		
• DIMENSIONAL LIMITS APPLY BEFORE FINISHES	ENGR	DATE	DATE	DATE	DATE	TITLE	
• TOLERANCES:	DATE	DATE	DATE	DATE	DATE	OUTLINE	
• ANGLES: 8° & 2°	DATE	DATE	DATE	DATE	DATE	SIZE	CAGE CODE
• 3 PL ± .005 (1.3)	DATE	DATE	DATE	DATE	DATE	B	28812
• 2 PL ± .015 (1.3)	DATE	DATE	DATE	DATE	DATE	21650-500	DWG NO
• REMOVE ALL BURRS AND SHARP EDGES R.01 MAX	DATE	DATE	DATE	DATE	DATE	1:2	SCALE
• CONCENTRICITY MACHINED DIA: .002 FDI	DATE	DATE	DATE	DATE	DATE	1	SHEET 1 OF 1
• MACHINE TOOL PREPARATION .003 MAX	DATE	DATE	DATE	DATE	DATE	1	SHEET 1 OF 1
APPLICATION	DATE	DATE	DATE	DATE	DATE	1	SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com